

以品质为根, 服务为本; 以创新为翼, 诚信为基
Quality as the root, service-oriented; With innovation as the wing, integrity as the basis



浙江林耐流体科技有限公司

ZHEJIANG LINNAI FLUID TECHNOLOGY CO., LTD

手机/Mob: 15805742117

电话/Tel: 0577-86172117

邮箱/E-mail: zjlinnai@cnlinnai.com

地址/Add: 浙江省温州市龙湾区刘宅三路358号

No.358 Liu Zhai 3 Road, Longwan District, Wenzhou, Zhejiang



WeChat

上海林耐流体设备有限公司

SHANGHAI LINNAI FLUID EQUIPMENT CO., LTD

传真/Fax: 0577-86178163

邮箱/E-mail: shlinnai@cnlinnai.com

地址/Add: 上海市奉贤区新泰公路4498号

4498 Xinfeng Road, Fengxian District, Shanghai



www.cnlinnai.com



过渡接头专业制造商
PROFESSIONAL ADAPTORS MANUFACTURER

ABOUT US


Zhejiang Linnai Fluid Technology Co., Ltd. is an innovative fluid technology enterprise, many years adhering to the "quality as the root, service-oriented; With innovation as the wing, integrity as the basis of "production management business philosophy." The factory is located in Longwan District, Wenzhou, the capital of stainless steel, and the Shanghai office is located in Fengxian District, the commercial capital of Shanghai. There are more than dozens of employees, with sophisticated machining equipment and testing means, so that the product factory pass rate reaches 100%, better guarantee the product quality and purchase experience, and strive to solve the customer's pain points and difficulties.

The company is deeply engaged in the design, development and production of hydraulic joints, transition joints, hose joints, industrial joints, hydraulic hose assembly, metal hose assembly, etc., with many years of industry experience. Products are widely used in engineering machinery, ship construction, ocean engineering, aerospace, petrochemical, paper industry, food and pharmaceutical, new energy, semiconductor and so on.

Linnai with mature technology and advanced management concepts, to bring you quality assurance, after-sales peace of mind, happy service. Xing in quality, loyal to customers, is our consistent purpose, heart service is our consistent style, customer satisfaction is our greatest wish. In the future, we will continue to cooperate wholeheartedly with new and old customers to create brilliant future.



关于我们

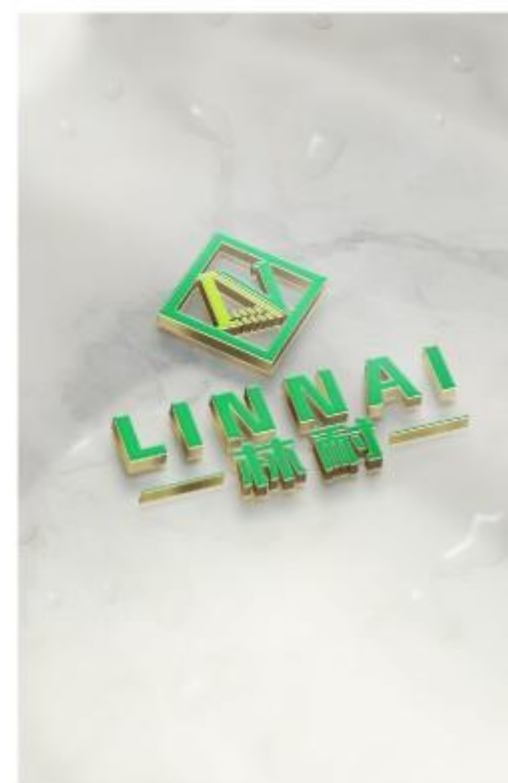

浙江林耐流体科技有限公司是一家创新型流体科技企业，多年秉承“以品质为根，服务为本；以创新为翼，诚信为基”的生产管理经营理念。工厂座落于不锈钢之都温州市龙湾区，上海办事处座落于商业之都上海市奉贤区。现有职工几十余人，拥有精良的机械加工设备及检测手段，使产品出厂合格率达到100%，更好的保障了产品的使用质量和购买体验，极力解决了客户的痛点和难点。

公司深耕于设计研发及生产液压接头、过渡接头、软管接头、工业接头、液压胶管总成、金属软管总成等，拥有多年行业经验。产品广泛应用于工程机械、船舶建造、海洋工程、航空航天、石油化工、造纸工业、食品制药、新能源、半导体等。

林耐以成熟的技术和先进的管理理念，带给您质量的保证，售后的安心，服务的愉快。兴于品质、忠于客户，是我们奉行的一贯宗旨，用心服务是我们一贯作风，用户满意是我们的最大心愿。今后，我们将一如既往与新老客户竭诚合作，共创辉煌。



PROFESSIONAL PRODUCTION OF FLUID CONNECTORS



专注·积淀

Focus and Accumulation

持续为客户提供满意的产品和方案！



精艺·匠心

Exquisite craftsmanship and craftsmanship


坚持精湛工艺与设计结合的智造！







































创新·技术




Innovation and Technology

持续的技术升级和人才引进！

密封接头	公制螺纹O形圈平面密封	 1E P102  1E9 P102  AE P103  2E9 P103  1EH P104  1EH9-OG P104
	公制螺纹卡套接头	 1EL P105  1ET-SP P105  1C,1D P106  1C/1D P107  1C9,1D9 P108  AC,AD P109  2C P100
卡套接头	公制螺纹卡套接头	 2D P111  2C9,2D9 P112  BC,BD P113  CC,CD P114  3C,3D P115  4C,4D P116  9C,9D P117
	英制螺纹卡套接头	 6C,6D P118  6C9,6D9 P119  8C P120  2WE P120  1CN,1DN P121  1CN9,1DN9 P122  1CT-SP,1DT-SP P123
卡套接头	英制螺纹卡套接头	 1CT9-SP,1DT9-SP P124  1CH,1DH P125  1CH9-OG,1DH9-OG P126  ACCH-OG,ADDH-OG P127  ACHC-OG,ADHD-OG P128
	英制螺纹卡套接头	 1CG,1DG P129  1CG9-OG,1DG9-OG P130  ACCG-OG,ADDG-OG P131  ACGC-OG,ADGD-OG P132
卡套接头	英制螺纹卡套接头	 1CO,1DO P133  1CO9-OG,1DO9-OG P134  ACCO-OG,ADDO-OG P135  ACOC-OG,ADOD-OG P136
	卡套接头	 1CB-WD,1DB-WD P137  2BC-WD,2BD-WD P138  2WC,2WD P139  1CM-WD,1DM-WD P140
卡套接头	卡套接头	 2MC-WD,2MD-WD P141  1CI-WD,1DI-WD P142  1CI-BWD,1DI-BWD P143  1CW,1DW P144  1C-Y,1D-Y P145  5CB,5DB P146
	卡套接头	 5CB-G,5DB-G P147  7BC-GS,7BD-GS P147  5CM,5DM P148  NL,NS P149  RL,RS P150

密封接头	公制螺纹74° 锥密封接头	 1Q P151  AQ P151  2Q9 P152  4Q P152  6Q P153  1QN P154
	公制螺纹74° 锥密封接头	 1QN9 P155  1QT-SP P156  1QT9-SP P156  NB200-Q P157  NB500-Q P157
密封接头	日式英管螺纹 60° 锥密封接头	 1S P158  4S P158  6S P158  1SG P159  1SG9-OG P159  1ST-SP P160  1ST9-SP P161
	英管螺纹60° 锥密封接头	 1B P162  1B9 P163  AB P163  2B P164  2B9 P164  BB P165
密封接头	英管螺纹60° 锥密封接头	 CB P165  3B P165  3B9 P166  DB P167  4B P167  9B P168
	英管螺纹60° 锥密封接头	 6B P168  1BT-SP P169  1BT4-SP P170  1BT9-SP P171  1BN P172  1BN9 P173
密封接头	英管螺纹60° 锥密封接头	 1BG P174  1BG9-OG P174  1BJ P175  1BL P176  1BM P177  1BW P178
	英管螺纹60° 锥密封接头	 2WB P178  1B-WD P179  2BJ-WD P179  2NB P180  2NB9 P180  2TB-SP P181
密封接头	英管螺纹60° 锥密封接头	 2TB9-SP P181  4BN-WD P182  4B-WD P182  5B P183  5B9 P184  7B P184
	英管螺纹60° 锥密封接头	 7TB-S P185  7B9-PK P185  GB-PK P186
密封接头	英管螺纹60° 锥密封接头	 5BN P186  5B-WD P187  5BT P188  2B-G P188
	英管螺纹60° 锥密封接头	

BS PT 接头	英制管螺纹 BSPT接头	 1T-SP P189	 1T9-SP P189	 4T-SP P190	 4TN P190	 5T-SP P191	 5T9-SP P191
		 7T P192	 7T9-PK P192	 GT-PK P193			
	美制管螺纹 NPT接头	 1N9 P193	 1N P194	 4N P195	 4NN P195	 5N P196	 5N9 P197
		 JN P197	 HN P198	 7N P198	 7N9-PK P199	 GN-PK P199	
		 1NO P200	 5NO P200	 5ON P201	 5GN P201		
扩口 接头		 1J P202	 1J9 P203	 AJ P203	 2J P204	 2J9 P205	 5J-S P206
		 BJ P207	 CJ P207	 DJ P208	 2WJ P208	 3J P209	 4J P209
		 9J P210	 9J-CAP P210	 6J P211	 6J9 P211	 1JN P212	
		 1JN9 P213	 AJJN P214	 AJNJ P214	 2NJ P215	 5JN P216	 5JN9 P216
扩口 接头	美制螺纹74° 锥 面扩口接头	 1JT-SP P217	 1JT9-SP P218	 7NJ-S P219	 2TJ-SP P219	 1JO P220	 1JO9-OG P221
		 AJJO-OG P222	 AJJOJ-OG P222	 1JG P223	 1JG9-OG P224	 AJGJ-OG P225	 AJJG-OG P225
		 1JB-WD P226	 1JM-WD P227	 2OJ P227	 NB200 P228	 NB300 P229	 NB500 P229

密封接头	美制螺纹O形圈平面密封ORFS接头						
		1F P230	1F9 P230	2F P231	2F9 P232	AF P232	CF P233
							
		3F P233	4F P234	9F P234	6F P235	8F P235	1FO P236
	美制螺纹O形圈平面密封ORFS接头						
		1FO9-OG P237	AFFO-OG P238	AFOF-OG P238	2OF P239	2OF9-OG P239	NB200-F P240
							
	NB300-F P240	NB500-F P240	2NU P241	7NU-S P241	2NU9 P242	7NU9-S P242	
法兰接头	6162法兰接头						
		1CFL, 1DFL P243	1CFL9, 1DFL9 P243	1DFS P244	1DFS9 P244	1JFL P245	1JFL9 P245
							
		1JFS P246	1JFS9 P246	1FSW P247	1FLW P247	FL P248	FS P248
							
		FL-W P249	FS-W P249	4FL P250	4FS P250	4FL-M P251	4FS-M P251
其他接头	其他接头						
		4MN-WD P252	4O P252	4H P253	4ON P253		
							
		5O P254					



过渡接头代号说明

1 直通过渡接头代号




2 角弯过渡接头代号：在直通过渡接头型号后加“4”表示 45° 弯曲过渡接头，在直通过渡接头型号后加“9”表示 90° 弯曲过渡接头。如 1BG9-04OG,1JT4-08-06 等。

3 三通过渡接头代号



4 四通过渡接头代号

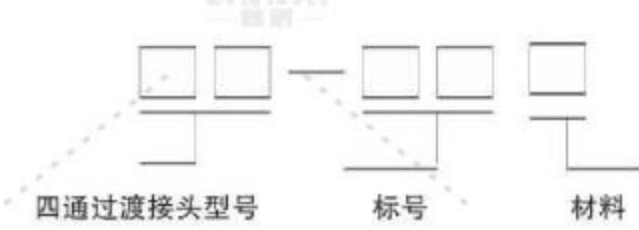

对四通过渡接头一般四端都相同，因此只注一个标号。如四端不同，则第一组表示左端，第二组表示上端，第三组表示右端，第四组表示下端。

5 当材料代号为碳钢时,则不标注材料代号,其他材料的代号如下表所示。

材料	碳钢	铜	不锈钢
代号	—	BR	SS


6 标号根据螺纹或尺寸大小来规定,具体按下表所示。

英管 螺纹	G1/8" x28	G1/4" x19	—	G3/8" x19	G1/2" x14	G5/8" x14	G3/4" x14	G1" x11	G1.1/4" x11	G1.1/2" x11	G2" x11
英锥管 螺纹	R1/8" x28	R1/4" x19	—	R3/8" x19	R1/2" x14	—	R3/4" x14	R1" x11	R1.1/4" x11	R1.1/2" x11	R2" x11
布锥管 螺纹	Z1/8" x27	Z1/4" x18	—	Z3/8" x18	Z1/2" x14	—	Z3/4" x14	Z1" x11.5	Z1.1/4" x11.5	Z1.1/2" x11.5	Z2" x11.5
美制 JIC 螺纹	—	7/16" x20	1/2" x20	9/16" x18	3/4" x16	7/8" x14	1.1/16" x12	1.5/16" x12	1.5/8" x12	1.7/8" x12	2.1/2" x12
美制 ORFS 螺纹	—	9/16" x18	—	11/16" x16	13/16" x16	1" x14	1.3/16" x12	1.7/16" x12	1.11/16" x12	2" x12	—
美制 SAE 螺纹	—	—	—	5/8" x18	—	—	1.1/16" x14	—	—	—	—
法兰	—	—	—	—	1/2"	5/8"	3/4"	1"	1.1/4"	1.1/2"	2"
标号	02	04	05	06	08	10	12	16	20	24	32

标注示例:

1BG 直通过渡接头系列,左端接头螺纹为 G1/2" X14,右端接头螺纹为 G3/4" X14,用碳钢制作的接头,代号为 1BG-08-12,如用不锈钢制作,代号为 1BG-08-12SS。

AJJN 三通过渡接头系列,左端接头螺纹为 9/16" x18,中端接头螺纹为 9/16" x18,右端接头螺纹为 Z1/2" x14,用碳钢制作的接头,代号为 AJJN-06-06-08。

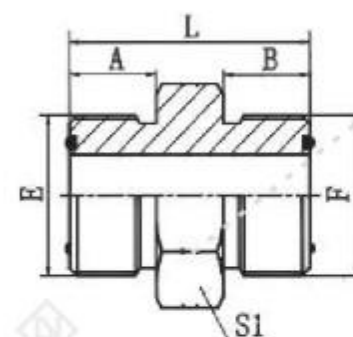


1E

公制外螺纹O形圈平面密封
METRIC MALE O-RING

代号 PART NO.	螺纹 THREAD	O形圈 O-RING	尺寸 DIMENSIONS			
	E、F端	E、F端	A	B	L	S1
1E-12	M12X1.25	O05.3X1.8 N90	11	11	28	14
1E-14	M14X1.5	O07.5X1.8 N90	11	11	28	17
1E-16	M16X1.5	O08.5X1.8 N90	11	11	28	17
1E-18	M18X1.5	O09.75X1.8 N90	11	11	28	19
1E-22	M22X1.5	O13.2X1.8 N90	12	12	32	24
1E-30	M30X1.5	O19.0X1.8 N90	14	14	39	32
1E-36	M36X2	O23.6X1.8 N90	16	16	43	38
1E-39	M39X2	O26.5X1.8 N90	18	18	49	41
1E-42	M42X2	O29.0X1.8 N90	20	20	53	46
1E-45	M45X2	O31.5X1.8 N90	21	21	55	46
1E-52	M52X2	O37.5X1.8 N90	22	22	59	55
1E-60	M60X2	O42.5X2.65 N90	24	24	65	65
1E-64	M64X2	O46.2X2.65 N90	27	27	71	70

注: O形圈参数为外径与线径。

Note: The parameter of O-Ring is ring outside diameter and ring width.

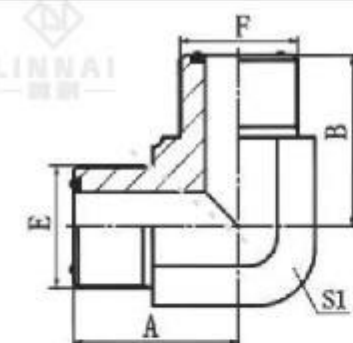


1E9

90° 公制外螺纹O形圈平面密封
90° METRIC MALE O-RING

代号 PART NO.	螺纹 THREAD	O形圈 O-RING	尺寸 DIMENSIONS		
	E、F	E、F端	A	B	S1
1E9-12	M12X1.25	O05.3X1.8 N90	20.5	20.5	12
1E9-14	M14X1.5	O07.5X1.8 N90	22.5	22.5	14
1E9-16	M16X1.5	O08.5X1.8 N90	24	24	17
1E9-18	M18X1.5	O09.75X1.8 N90	26	26	19
1E9-22	M22X1.5	O13.2X1.8 N90	29	29	22
1E9-30	M30X1.5	O19.0X1.8 N90	35.5	35.5	30
1E9-36	M36X2	O23.6X1.8 N90	42	42	36
1E9-39	M39X2	O26.5X1.8 N90	47.5	47.5	41
1E9-42	M42X2	O29.0X1.8 N90	49.5	49.5	41
1E9-45	M45X2	O31.5X1.8 N90	52.5	52.5	46
1E9-52	M52X2	O37.5X1.8 N90	57	57	50

注: O形圈参数为外径与线径。

Note: The parameter of O-Ring is ring outside diameter and ring width.

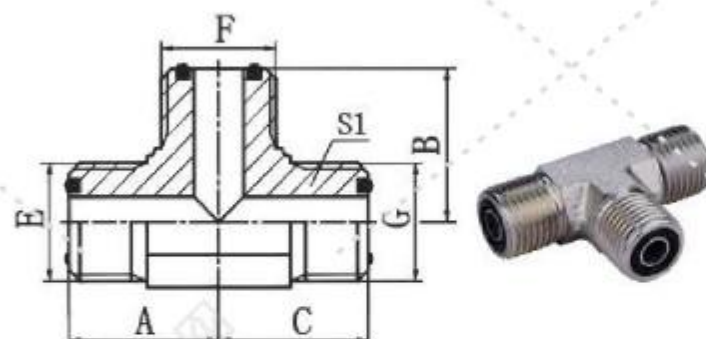


AE

公制外螺纹O形圈平面密封三通接头
METRIC MALE O-RING TEE

代号 PART NO.	螺纹 THREAD E、F、G	O形圈 O-RING E、F、G端	尺寸 DIMENSIONS			
			A	B	C	S1
AE-14	M14X1.5	O07.5X1.8 N90	22.5	22.5	22.5	14
AE-16	M16X1.5	O08.5X1.8 N90	24	24	24	17
AE-18	M18X1.5	O09.75X1.8 N90	26	26	26	19
AE-22	M22X1.5	O13.2X1.8 N90	29	29	29	22
AE-27	M27X1.5	O17.0X1.8 N90	32.5	32.5	32.5	27
AE-30	M30X1.5	O19.0X1.8 N90	35.5	35.5	35.5	30
AE-39	M39X2	O26.5X1.8 N90	47.5	47.5	47.5	41
AE-42	M42X2	O29.0X1.8 N90	49.5	49.5	49.5	41
AE-45	M45X2	O31.5X1.8 N90	52.5	52.5	52.5	46
AE-52	M52X2	O37.5X1.8 N90	57	57	57	50

注：O形圈参数为外径与线径。

Note: The parameter of O-Ring is ring outside diameter and ring width.

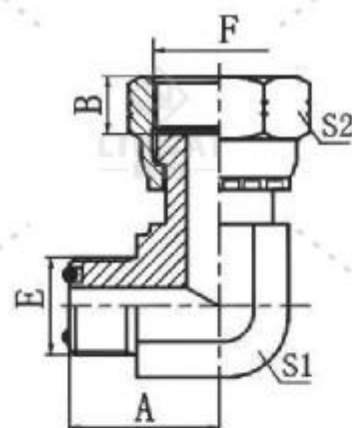


2E9

90° 弯公制螺纹O形圈平面密封
90° ELBOW METRIC O-RING

代号 PART NO.	螺纹 THREAD E、F	O形圈 O-RING E端	尺寸 DIMENSIONS			
			A	B	S1	S2
2E9-12	M12X1.25	O05.3X1.8 N90	20.5	8	12	17
2E9-14	M14X1.5	O07.5X1.8 N90	22.5	8.5	14	19
2E9-16	M16X1.5	O08.5X1.8 N90	24	8.5	17	22
2E9-18	M18X1.5	O09.75X1.8 N90	26	8.5	19	24
2E9-22	M22X1.5	O13.2X1.8 N90	29	10	22	27
2E9-30	M30X1.5	O19.0X1.8 N90	35.5	11	30	36
2E9-36	M36X2	O23.6X1.8 N90	42	13	36	41
2E9-39	M39X2	O26.5X1.8 N90	47.5	13	41	46
2E9-42	M42X2	O29.0X1.8 N90	49.5	15	41	50
2E9-45	M45X2	O31.5X1.8 N90	52.5	15	46	55
2E9-52	M52X2	O37.5X1.8 N90	56	17	50	60

注：O形圈参数为外径与线径。

Note: The parameter of O-ring is ring outside diameter and ring width.

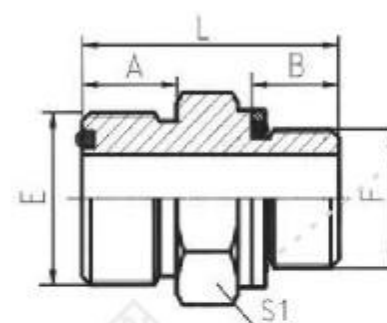

1EH


公制外螺纹O形圈平面密封/
公制外螺纹ISO 6149-2

METRIC MALE O-RING/
METIRC MALE ISO 6149-2

代号 PART NO.	螺纹 THREAD E、F	O形圈 O-RING E端、F端	尺寸 DIMENSIONS			
			A	B	L	S1
1EH-12-10	M12X1.25	M10X1 O05.3X1.8 N90 O08.1X1.6 N90	11	8.5	26.5	14
1EH-14-12	M14X1.5	M12X1.5 O07.5X1.8 N90 O09.3X2.4 N90	11	11	28	17
1EH-16-14	M16X1.5	M14X1.5 O08.5X1.8 N90 O11.3X2.4 N90	11	11	28	19
1EH-18-16	M18X1.5	M16X1.5 O09.75X1.8 N90 O13.3X2.4 N90	11	11.5	31.5	22
1EH-22-18	M22X1.5	M18X1.5 O13.2X1.8 N90 O15.3X2.4 N90	12	12.5	34.5	24
1EH-30-27	M30X1.5	M27X2 O19.0X1.8 N90 O23.5X3.0 N90	14	18.5	43.5	32
1EH-36-33	M36X2	M33X2 O23.6X1.8 N90 O29.2X3.0 N90	16	18.5	47.5	41
1EH-39-33	M39X2	M33X2 O26.5X1.8 N90 O29.2X3.0 N90	18	18.5	49.5	41
1EH-42	M42X2	M42X2 O29.0X1.8 N90 O38.5X3.0 N90	20	19	54	50
1EH-45-42	M45X2	M42X2 O31.5X1.8 N90 O38.5X3.0 N90	21	19	54	50
1EH-52-48	M52X2	M48X2 O37.5X1.8 N90 O44.5X3.0 N90	22	21.5	58.5	55

注：1 E端O形圈参数为外径与线径。 2 F端与ISO6149-1油口相配。

Note: 1 The parameters of E end O-Ring are ring outside diameter and ring width. 2 F end is fit for ISO 61491-1 port

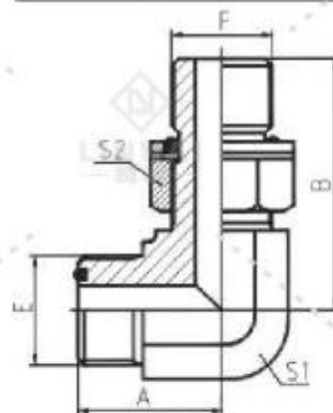

1EH9-OG


90° 公制外螺纹O形圈平面密封/
公制外螺纹可调向柱端重系列ISO 6149-2

90° ELBOW METRIC MALE O-RING/METIRC MALE
ADJUSTABLE STUDEND S-SERIES ISO 6149-2

代号 PART NO.	螺纹 THREAD E、F	O形圈 O-RING E端、F端	尺寸 DIMENSIONS			
			A	B	S1	S2
1EH9-12-10OG	M12X1.25	M10X1 O05.3X1.8 N90 O08.1X1.6 N90	20.5	28.5	12	14
1EH9-14-12OG	M14X1.5	M12X1.5 O07.5X1.8 N90 O09.3X2.4 N90	22.5	33.2	14	17
1EH9-16-14OG	M16X1.5	M14X1.5 O08.5X1.8 N90 O11.3X2.4 N90	24	36	17	19
1EH9-18-16OG	M18X1.5	M16X1.5 O09.75X1.8 N90 O13.3X2.4 N90	26	39	19	22
1EH9-22-18OG	M22X1.5	M18X1.5 O13.2X1.8 N90 O15.3X2.4 N90	29	44	22	24
1EH9-30-27OG	M30X1.5	M27X2 O19.0X1.8 N90 O23.5X3.0 N90	35.5	57	30	32
1EH9-36-33OG	M36X2	M33X2 O23.6X1.8 N90 O29.2X3.0 N90	42	60.5	36	41
1EH9-39-33OG	M39X2	M33X2 O26.5X1.8 N90 O29.2X3.0 N90	47.5	64	41	41
1EH9-42-42OG	M42X2	M42X2 O29.0X1.8 N90 O38.5X3.0 N90	49.5	65	41	50
1EH9-45-42OG	M45X2	M42X2 O31.5X1.8 N90 O38.5X3.0 N90	52.5	67.5	46	50
1EH9-52-48OG	M52X2	M48X2 O37.5X1.8 N90 O44.5X3.0 N90	57	73.5	50	55

注：1 E端O形圈参数为外径与线径。 2 F端与ISO6149-1油口相配。

Note: 1 The parameters of E end O-Ring are ring outside diameter and ring width. 2 F end is fit for ISO 61491-1 port




1EL

公制外螺纹O形圈平面密封/公制外螺纹组合垫圈
METRIC MALE O-RING/
METRIC MALE WITH BONDED SEAL

代号 PART NO.	螺纹 THREAD		密封圈 SEAL		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	L	S1
1EL-14	M14X1.5	M14X1.5	O07.5X1.8 N90	ZHD-14	11	12	30.5	19
1EL-14-16	M14X1.5	M16X1.5	O07.5X1.8 N90	ZHD-16	11	12	31	22
1EL-14-18	M14X1.5	M18X1.5	O07.5X1.8 N90	ZHD-18	11	12	32.5	24
1EL-14-22	M14X1.5	M22X1.5	O07.5X1.8 N90	ZHD-22	11	14	36.5	27
1EL-16-14	M16X1.5	M14X1.5	O08.5X1.8 N90	ZHD-14	11	12	29	19
1EL-16-18	M16X1.5	M18X1.5	O08.5X1.8 N90	ZHD-18	11	12	31	24
1EL-16-22	M16X1.5	M22X1.5	O08.5X1.8 N90	ZHD-22	13	14	38.5	30
1EL-16-27	M16X1.5	M27X1.5	O08.5X1.8 N90	ZHD-27	13	18	44	41
1EL-18-14	M18X1.5	M14X1.5	O09.0X1.8 N90	ZHD-14	14	12	38.5	32
1EL-18-18	M18X1.5	M18X1.5	O09.0X1.8 N90	ZHD-18	14	16	41	34
1EL-18-22	M18X1.5	M22X1.5	O09.0X1.8 N90	ZHD-22	14	16	41	34
1EL-18-27	M18X1.5	M27X1.5	O09.0X1.8 N90	ZHD-27	14	16	41	34
1EL-18-33	M18X1.5	M33X2	O09.0X1.8 N90	ZHD-33	16	18	49	41
1EL-20-14	M20X1.5	M14X1.5	O10.0X1.8 N90	ZHD-14	16	18	49	41
1EL-20-18	M20X1.5	M18X1.5	O10.0X1.8 N90	ZHD-18	16	18	49	41
1EL-20-22	M20X1.5	M22X1.5	O10.0X1.8 N90	ZHD-22	16	18	49	41
1EL-20-27	M20X1.5	M27X1.5	O10.0X1.8 N90	ZHD-27	16	18	49	41
1EL-20-33	M20X1.5	M33X2	O10.0X1.8 N90	ZHD-33	16	18	49	41
1EL-22-14	M22X1.5	M14X1.5	O10.5X1.8 N90	ZHD-14	21	20	56	50
1EL-22-18	M22X1.5	M18X1.5	O10.5X1.8 N90	ZHD-18	21	20	56	50
1EL-22-22	M22X1.5	M22X1.5	O10.5X1.8 N90	ZHD-22	21	20	56	50
1EL-22-27	M22X1.5	M27X1.5	O10.5X1.8 N90	ZHD-27	21	20	56	50
1EL-22-33	M22X1.5	M33X2	O10.5X1.8 N90	ZHD-33	22	22	61	60

注：E端O形圈参数为外径与线径，F端组合垫尺寸见附表。

Note: The parameter of E end O-Ring is ring outside diameter and ring width.




1ET-SP

公制外螺纹O形圈平面密封/英锥管外螺纹
METRIC MALE O-RING/BSPT MALE

代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1ET-14-04SP	M14X1.5	R1/4"X19	O07.5X1.8 N90	11	14.5	31.5	14
1ET-14-06SP	M14X1.5	R3/8"X19	O07.5X1.8 N90	11	15	32	17
1ET-16-04SP	M16X1.5	R1/4"X19	O08.5X1.8 N90	11	14.5	31.5	17
1ET-16-06SP	M16X1.5	R3/8"X19	O08.5X1.8 N90	11	15	32	17
1ET-18-06SP	M18X1.5	R3/8"X19	O09.0X1.8 N90	11	15	32	19
1ET-22-08SP	M22X1.5	R1/2"X14	O13.2X1.8 N90	12	20	40	24
1ET-22-12SP	M22X1.5	R3/4"X14	O13.2X1.8 N90	12	20	40	27
1ET-27-08SP	M27X1.5	R1/2"X14	O17.0X1.8 N90	13	20	43	30
1ET-27-12SP	M27X1.5	R3/4"X14	O17.0X1.8 N90	13	20	43	30
1ET-30-12SP	M30X1.5	R3/4"X14	O19.0X1.8 N90	14	20	45	32
1ET-36-12SP	M36X2	R3/4"X14	O23.6X1.8 N90	16	20	47	38
1ET-36-16SP	M36X2	R1"X11	O23.6X1.8 N90	16	25.5	52.5	38
1ET-39-16SP	M39X2	R1"X11	O26.5X1.8 N90	18	25.5	56.5	41
1ET-39-20SP	M39X2	R1.1/4"X11	O26.5X1.8 N90	18	26.5	57.5	46
1ET-42-20SP	M42X2	R1.1/4"X11	O29.0X1.8 N90	20	26.5	59.5	46
1ET-45-20SP	M45X2	R1.1/4"X11	O31.5X1.8 N90	21	26.5	60.5	46
1ET-52-24SP	M52X2	R1.1/2"X11	O37.5X1.8 N90	22	26.5	63.5	55


注：E端O形圈参数为外径与线径。

Note: The parameter of E end O-Ring is ring outside diameter and ring width.

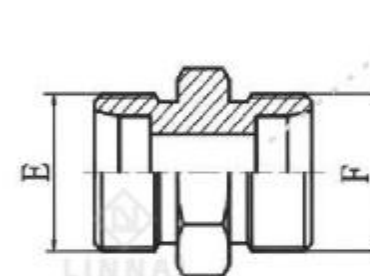

1C

1D

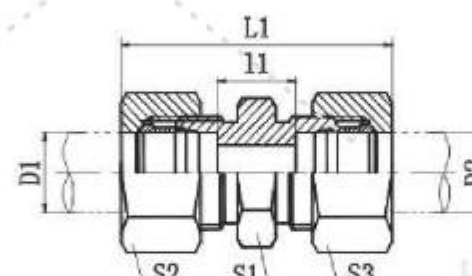

1C-RN

1D-RN




直通接头
STRAIGHT SITTINGS

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.		尺寸 DIMENSIONS					压力等级 MPa
	E	F	D1	D2	L1	L11	S1	S2	S3	
1C-12	M12X1.5	M12X1.5	6	6	10	39	12	14	14	31.5 轻系列 L
1C-14	M14X1.5	M14X1.5	8	8	11	40	14	17	17	
1C-16	M16X1.5	M16X1.5	10	10	13	42	17	19	19	
1C-18	M18X1.5	M18X1.5	12	12	14	43	19	22	22	
1C-22	M22X1.5	M22X1.5	15	15	16	46	24	27	27	
1C-26	M26X1.5	M26X1.5	18	18	16	48	27	32	32	16 轻系列 L
1C-30	M30X2	M30X2	22	22	20	52	32	36	36	
1C-36	M36X2	M36X2	28	28	21	54	41	41	41	
1C-45	M45X2	M45X2	35	35	20	63	46	50	50	
1C-52	M52X2	M52X2	42	42	21	66	55	60	60	
1D-14	M14X1.5	M14X1.5	6	6	16	45	14	17	17	63 重系列 S
1D-16	M16X1.5	M16X1.5	8	8	18	47	17	19	19	
1D-18	M18X1.5	M18X1.5	10	10	17	49	19	22	22	
1D-20	M20X1.5	M20X1.5	12	12	19	51	22	24	24	
1D-22	M22X1.5	M22X1.5	14	14	22	57	24	27	27	
1D-24	M24X1.5	M24X1.5	16	16	21	57	27	30	30	40 重系列 S
1D-30	M30X2	M30X2	20	20	23	66	32	36	36	
1D-36	M36X2	M36X2	25	25	26	74	41	46	46	
1D-42	M42X2	M42X2	30	30	27	80	46	50	50	
1D-52	M52X2	M52X2	38	38	29	90	55	60	60	


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1C-30RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1C-30RN.



1C

1D

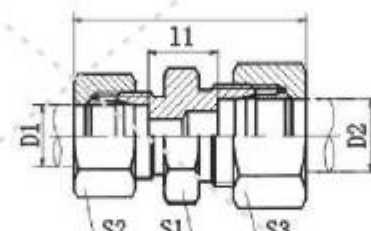

1C-RN

1D-RN




直通变径接头

STRAIGHT REDUCERS


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS							压力等级 MPa
	E	F	D1	D2	L1	L2	S1	S2	S3	
1C-12-14	M12X1.5	M14X1.5	6	8	40	11	14	14	17	轻系列 L
1C-12-16	M12X1.5	M16X1.5	6	10	41	12	17	14	19	
1C-12-18	M12X1.5	M18X1.5	6	12	42	13	19	14	22	
1C-14-18	M14X1.5	M18X1.5	8	12	42	13	19	17	22	
1C-16-18	M16X1.5	M18X1.5	10	12	43	14	19	19	22	
1C-16-22	M16X1.5	M22X1.5	10	15	44.5	15	24	19	27	
1C-16-26	M16X1.5	M26X1.5	10	18	46	15.5	27	19	32	
1C-18-22	M18X1.5	M22X1.5	12	15	44.5	15	24	22	27	
1C-18-26	M18X1.5	M26X1.5	12	18	46	15.5	27	22	32	
1C-18-30	M18X1.5	M30X2	12	22	48	17.5	32	22	36	
1C-22-26	M22X1.5	M26X1.5	15	18	47.5	16.5	27	27	32	16 轻系列 L
1C-22-30	M22X1.5	M30X2	15	22	49.5	18.5	32	27	36	
1C-26-30	M26X1.5	M30X2	18	22	50	18	32	32	36	
1C-26-36	M26X1.5	M36X2	18	28	51.5	19	41	32	41	
1C-30-36	M30X2	M36X2	22	28	53.5	21	38	36	41	
1C-30-45	M30X2	M45X2	22	35	58.5	21	46	36	50	
1C-36-45	M36X2	M45X2	28	35	59	21	46	41	50	
1D-14-16	M14X1.5	M16X1.5	6	8	47	18	17	17	19	63 重系列 S
1D-14-18	M14X1.5	M18X1.5	6	10	48	17.5	19	17	22	
1D-14-20	M14X1.5	M20X1.5	6	12	50	19.5	22	17	24	
1D-16-18	M16X1.5	M18X1.5	8	10	48	17.5	19	19	22	
1D-16-20	M16X1.5	M20X1.5	8	12	50	19.5	22	19	24	
1D-18-20	M18X1.5	M20X1.5	10	12	51	19	22	22	24	
1D-18-22	M18X1.5	M22X1.5	10	14	54	20.5	24	22	27	
1D-18-30	M18X1.5	M30X2	10	20	59.5	22	32	22	36	40 重系列 S
1D-20-22	M20X1.5	M22X1.5	12	14	54	20.5	24	24	27	
1D-20-24	M20X1.5	M24X1.5	12	16	54	20	27	24	30	
1D-20-30	M20X1.5	M30X2	12	20	59.5	22	32	24	36	
1D-22-24	M22X1.5	M24X1.5	14	16	57	21.5	27	27	30	
1D-24-30	M24X1.5	M30X2	16	20	62.5	23	32	30	36	
1D-24-36	M24X1.5	M36X2	16	25	67.5	25.5	41	30	46	
1D-30-36	M30X2	M36X2	20	25	71	25.5	41	36	46	
1D-30-42	M30X2	M42X2	20	30	74	26	46	36	50	
1D-36-42	M36X2	M42X2	25	30	77	26.5	46	46	50	
1D-42-52	M42X2	M52X2	30	38	86.5	29.5	55	50	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1C-30-36RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1C-30-36RN.



1C9

1D9

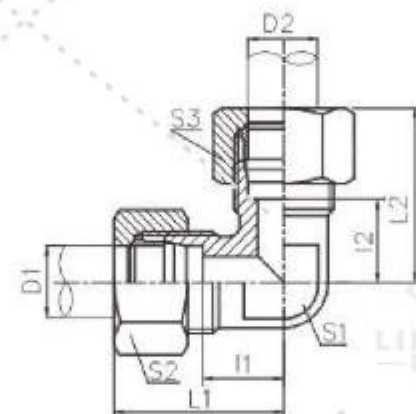

1C9-RN

1D9-RN




90° 弯曲接头

90° ELBOW FITTINGS


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS							压力等级 MPa
	E	F	D1	D2	L1,L2	S1	S2,S3			
1C9-12	M12X1.5	M12X1.5	6	6	12	27	12	14	31.5 轻系列 L	
1C9-14	M14X1.5	M14X1.5	8	8	14	29	12	17		
1C9-16	M16X1.5	M16X1.5	10	10	15	30	14	19		
1C9-18	M18X1.5	M18X1.5	12	12	17	32	17	22		
1C9-22	M22X1.5	M22X1.5	15	15	21	36	19	27		
1C9-26	M26X1.5	M26X1.5	18	18	23.5	40	24	32		
1C9-30	M30X2	M30X2	22	22	27.5	44	27	36	16 轻系列 L	
1C9-36	M36X2	M36X2	28	28	30.5	47	36	41		
1C9-45	M45X2	M45X2	35	35	34.5	56	41	50		
1C9-52	M52X2	M52X2	42	42	40	63	50	60		
1D9-14	M14X1.5	M14X1.5	6	6	16	31	12	17	63 重系列 S	
1D9-16	M16X1.5	M16X1.5	8	8	17	32	14	19		
1D9-18	M18X1.5	M18X1.5	10	10	17.5	34	17	22		
1D9-20	M20X1.5	M20X1.5	12	12	21.5	38	17	24		
1D9-22	M22X1.5	M22X1.5	14	14	22	40	19	27		
1D9-24	M24X1.5	M24X1.5	16	16	24.5	43	24	30	40 重系列 S	
1D9-30	M30X2	M30X2	20	20	26.5	48	27	36		
1D9-36	M36X2	M36X2	25	25	30	54	36	46		
1D9-42	M42X2	M42X2	30	30	35.5	62	41	50		
1D9-52	M52X2	M52X2	38	38	41	72	50	60	31.5重系列S	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1C9-30RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1C9-30RN.



AC

AD

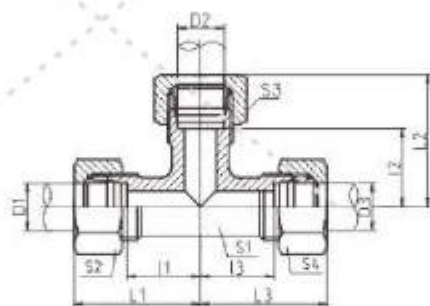

AC-RN

AD-RN




三通接头
EQUAL TEES


代号 PART NO.	螺纹 THREAD E, F, G	管子外径 TUBE O.D. D1, D2, D3	尺寸 DIMENSIONS I1, I2, I3, L1, L2, L3, S1, S2, S3, S4				压力等级 MPa
AC-12	M12X1.5	6	12	27	12	14	25 轻系列 L
AC-14	M14X1.5	8	14	29	12	17	
AC-16	M16X1.5	10	15	30	14	19	
AC-18	M18X1.5	12	17	32	17	22	
AC-22	M22X1.5	15	21	36	19	27	
AC-26	M26X1.5	18	23.5	40	24	32	
AC-30	M30X2	22	27.5	44	27	36	16 轻系列 L
AC-36	M36X2	28	30.5	47	36	41	
AC-45	M45X2	35	34.5	56	41	50	
AC-52	M52X2	42	40	63	50	60	
AD-14	M14X1.5	6	16	31	12	17	63 重系列 S
AD-16	M16X1.5	8	17	32	14	19	
AD-18	M18X1.5	10	17.5	34	17	22	
AD-20	M20X1.5	12	21.5	38	17	24	
AD-22	M22X1.5	14	22	40	19	27	
AD-24	M24X1.5	16	24.5	43	24	30	40 重系列 S
AD-30	M30X2	20	26.5	48	27	36	
AD-36	M36X2	25	30	54	36	46	
AD-42	M42X2	30	35.5	62	41	50	
AD-52	M52X2	38	41	72	50	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如AC-22RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example AC-22RN.

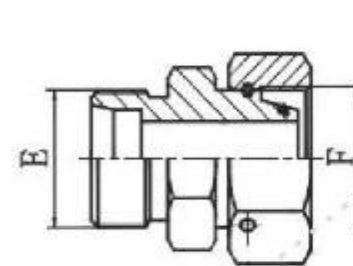

2C

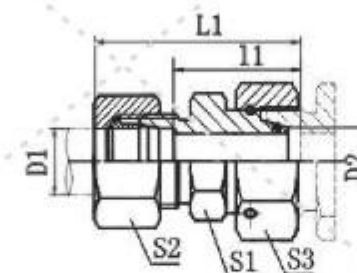

2C-RN




外螺纹内螺纹转换接头
REDUCER TUBE ADAPTOR
WITH SWIVEL NUT

代号 PART NO.	螺纹 THREAD E, F	管子外径 TUBE O.D. D1, D2	尺寸 DIMENSIONS I1, L1, S1, S2, S3					压力等级 MPa
2C-12-14	M12X1.5 M14X1.5	6 8	23.5	38	12	14	17	31.5 轻系列 L
2C-12-16	M12X1.5 M16X1.5	6 10	25	40	14	14	19	
2C-14-16	M14X1.5 M16X1.5	8 10	25	40	14	17	19	
2C-16-18	M16X1.5 M18X1.5	10 12	26	41	17	19	22	
2C-14-22	M14X1.5 M22X1.5	8 15	28.5	43	19	17	27	
2C-16-22	M16X1.5 M22X1.5	10 15	29.5	44	19	19	27	
2C-18-22	M18X1.5 M22X1.5	12 15	29.5	44	19	22	27	
2C-16-26	M16X1.5 M26X1.5	10 18	29	44	24	19	32	
2C-18-26	M18X1.5 M26X1.5	12 18	29	44	24	22	32	
2C-22-26	M22X1.5 M26X1.5	15 18	30	45	24	27	32	
2C-18-30	M18X1.5 M30X2	12 22	33	48	27	22	36	16 轻系列 L
2C-22-30	M22X1.5 M30X2	15 22	34	49	27	27	36	
2C-26-30	M26X1.5 M30X2	18 22	33.5	50	27	32	36	
2C-22-36	M22X1.5 M36X2	15 28	36	51	36	27	41	
2C-26-36	M26X1.5 M36X2	18 28	35.5	52	36	32	41	
2C-30-36	M30X2 M36X2	22 28	37.5	54	36	36	41	
2C-26-45	M26X1.5 M45X2	18 35	38.5	55	41	32	50	
2C-30-45	M30X2 M45X2	22 35	40.5	57	41	36	50	
2C-36-45	M36X2 M45X2	28 35	40.5	57	41	41	50	
2C-26-52	M26X1.5 M52X2	18 42	42	58	50	32	60	
2C-30-52	M30X2 M52X2	22 42	44	60	50	36	60	
2C-36-52	M36X2 M52X2	28 42	44	61	50	41	60	
2C-45-52	M45X2 M52X2	35 42	43	65	50	50	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如2C-30-52RN。


Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 2C-30-52RN.

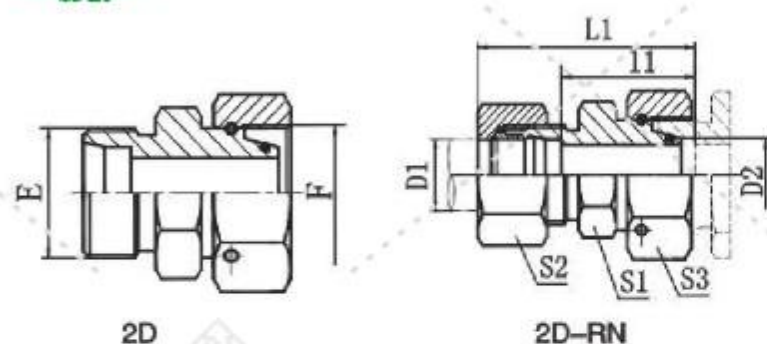

外螺纹内螺纹转换接头
REDUCER TUBE ADAPTOR
WITH SWIVEL NUT

代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS							压力等级 MPa
	E	F	D1	D2	I1	L1	S1	S2	S3	
2D-14-16	M14X1.5	M16X1.5	6	8	27	42	14	17	19	63 重系列 S
2D-14-18	M14X1.5	M18X1.5	6	10	27.5	42	17	17	22	
2D-14-20	M14X1.5	M20X1.5	6	12	29	44	17	17	24	
2D-16-20	M16X1.5	M20X1.5	8	12	29	44	17	19	24	
2D-16-22	M16X1.5	M22X1.5	8	14	31.5	46	19	19	27	
2D-18-20	M18X1.5	M20X1.5	10	12	31	46	19	22	24	
2D-18-22	M18X1.5	M22X1.5	10	14	31	47	19	22	27	
2D-20-22	M20X1.5	M22X1.5	12	14	31	47	22	24	27	
2D-16-24	M16X1.5	M24X1.5	8	16	32	47	22	19	30	40 重系列 S
2D-18-24	M18X1.5	M24X1.5	10	16	31.5	48	22	22	30	
2D-18-30	M18X1.5	M30X2	10	20	35.5	52	27	22	36	
2D-20-24	M20X1.5	M24X1.5	12	16	33.5	50	22	24	30	
2D-20-30	M20X1.5	M30X2	12	20	35.5	52	27	24	36	
2D-22-24	M22X1.5	M24X1.5	14	16	33	51	24	27	30	
2D-22-30	M22X1.5	M30X2	14	20	37	55	27	27	36	
2D-22-36	M22X1.5	M36X2	14	25	39.5	57	36	27	46	
2D-24-30	M24X1.5	M30X2	16	20	37.5	55	30	30	36	
2D-24-36	M24X1.5	M36X2	16	25	39	57	36	30	46	
2D-24-42	M24X1.5	M42X2	16	30	44.5	63	41	30	50	
2D-30-36	M30X2	M36X2	20	25	39	61	36	36	46	
2D-30-42	M30X2	M42X2	20	30	44.5	66	41	36	50	
2D-36-42	M36X2	M42X2	25	30	44	69	41	46	50	
2D-24-52	M24X1.5	M52X2	16	38	48	66	50	30	60	31.5 重系列 S
2D-30-52	M30X2	M52X2	20	38	48	70	50	36	60	
2D-36-52	M36X2	M52X2	25	38	48.5	73	50	46	60	
2D-42-52	M42X2	M52X2	30	38	49	76	50	50	60	


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如2D-30-52RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 2D-30-52RN.

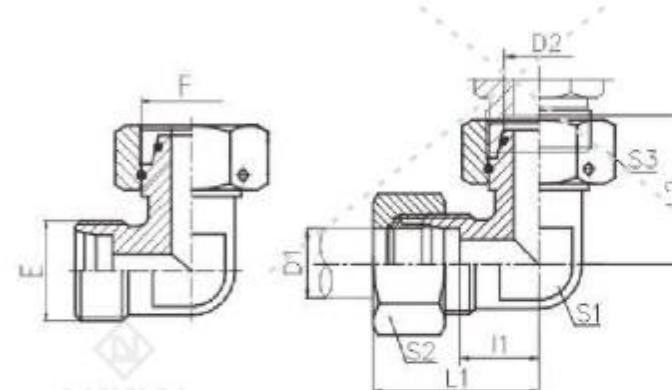

90° 弯外螺纹内螺纹转换接头
REDUCER TUBE ADAPTOR
WITH SWIVEL NUT 90° ELBOW

代 号	螺 纹 THREAD		管子外径 TUBE O.D.		尺 寸 DIMENSIONS						压力等级
PART NO.	E	F	D1	D2	I1	L1	L2	S1	S2	S3	MPa
2C9-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	25 轻系列 L
2C9-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	
2C9-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	
2C9-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	
2C9-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	
2C9-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	
2C9-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	16 轻系列L
2C9-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	
2C9-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	
2C9-52	M52X2	M52X2	42	42	40	63	56	50	60	60	
2D9-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	63 重系列 S
2D9-16	M16X1.5	M16X1.5	8	8	17	32	27.5	14	19	19	
2D9-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	
2D9-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	
2D9-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	
2D9-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	40 重系列 S
2D9-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	
2D9-36	M36X2	M36X2	25	25	30	54	50	36	46	46	
2D9-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	
2D9-52	M52X2	M52X2	38	38	41	72	63	50	60	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如2C9-30RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 2C9-30RN.

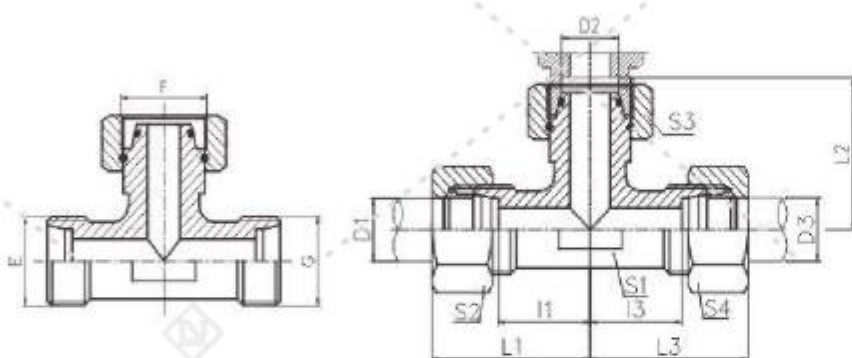

BC
BD

BC-RN
BD-RN


内螺纹分支三通接头
BRANCH TEE FITTINGS
WITH SWIVEL NUT



代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.		尺 寸 DIMENSIONS						压力等级 MPa
	E,G	F	D1,D3	D2	I1,I3	L1,L3	L2	S1	S2,S4	S3	
BC-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	31.5 轻系列 L
BC-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	
BC-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	
BC-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	
BC-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	
BC-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	
BC-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	16 轻系列L
BC-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	
BC-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	
BC-52	M52X2	M52X2	42	42	40	63	56	50	60	60	
BD-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	63 重系列 S
BD-16	M16X1.5	M16X1.5	8	8	17	32	27.5	14	19	19	
BD-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	
BD-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	
BD-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	
BD-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	40 重系列 S
BD-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	
BD-36	M36X2	M36X2	25	25	30	54	50	36	46	46	
BD-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	
BD-52	M52X2	M52X2	38	38	41	72	63	50	60	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如BC-30RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example BC-30RN.

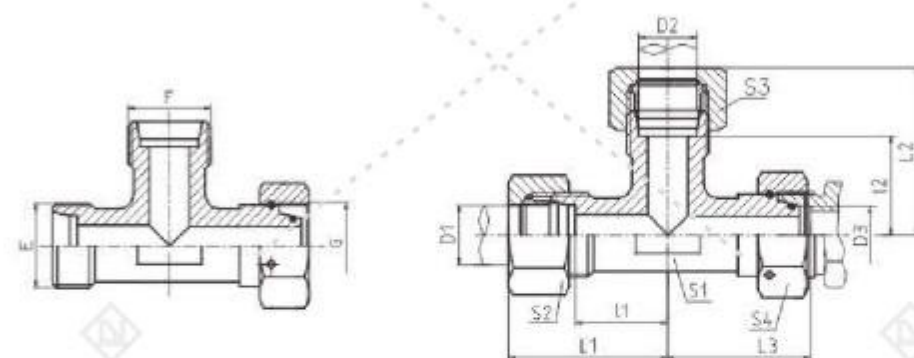

CC
CD

CC-RN
CD-RN


内螺纹主支三通接头
RUN TEE FITTINGS
WITH SWIVEL NUT



代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.		尺 寸 DIMENSIONS						压力等级 MPa
	E,F	G	D1,D2	D3	I1,I2	L1,L2	L3	S1	S2,S3	S4	
CC-12	M12X1.5	M12X1.5	6	6	12	27	26	12	14	14	31.5 轻系列 L
CC-14	M14X1.5	M14X1.5	8	8	14	29	27.5	12	17	17	
CC-16	M16X1.5	M16X1.5	10	10	15	30	29	14	19	19	
CC-18	M18X1.5	M18X1.5	12	12	17	32	29.5	17	22	22	
CC-22	M22X1.5	M22X1.5	15	15	21	36	32.5	19	27	27	
CC-26	M26X1.5	M26X1.5	18	18	23.5	40	35.5	24	32	32	
CC-30	M30X2	M30X2	22	22	27.5	44	38.5	27	36	36	16 轻系列L
CC-36	M36X2	M36X2	28	28	30.5	47	41.5	36	41	41	
CC-45	M45X2	M45X2	35	35	34.5	56	51	41	50	50	
CC-52	M52X2	M52X2	42	42	40	63	56	50	60	60	
CD-14	M14X1.5	M14X1.5	6	6	16	31	27	12	17	17	63 重系列 S
CD-16	M16X1.5	M16X1.5	8	8	17	32	27.8	14	19	19	
CD-18	M18X1.5	M18X1.5	10	10	17.5	34	30	17	22	22	
CD-20	M20X1.5	M20X1.5	12	12	21.5	38	31	17	24	24	
CD-22	M22X1.5	M22X1.5	14	14	22	40	35	19	27	27	
CD-24	M24X1.5	M24X1.5	16	16	24.5	43	36.5	24	30	30	40 重系列 S
CD-30	M30X2	M30X2	20	20	26.5	48	44.5	27	36	36	
CD-36	M36X2	M36X2	25	25	30	54	50	36	46	46	
CD-42	M42X2	M42X2	30	30	35.5	62	55	41	50	50	
CD-52	M52X2	M52X2	38	38	41	72	63	50	60	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如CC-30RN。


Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example CC-30RN.

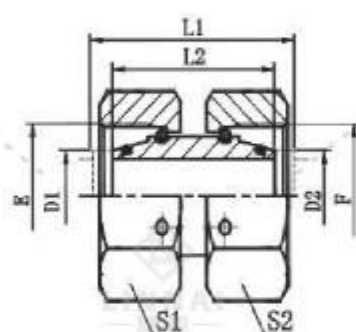


3C
3D

内螺纹直通接头
STRAIGHT TUBE ADAPTERS
WITH SWIVEL NUT

代号 PART NO.	螺 纹 THREAD	管子外径 TUBE O.D.	尺 寸 DIMENSIONS			压力等级 MPa
	E,F	D1,D2	L1	L2	S1,S2	
3C-12	M12X1.5	6	33	32	14	31.5 轻系列 L
3C-14	M14X1.5	8	33	32	17	
3C-16	M16X1.5	10	34	33	19	
3C-18	M18X1.5	12	34	33	22	
3C-22	M22X1.5	15	39	38	27	
3C-26	M26X1.5	18	41	39	32	
3C-30	M30X2	22	44	42	36	16 轻系列 L
3C-36	M36X2	28	48	46	46	
3C-45	M45X2	35	52	48	50	
3C-52	M52X2	42	57	52	60	
3D-14	M14X1.5	6	33	32	17	63 重系列 S
3D-16	M16X1.5	8	34	33	19	
3D-18	M18X1.5	10	35	33	22	
3D-20	M20X1.5	12	38	36	24	
3D-22	M22X1.5	14	41	39	27	
3D-24	M24X1.5	16	42	39	30	40 重系列 S
3D-30	M30X2	20	48	44	36	
3D-36	M36X2	25	53	46	46	
3D-42	M42X2	30	62	52	50	
3D-52	M52X2	38	67	52	60	



4C
4D

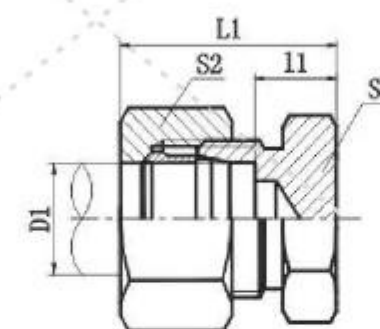

4C-RN
4D-RN




堵头
PLUG

代号 PART NO.	螺 纹 THREAD	管子外径 TUBE O.D.	尺 寸 DIMENSIONS				压力等级 MPa
	E	D1	I1	L1	S1	S2	
4C-12	M12X1.5	6	7	22	12	14	31.5 轻系列
4C-14	M14X1.5	8	8	23	14	17	
4C-16	M16X1.5	10	9	24	17	19	
4C-18	M18X1.5	12	10	25	19	22	
4C-22	M22X1.5	15	11	26	24	27	
4C-26	M26X1.5	18	11.5	28	27	32	
4C-30	M30X2	22	13.5	30	32	36	16 轻系列 L
4C-36	M36X2	28	14.5	31	41	41	
4C-45	M45X2	35	14.5	36	46	50	
4C-52	M52X2	42	16	39	55	60	
4D-14	M14X1.5	6	11	26	14	17	63 重系列 S
4D-16	M16X1.5	8	13	28	17	19	
4D-18	M18X1.5	10	12.5	29	19	22	
4D-20	M20X1.5	12	14.5	31	22	24	
4D-22	M22X1.5	14	16	34	24	27	
4D-24	M24X1.5	16	15.5	34	27	30	40 重系列 S
4D-30	M30X2	20	17.5	39	32	36	
4D-36	M36X2	25	20	44	38	46	
4D-42	M42X2	30	20.5	47	46	50	
4D-52	M52X2	38	23	54	55	60	


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如4C-30RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 4C-30RN.

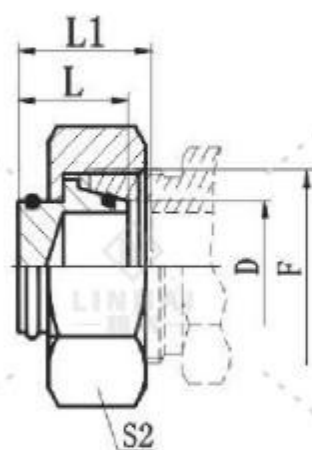


9C
9D
内螺纹堵头
FEMALE PLUG


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS			压力等级 MPa
	F	D	L	L1	S2	
9C-12	M12X1.5	6	15.5	17.5	14	31.5 轻系列 L
9C-14	M14X1.5	8	15.5	18	17	
9C-16	M16X1.5	10	16.5	18	19	
9C-18	M18X1.5	12	18	19.5	22	
9C-22	M22X1.5	15	19.5	20	27	
9C-26	M26X1.5	18	20	22	32	
9C-30	M30X2	22	21.5	22.5	36	16 轻系列 L
9C-36	M36X2	28	22.5	24.5	41	
9C-45	M45X2	35	25	29	55	
9C-52	M52X2	42	27	31.5	60	
9D-14	M14X1.5	6	16	18	17	63 重系列 S
9D-16	M16X1.5	8	16.5	18.5	19	
9D-18	M18X1.5	10	18	20	22	
9D-20	M20X1.5	12	18.5	20.5	24	
9D-22	M22X1.5	14	19	21.5	27	
9D-24	M24X1.5	16	18.5	21.5	30	40 重系列 S
9D-30	M30X2	20	22.5	25	36	
9D-36	M36X2	25	23.5	28.5	46	
9D-42	M42X2	30	25.5	32	50	
9D-52	M52X2	38	26.5	36	60	31.5重系列S




6C
6D



6C-LN
6D-LN

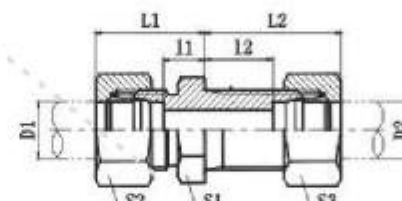

6C-RN
6D-RN



6C-LN/RN
6D-LN/RN




直通过板接头
STRAIGHT BULKHEAD FITTINGS

代 号	螺 纹 THREAD		管子外径 TUBE O.D.		尺 寸 DIMENSIONS							压力等级
PART NO.	E	F	D1	D2	I1	I2	L1	L2	S1	S2,S3	S4	MPa
6C-12	M12X1.5	M12X1.5	6	6	7	27	22	42	17	14	17	31.5 轻系列 L
6C-14	M14X1.5	M14X1.5	8	8	8	27	23	42	19	17	19	
6C-16	M16X1.5	M16X1.5	10	10	10	28	25	43	22	19	22	
6C-18	M18X1.5	M18X1.5	12	12	10	29	25	44	24	22	24	
6C-22	M22X1.5	M22X1.5	15	15	12	31	27	46	27	27	30	
6C-26	M26X1.5	M26X1.5	18	18	13.5	32.5	30	49	32	32	36	
6C-30	M30X2	M30X2	22	22	16.5	34.5	33	51	36	36	41	16 轻系列 L
6C-36	M36X2	M36X2	28	28	18.5	35.5	35	52	41	41	46	
6C-45	M45X2	M45X2	35	35	18.5	36.5	40	58	50	50	55	
6C-52	M52X2	M52X2	42	42	19	36	42	59	60	60	65	
6D-14	M14X1.5	M14X1.5	6	6	12	29	27	44	19	17	19	63 重系列 S
6D-16	M16X1.5	M16X1.5	8	8	13	29	28	44	22	19	22	
6D-18	M18X1.5	M18X1.5	10	10	14.5	29.5	31	46	24	22	24	
6D-20	M20X1.5	M20X1.5	12	12	14.5	30.5	31	47	27	24	27	
6D-22	M22X1.5	M22X1.5	14	14	17	32	35	50	30	27	30	
6D-24	M24X1.5	M24X1.5	16	16	16.5	31.5	35	50	32	30	32	40 重系列 S
6D-30	M30X2	M30X2	20	20	17.5	33.5	39	55	41	36	41	
6D-36	M36X2	M36X2	25	25	20	35	44	59	46	46	46	
6D-42	M42X2	M42X2	30	30	21.5	37.5	48	64	50	50	50	
6D-52	M52X2	M52X2	38	38	22	37	53	68	65	60	65	

注：如需带锁母订货，则请在代号后加“LN”，如6C-30LN；如需带卡套及卡套螺母订货，在代号后加“RN”，如6C-30RN；如需带锁母、卡套及卡套螺母订货，在代号后加“LN/RN”，如6C-30LN/RN。

Note: In case if you are interested to order the adapter with lock nut, please insert suffix "LN" after our part no., for example 6C-30LN, order the adapter with cutting ring and nut, insert suffix "RN" after part no., for example 6C-30RN, order the adapter with lock nut and cutting ring and nut, insert suffix "LN/RN" after part no., for example 6C-30LN/RN.

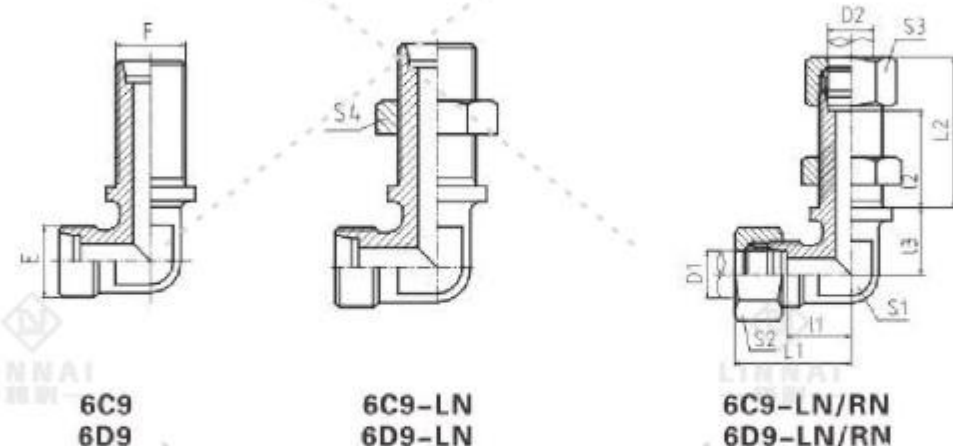


90° 弯曲过板接头
90° ELBOW BULKHEAD FITTINGS

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS									压力等级 MPa
	E	F		D1	D2	I1	I2	I3	L1	L2	S1	S2,S3	S4
6C9-12	M12X1.5	M12X1.5	6	6	27	12	14	42	27	12	14	17	31.5 轻系列 L
6C9-14	M14X1.5	M14X1.5	8	8	27	14	17	42	29	12	17	19	
6C9-16	M16X1.5	M16X1.5	10	10	28	15	18	43	30	14	19	22	
6C9-18	M18X1.5	M18X1.5	12	12	29	17	20	44	32	17	22	24	
6C9-22	M22X1.5	M22X1.5	15	15	31	21	23	46	36	19	27	30	
6C9-26	M26X1.5	M26X1.5	18	18	32.5	23.5	24	49	40	24	32	36	
6C9-30	M30X2	M30X2	22	22	34.5	27.5	30	51	44	27	36	41	16 轻系列 L
6C9-36	M36X2	M36X2	28	28	35.5	30.5	34	52	47	36	41	46	
6C9-45	M45X2	M45X2	35	35	36.5	34.5	39	58	56	41	50	55	
6C9-52	M52X2	M52X2	42	42	36	40	43	59	63	50	60	65	
6D9-14	M14X1.5	M14X1.5	6	6	29	16	17	44	31	12	17	19	63 重系列 S
6D9-16	M16X1.5	M16X1.5	8	8	29	17	18	44	32	14	19	22	
6D9-18	M18X1.5	M18X1.5	10	10	29.5	17.5	20	46	34	17	22	24	
6D9-20	M20X1.5	M20X1.5	12	12	30.5	21.5	21	47	38	17	24	27	
6D9-22	M22X1.5	M22X1.5	14	14	32	22	23	50	40	19	27	30	
6D9-24	M24X1.5	M24X1.5	16	16	31.5	24.5	24	50	43	24	30	32	
6D9-30	M30X2	M30X2	20	20	33.5	26.5	30	55	48	27	36	41	40 重系列 S
6D9-36	M36X2	M36X2	25	25	35	30	34	59	54	36	46	46	
6D9-42	M42X2	M42X2	30	30	37.5	35.5	39	64	62	41	50	50	
6D9-52	M52X2	M52X2	38	38	37	41	43	68	72	50	60	65	

注：如需带锁母订货，则请在代号后加“LN”，如6C9-30LN；如需带卡套及卡套螺母订货，在代号后加“RN”，如6C9-30RN；如需带锁母、卡套及卡套螺母订货，在代号后加“LN/RN”，如6C9-30LN/RN。


Note: In case if you are interested to order the adapter with lock nut, please insert suffix "LN" after our part no. for example 6C9-30LN, order the adapter with cutting ring and nut, insert suffix "RN" after part no., for example 6C9-30RN, order the adapter with lock nut and cutting ring and nut, insert suffix "LN/RN" after part no., for example 6C9-30LN/RN.

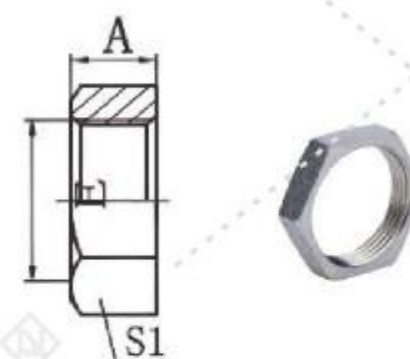

8C

公制螺纹锁母
METRIC LOCK NUT


代号 PART NO.	螺 纹 THREAD E	尺 寸 DIMENSIONS	
		A	S1
8C-10	M10X1	6	14
8C-12	M12X1.5	7.5	17
8C-14	M14X1.5	7.5	19
8C-16	M16X1.5	7.5	22
8C-18	M18X1.5	7.5	24
8C-22	M22X1.5	8	27
8C-24	M24X1.5	8	30
8C-26	M26X1.5	8	32
8C-27D	M27X1.5	10	32
8C-27	M27X2	10	32
8C-30	M30X2	10	36
8C-30D	M30X1.5	10	36
8C-33	M33X2	10	41
8C-36	M36X2	10	41
8C-39	M39X2	10	46
8C-42	M42X2	10	50
8C-45	M45X2	10	55
8C-52	M52X2	10	60



2WE

焊接管/公制内螺纹O形圈平面密封
BUTT-WELD TUBE/METRIC FEMALE O-RING


代号 PART NO.	螺 纹 THREAD E	管子直径 TUBE O.D.	尺 寸 DIMENSIONS		
			A	D	S2
2WE-06-12	M12X1.25	6	8	6	14
2WE-08-14	M14X1.5	8	8.5	8	17
2WE-10-16	M16X1.5	10	8.5	10	19
2WE-12-18	M18X1.5	12	8.5	12	22
2WE-14-22	M22X1.5	14	10	14	27
2WE-22-30	M30X1.5	22	11	22	36
2WE-28-36	M36X2	28	13	28	41
2WE-30-39	M39X2	30	13	30	46
2WE-34-42	M42X2	34	15	34	50
2WE-38-52	M45X2	38	15	38	55
2WE-42-52	M52X2	42	17	42	60
2WE-50-60	M30X2	50	20	50	70
2WE-52-64	M64X2	52	23	52	75

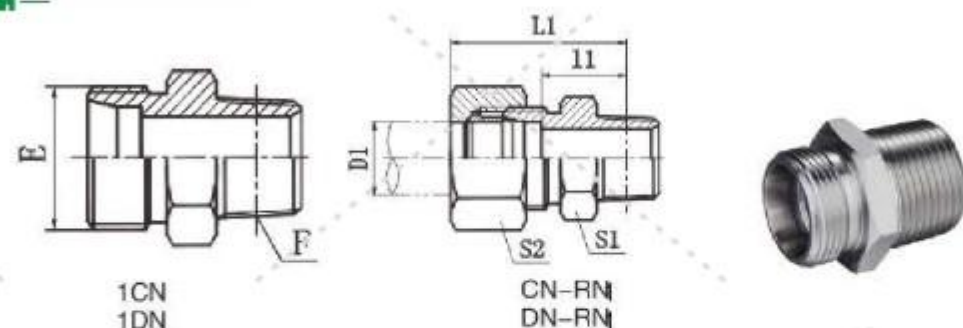

布锥管外螺纹
NPT MALE

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	尺寸 DIMENSIONS				压力等级 MPa
	E	F		I1	L1	S1	S2	
1CN-12-02	M12X1.5	Z1/8"X27	6	13.4	28.4	12	14	25 轻系列 L
1CN-12-04	M12X1.5	Z1/4"X18	6	17.2	32.2	17	14	
1CN-14-04	M14X1.5	Z1/4"X18	8	17.2	32.2	14	17	
1CN-16-06	M16X1.5	Z3/8"X18	10	19.9	53.0	19	19	
1CN-18-04	M18X1.5	Z1/4"X18	12	19.2	34.2	19	22	
1CN-18-06	M18X1.5	Z3/8"X18	12	19.9	34.9	19	22	
1CN-18-08	M18X1.5	Z1/2"X14	12	21.4	36.4	22	22	
1CN-22-08	M22X1.5	Z1/2"X14	15	22.4	37.4	24	27	
1CN-22-20	M22X1.5	Z1.1/4"X11.5	15	29.8	37.4	46	27	16 轻系列 L
1CN-26-08	M26X1.5	Z1/2"X14	18	22.9	39.4	27	32	
1CN-26-12	M26X1.5	Z3/4"X14	18	22.4	38.9	30	32	
1CN-30-08	M30X2	Z1/2"X14	22	24.4	40.5	32	36	
1CN-30-12	M30X2	Z3/4"X14	22	24.4	40.9	32	36	
1CN-36-16	M36X2	Z1"X11.5	28	29.8	46.3	41	41	
1CN-36-20	M36X2	Z1.1/4"X11.5	28	31.3	46.3	46	41	
1CN-45-20	M45X2	Z1.1/4"X11.5	35	30.3	51.8	46	50	40 重系列 S
1CN-52-20	M52X2	Z1.1/4"X11.5	42	31.8	55.8	55	60	
1CN-52-24	M52X2	Z1.1/2"X11.5	42	32.8	55.8	55	60	
1DN-14-04	M14X1.5	Z1/4"X18	6	22.2	37.2	17	17	
1DN-16-04	M16X1.5	Z1/4"X18	8	22.2	37.2	17	19	
1DN-18-04	M18X1.5	Z1/4"X18	10	21.7	38.2	19	22	
1DN-18-06	M18X1.5	Z3/8"X18	10	22.4	38.9	19	22	
1DN-20-04	M20X1.5	Z1/4"X18	12	23.7	40.2	22	24	
1DN-20-06	M20X1.5	Z3/8"X18	12	24.4	40.9	22	24	25 重系列 S
1DN-20-08	M20X1.5	Z1/2"X14	12	25.9	42.4	22	24	
1DN-22-08	M22X1.5	Z1/2"X14	14	27.4	45.4	24	27	
1DN-24-08	M24X1.5	Z1/2"X14	16	26.9	45.4	27	30	
1DN-30-12	M30X2	Z3/4"X14	20	28.4	49.9	32	36	
1DN-36-12	M36X2	Z3/4"X14	25	30.9	34.0	41	46	
1DN-36-16	M36X2	Z1"X11.5	25	35.3	59.3	41	46	
1DN-42-16	M42X2	Z1"X11.5	25	35.8	59.3	46	46	
1DN-42-20	M42X2	Z1.1/4"X11.5	30	36.3	62.8	46	50	
1DN-52-24	M52X2	Z1.1/2"X11.5	38	39.8	70.8	55	60	


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DN-30-12RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DN-30-12RN.

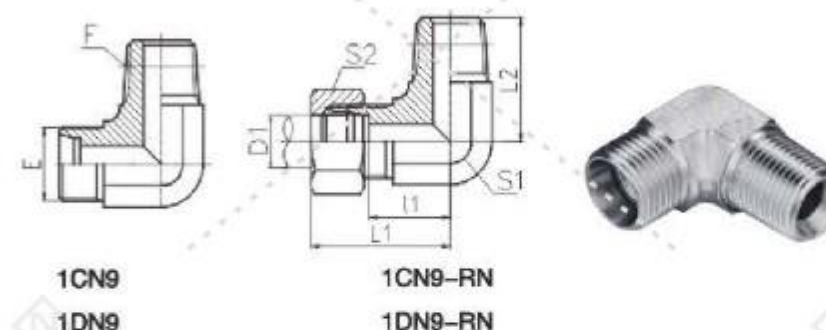

90° 弯布锥管外螺纹
90° ELBOW NPT MALE

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	尺寸 DIMENSIONS					压力等级 MPa
	E	F		I1	L1	L2	S1	S2	
1CN9-12-02	M12X1.5	Z1/8"X27	6	13	28	21	11	14	25 轻系列 L
1CN9-12-04	M12X1.5	Z1/4"X18	6	15.5	30.5	25.5	14	14	
1CN9-14-04	M14X1.5	Z1/4"X18	8	15.5	30.5	25.5	14	17	
1CN9-16-06	M16X1.5	Z3/8"X18	10	17.5	32.5	29.5	16	19	
1CN9-18-04	M18X1.5	Z1/4"X18	12	19	34	28	19	22	
1CN9-18-06	M18X1.5	Z3/8"X18	12	19	34	31	19	22	
1CN9-18-08	M18X1.5	Z1/2"X14	12	21	36	36.7	22	22	
1CN9-22-06	M22X1.5	Z3/8"X18	15	22	37	32.5	22	27	
1CN9-22-08	M22X1.5	Z1/2"X14	15	22	37	36.7	22	27	16 轻系列 L
1CN9-26-08	M26X1.5	Z1/2"X14	18	25.5	42	40	27	32	
1CN9-26-12	M26X1.5	Z3/4"X14	18	25.5	42	44	27	32	
1CN9-30-12	M30X2	Z3/4"X14	22	29.3	45.8	45	30	36	
1CN9-30-16	M30X2	Z1"X11.5	22	32		50	33	36	
1CN9-36-16	M36X2	Z1"X11.5	28	33.3	49.8	51.5	36	41	
1CN9-45-20	M45X2	Z1.1/4"X11.5	35	39.2	60.7	63	48	50	
1CN9-52-24	M52X2	Z1.1/2"X11.5	42	44.8	67.8	65	55	60	
1DN9-14-04	M14X1.5	Z1/4"X18	6	17.5	32.5	25.5	14	17	40 重系列 S
1DN9-16-04	M16X1.5	Z1/4"X18	8	18.5	33.7	26.5	16	19	
1DN9-18-06	M18X1.5	Z3/8"X18	10	19.5	36	31	19	22	
1DN9-20-04	M20X1.5	Z1/4"X18	12	19.5	36	28	19	24	
1DN9-20-06	M20X1.5	Z3/8"X18	12	19.5	36	31	19	24	
1DN9-22-06	M22X1.5	Z3/8"X18	14	23	41	32.5	22	27	
1DN9-22-08	M22X1.5	Z1/2"X14	14	23	41	36.7	22	27	
1DN9-24-06	M24X1.5	Z3/8"X18	16	24	42.5	33.5	24	30	
1DN9-24-08	M24X1.5	Z1/2"X14	16	24	42.5	37.5	24	30	25 重系列 S
1DN9-30-08	M30X2	Z1/2"X14	20	28	49.8	41	30	36	
1DN9-30-12	M30X2	Z3/4"X14	20	28	49.8	45	30	36	
1DN9-36-12	M36X2	Z3/4"X14	25	32.8	56.8	49	36	46	
1DN9-36-16	M36X2	Z1"X11.5	25	32.8	56.8	51.5	36	46	
1DN9-42-16	M42X2	Z1"X11.5	30	36.2	62.7	54.5	41	50	
1DN9-42-20	M42X2	Z1.1/4"X11.5	30	36.2	62.7	54.5	41	50	
1DN9-52-20	M52X2	Z1.1/4"X11.5	38	45.8	76.8	65	55	60	
1DN9-52-24	M52X2	Z1.1/2"X11.5	38	45.8	76.8	65	55	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1CN9-30-12RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1CN9-30-12RN.

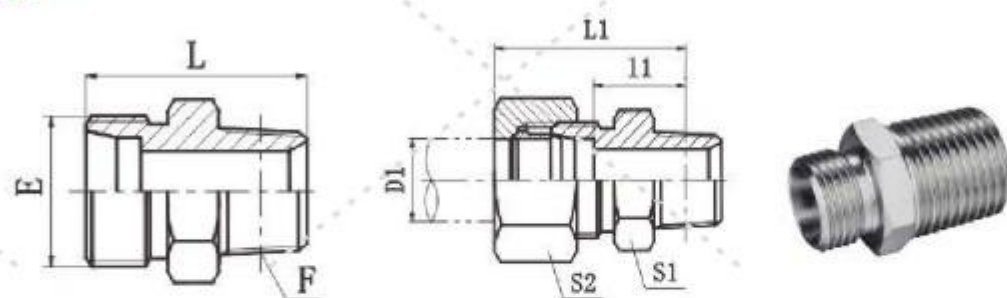


英锥管外螺纹
BSPT MALE

1CT-SP
1DT-SP

1CT-SP/RN
1DT-SP/RN

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	尺寸 DIMENSIONS				压力等级 MPa
	E	F		I1	L1	S1	S2	
1CT-12-02SP	M12x1.5	R1/8"x28	6	13	28	12	14	25 轻系列
1CT-12-04SP	M12x1.5	R1/4"x19	6	16.5	31.5	14	14	
1CT-14-04SP	M14x1.5	R1/4"x19	8	16.5	31.5	14	17	
1CT-14-06SP	M14x1.5	R3/8"x19	8	17.6	32.6	19	17	
1CT-16-04SP	M16x1.5	R1/4"x19	10	17.5	32.5	17	19	
1CT-16-06SP	M16x1.5	R3/8"x19	10	18.6	33.6	19	19	
1CT-16-08SP	M16x1.5	R1/2"x14	10	21.8	36.8	22	19	
1CT-18-04SP	M18x1.5	R1/4"x19	12	18.5	33.5	19	22	
1CT-18-06SP	M18x1.5	R3/8"x19	12	18.6	33.6	19	22	
1CT-18-08SP	M18x1.5	R1/2"x14	12	21.8	36.8	22	22	
1CT-22-08SP	M22x1.5	R1/2"x14	15	22.8	37.8	24	27	16 轻系列
1CT-26-08SP	M26x1.5	R1/2"x14	18	23.3	39.8	27	32	
1CT-26-12SP	M26x1.5	R3/4"x14	18	22	38.5	30	32	
1CT-30-12SP	M30x2	R3/4"x14	22	24	40.5	32	36	
1CT-36-16SP	M36x2	R1"x11	28	29.6	46.1	38	41	
1CT-36-20SP	M36x2	R1.1/4"x11	28	29.3	45.8	46	41	
1CT-45-20SP	M45x2	R1.1/4"x11	35	28.3	49.8	46	50	
1CT-52-20SP	M52x2	R1.1/4"x11	42	29.8	52.8	55	60	
1CT-52-24SP	M52x2	R1.1/2"x11	42	29.8	52.8	55	60	40 重系列 S
1DT-14-04SP	M14x1.5	R1/4"x19	6	13	36.5	17	17	
1DT-16-04SP	M16x1.5	R1/4"x19	8	21.5	36.5	17	19	
1DT-18-04SP	M18x1.5	R1/4"x19	10	21	37.5	19	22	
1DT-20-04SP	M20x1.5	R1/4"x19	12	23	39.5	22	24	
1DT-20-06SP	M20x1.5	R3/8"x19	12	23.1	39.6	22	24	
1DT-22-06SP	M22x1.5	R3/8"x19	14	24.6	42.6	24	27	
1DT-22-08SP	M22x1.5	R1/2"x14	14	27.8	45.8	24	27	
1DT-24-06SP	M24x1.5	R3/8"x19	16	24.1	42.6	27	30	25 重系列 S
1DT-24-08SP	M24x1.5	R1/2"x14	16	27.3	45.8	27	30	
1DT-30-12SP	M30x2	R3/4"x14	20	28	49.5	32	36	
1DT-36-12SP	M36x2	R3/4"x14	25	29.5	53.5	38	46	
1DT-36-16SP	M36x2	R1"x11	25	34.1	58.1	38	46	
1DT-42-16SP	M42x2	R1"x11	30	35.6	62.1	46	50	
1DT-42-20SP	M42x2	R1.1/4"x11	30	34.3	60.8	46	50	
1DT-52-20SP	M52x2	R1.1/4"x11	38	36.8	67.8	55	60	
1DT-52-24SP	M52x2	R1.1/2"x11	38	36.8	67.8	55	60	

注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如1DT-22-08SP/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DT-22-08SP/RN.

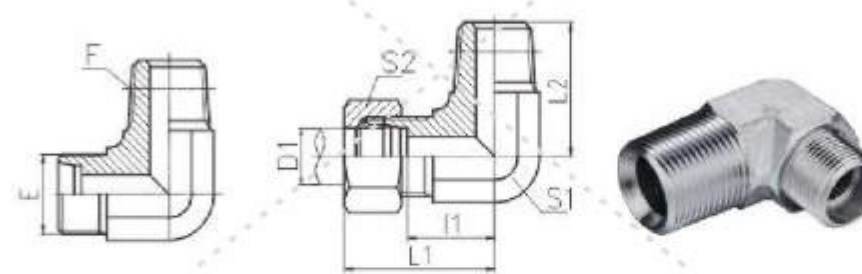


90° 弯英锥管外螺纹
90° ELBOW BSPT MALE

1CT9-SP
1DT9-SP

1CT9-SP/RN
1DT9-SP/RN

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	尺寸 DIMENSIONS					压力等级 MPa
	E	F		I1	L1	L2	S1	S2	
1CT9-12-02SP	M12X1.5	R1/8"X28	6	13	28	21	11	14	25 轻系列 L
1CT9-12-04SP	M12X1.5	R1/4"X19	6	15.5	30.5	25.5	14	14	
1CT9-14-04SP	M14X1.5	R1/4"X19	8	15.5	30.5	25.5	14	17	
1CT9-16-04SP	M16X1.5	R1/4"X19	10	17.5	32.5	26.5	16	19	
1CT9-16-06SP	M16X1.5	R3/8"X19	10	17.5	32.5	28.5	16	19	
1CT9-16-08SP	M16X1.5	R1/2"X14	10	21	36	36	22	19	
1CT9-18-04SP	M18X1.5	R1/4"X19	12	21	34	28	19	22	
1CT9-18-06SP	M18X1.5	R3/8"X19	12	19	34	30.5	19	22	
1CT9-18-08SP	M18X1.5	R1/2"X14	12	21	36	36	22	22	
1CT9-22-06SP	M22X1.5	R3/8"X19	15	22	37	32.5	22	27	
1CT9-22-08SP	M22X1.5	R1/2"X14	15	22	37	36	22	27	16 轻系列 L
1CT9-22-12SP	M22X1.5	R3/4"X14	15	25.5	40.5	43.5	27	27	
1CT9-26-08SP	M26X1.5	R1/2"X14	18	25.5	42	39.5	27	32	
1CT9-26-12SP	M26X1.5	R3/4"X14	18	25.5	42	43.5	27	32	
1CT9-30-12SP	M30X2	R3/4"X14	22	29.5	45.8	45.3	30	36	
1CT9-30-16SP	M30X2	R1"X11	22	31.5	48	50	33	36	
1CT9-36-16SP	M36X2	R1"X11	28	33.3	49.8	52	36	41	
1CT9-36-20SP	M36X2	R1.1/4"X11	28	36.2	52.7	57	41	41	
1CT9-45-20SP	M45X2	R1.1/4"X11	35	39.2	60.7	61	48	50	40 重系列 S
1CT9-52-24SP	M52X2	R1.1/2"X11	42	44.8	67.8	68	55	60	
1DT9-14-04SP	M14X1.5	R1/4"X19	6	17.5	32.5	25.5	14	17	
1DT9-16-04SP	M16X1.5	R1/4"X19	8	18.7	33.7	26.5	16	19	
1DT9-18-06SP	M18X1.5	R3/8"X19	10	19.5	36	30.5	19	22	
1DT9-20-04SP	M20X1.5	R1/4"X19	12	19.5	36	28	19	24	
1DT9-20-06SP	M20X1.5	R3/8"X19	12	19.5	36	30.5	19	24	
1DT9-22-06SP	M22X1.5	R3/8"X19	14	23	41	32.5	22	27	
1DT9-22-08SP	M22X1.5	R1/2"X14	14	23	41	36	22	27	25 重系列 S
1DT9-24-06SP	M24X1.5	R3/8"X19	16	24	42.5	33.5	24	30	
1DT9-24-08SP	M24X1.5	R1/2"X14	16	24	42.5	37.3	24	30	
1DT9-30-08SP	M30X2	R1/2"X14	20	28.3	49.8	41	30	36	
1DT9-30-12SP	M30X2	R3/4"X14	20	28.3	49.8	45.3	30	36	
1DT9-36-12SP	M36X2	R3/4"X14	25	33.3	57.3	52	36	46	
1DT9-36-16SP	M36X2	R1"X11	25	32.8	56.8	52.5	36	46	
1DT9-42-16SP	M42X2	R1"X11	30	36.2	62.7	56.5	41	50	
1DT9-42-20SP	M42X2	R1.1/4"X11	30	36.2	62.7	57	41	50	25 重系列 S
1DT9-52-20SP	M52X2	R1.1/4"X11	38	45.8	76.8	67	55	60	
1DT9-52-24SP	M52X2	R1.1/2"X11	38	45.8	76.8	68	55	60	

注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如1CT9-30-12SP/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1CT9-30-12SP/RN.

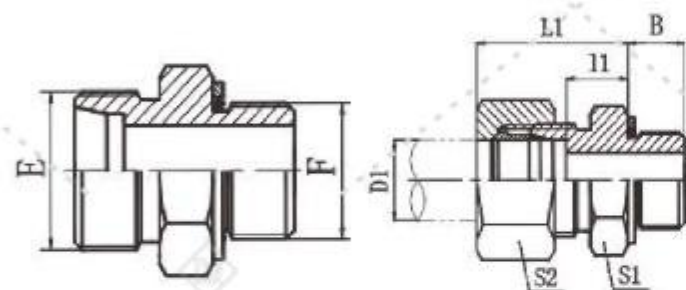

1CH
1DH

1CH-RN
1DH-RN




公制外螺纹柱端ISO 6149
METRIC THREAD STUD
ENDS ISO 6149

代号 PART NO.	螺 纹 THREAD		管子外径D1 TUBE O.D.	O 形 圈 O RING	尺 寸 DIMENSIONS					压力等级 MPa
	E	F			B	I1	L1	S1	S2	
1CH-12-10	M12X1.5	M10X1	6	O08.1X1.6	8.5	9.5	23	14	14	31.5 轻系列 L
1CH-14	M14X1.5	M14X1.5	8	O11.3X2.4	11	10	25	19	17	
1CH-16-14	M16X1.5	M14X1.5	10	O11.3X2.4	11	13	26	19	19	
1CH-16	M16X1.5	M16X1.5	10	O13.3X2.4	11.5	13	28	22	19	
1CH-18-16	M18X1.5	M16X1.5	12	O13.3X2.4	11.5	12	27	22	22	
1CH-22-18	M22X1.5	M18X1.5	15	O15.3X2.4	12.5	13.5	29	24	27	
1CH-22-20	M22X1.5	M20X1.5	15	O17.3X2.4	12	15	30.5	27	27	
1CH-22	M22X1.5	M22X1.5	12	O19.3X2.4	13	15	31	27	27	
1CH-26-22	M26X1.5	M22X1.5	18	O19.3X2.4	13	14.5	31	27	32	
1CH-26	M26X1.5	M26X1.5	18	O23.5X3.0	13.5	13.5	31	32	32	
1CH-30-27	M30X2	M27X2	22	O23.5X3.0	16	16.5	33	32	36	16 轻系列 L
1CH-30	M30X2	M30X2	22	O26.5X3.0	16	17.5	33	36	36	
1CH-36-27	M36X2	M27X2	28	O23.5X3.0	16	17.5	34	41	41	
1CH-36-33	M36X2	M33X2	28	O29.5X3.0	16	17.5	34	41	41	
1CH-45-42	M45X2	M42X2	35	O38.5X3.0	16	17.5	37	50	50	
1CH-52-48	M52X2	M48X2	42	O44.5X3.0	17.5	19		55	60	
1DH-14	M14X1.5	M14X1.5	6	O11.3X2.4	11	15	28	19	17	63 重系列 S
1DH-14-12	M14X1.5	M12X1.5	6	O09.3X2.4	11	13	28	17	17	
1DH-16-14	M16X1.5	M14X1.5	8	O11.3X2.4	11	15	30	19	19	
1DH-18-16	M18X1.5	M16X1.5	10	O13.3X2.4	11.5	15	31	22	22	
1DH-20-18	M20X1.5	M18X1.5	12	O15.3X2.4	12.5	17	33	24	24	
1DH-24-22	M24X1.5	M22X1.5	16	O19.3X2.4	13	18.5	37	27	30	40 重系列 S
1DH-30	M30X2	M30X2	20	O26.5X3.0	16	20.5	42	36	36	
1DH-30-27	M30X2	M27X2	20	O23.5X3.0	16	20.5	42	32	36	
1DH-36-27	M36X2	M27X2	25	O23.5X3.0	16	23	47	41	46	
1DH-36-33	M36X2	M33X2	25	O29.5X3.0	16	23	47	41	46	
1DH-42	M42X2	M42X2	30	O38.5X3.0	16	23.5	50	50	50	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DH-20-18RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DH-20-18RN.

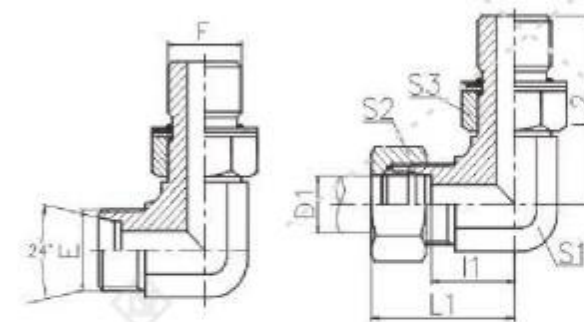

1CH9-OG
1DH9-OG

1CH9-OG/RN
1DH9-OG/RN




90° 弯公制外螺纹可调向柱端ISO 6149
90° ELBOW METRIC THREAD
ADJUSTABLE STUD ENDS ISO 6149

代号 PART NO.	螺 纹 THREAD		管子外径D1 TUBE O.D.	O 形 圈 O RING	尺 寸 DIMENSIONS						压力等级 MPa
	E	F			I1	L1	L2	S1	S2	S3	
1CH9-12-10OG	M12X1.5	M10X1	6	O08.1X1.6	13	28	26.5	11	14	14	31.5 轻系列 L
1CH9-14-12OG	M14X1.5	M12X1.5	8	O09.3X2.4	15.5	30.5	32	14	17	17	
1CH9-16-14OG	M16X1.5	M14X1.5	10	O11.3X2.4	17.5	32.5	34	16	19	19	
1CH9-18-16OG	M18X1.5	M16X1.5	12	O13.3X2.4	19	34	36	19	22	22	
1CH9-22-18OG	M22X1.5	M18X1.5	15	O15.3X2.4	22	37	39.5	22	27	24	
1CH9-26-22OG	M26X1.5	M22X1.5	18	O19.3X2.4	25.5	42	43.5	27	32	27	
1CH9-30-27OG	M30X2	M27X2	22	O23.5X3.0	29.3	45.8	50	30	36	32	16 轻系列 L
1CH9-36-33OG	M36X2	M33X2	28	O29.5X3.0	33.3	49.8	54	36	41	41	
1CH9-45-42OG	M45X2	M42X2	35	O38.5X3.0	39	58.5	61	48	50	50	
1CH9-52-48OG	M52X2	M48X2	42	O44.5X3.0	44.5	67.5	68.5	50	60	55	
1DH9-14-12OG	M14X1.5	M12X1.5	6	O09.3X2.4	17.5	32.5	32	14	17	17	63 重系列 S
1DH9-16-14OG	M16X1.5	M14X1.5	8	O11.3X2.4	18.7	33.7	34	16	19	19	
1DH9-18-16OG	M18X1.5	M16X1.5	10	O13.3X2.4	19.5	36	36	19	22	22	
1DH9-20-18OG	M20X1.5	M18X1.5	12	O15.3X2.4	19.5	36	37	19	24	24	
1DH9-22-20OG	M22X1.5	M20X1.5	14	O17.3X2.4	23	41	40	22	27	27	
1DH9-24-22OG	M24X1.5	M22X1.5	16	O19.3X2.4	24	42	37.5	24	30	27	40 重系列 S
1DH9-30-27OG	M30X2	M27X2	20	O23.5X3.0	28.3	49.8	50	30	36	32	
1DH9-36-33OG	M36X2	M33X2	25	O29.5X3.0	32.8	56.8	54	36	46	41	
1DH9-42OG	M42X2	M42X2	30	O38.5X3.0	36.2	62.7	57.2	41	50	50	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DH9-20-18OG/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DH9-20-18OG/RN.

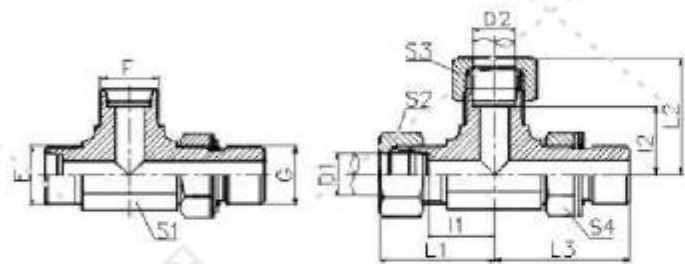

ACCH-OG
ADDH-OG


ACCH-OG/RN
ADDH-OG/RN



公制外螺纹可调向柱端ISO6149主支三通
METRIC MALE ADJUSTABLE
STUD END ISO 6149 RUN TEE

代号 PART NO.	螺 纹 THREAD		管子外径TUBE O.D.		O 形 圈 O RING	尺 寸 DIMENSIONS					压力等级 MPa
	E, F	G	D1	D2		A	B	C	S1	S2	
ACCH-12-12-10OG	M12X1.5	M10X1	6	6	8.1X1.6	20	20	26.5	11	14	31.5 轻系列 L
ACCH-14-14-12OG	M14X1.5	M12X1.5	8	8	9.3X2.4	22.5	22.5	32.5	14	17	
ACCH-16-16-14OG	M16X1.5	M14X1.5	10	10	11.3X2.4	24.5	24.5	34	16	19	
ACCH-18-18-16OG	M18X1.5	M16X1.5	12	12	13.3X2.4	26	26	36	19	22	
ACCH-26-26-22OG	M26X1.5	M22X1.5	18	18	19.3X2.4	33	33	43.5	27	27	16 轻系列L
ACCH-30-30-27OG	M30X2	M27X2	22	22	23.5X3	37	37	50	30	32	
ACCH-36-36-33OG	M36X2	M33X2	28	28	29.2X3	40.7	40.7	54	36	41	63 重系列 S
ADDH-14-14-12OG	M14X1.5	M12X1.5	6	6	9.3X2.4	25.8	25.8	32	14	17	
ADDH-16-16-14OG	M16X1.5	M14X1.5	8	8	11.3X2.4	27	27	34	16	19	
ADDH-18-18-16OG	M18X1.5	M16X1.5	10	10	13.3X2.4	28.5	28.5	36	19	22	
ADDH-20-20-18OG	M20X1.5	M18X1.5	12	12	15.3X2.4	28.5	28.5	37	19	24	40 重系列 S
ADDH-24-24-22OG	M24X1.5	M22X1.5	16	16	19.3X2.4	32.2	32.2	41.2	24	27	
ADDH-30-30-27OG	M30X2	M27X2	20	20	23.5X3	41.5	41.5	50	30	32	40 重系列 S
ADDH-36-36-33OG	M36X2	M33X2	25	25	29.2X3	46.5	46.5	54	36	41	
ADDH-42-42-42OG	M42X2	M42X2	30	30	38.5X3	49.5	49.5	57.2	41	50	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如ACCH-30-30-27OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to inset suffix "RN" in after of part no., for example ACCH-30-30-27OG/RN.

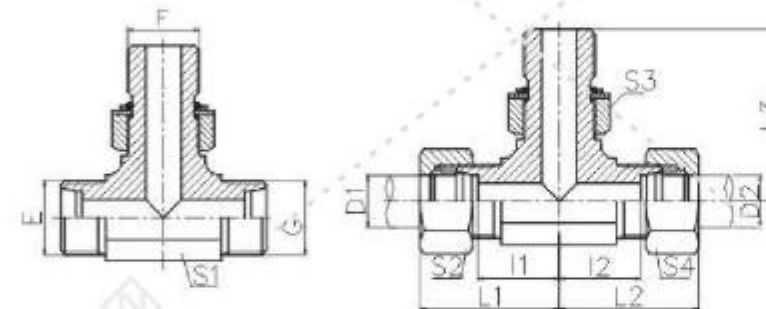

ACHC-OG
ADHD-OG


ACHC-OG/RN
ADHD-OG/RN



公制外螺纹可调向柱端ISO 6149分支三通
METRIC MALE ADJUSTABLE STUD
END ISO 6149 BRANCH TEE

代 号 PART NO.	螺 纹 THREAD		管子外径D1,D2 TUBE O.D.	O 形 圈 O RING	尺 寸 DIMENSIONS							压力等级 MPa
	E,G	F			I1,I2	L1,L2	L3	S1	S2,S4	S3		
ACHC-12-10-12OG	M12X1.5	M10X1	6	O08.1X1.6	13	28	26.5	11	14	14	31.5 轻系列 L	
ACHC-14-12-14OG	M14X1.5	M12X1.5	8	O09.3X2.4	15.5	30.5	32	14	17	17		
ACHC-16-14-16OG	M16X1.5	M14X1.5	10	O11.3X2.4	17.5	32.5	34	16	19	19		
ACHC-18-16-18OG	M18X1.5	M16X1.5	12	O13.3X2.4	19	34	36	19	22	22		
ACHC-22-18-22OG	M22X1.5	M18X1.5	15	O15.3X2.4	22	37	39.5	22	27	24		
ACHC-26-22-26OG	M26X1.5	M22X1.5	18	O19.3X2.4	25.5	42	43.5	27	32	27		
ACHC-30-27-30OG	M30X2	M27X2	22	O23.5X3.0	29.3	45.8	50	30	36	32	16 轻系列L	
ACHC-36-33-36OG	M36X2	M33X2	28	O29.5X3.0	33.3	49.8	54	36	41	41		
ADHD-14-12-14OG	M14X1.5	M12X1.5	6	O09.3X2.4	17.5	32.5	32	14	17	17	63 重系列 S	
ADHD-16-14-16OG	M16X1.5	M14X1.5	8	O11.3X2.4	18.7	33.7	34	16	19	19		
ADHD-18-16-18OG	M18X1.5	M16X1.5	10	O13.3X2.4	19.5	36	36	19	22	22		
ADHD-20-18-20OG	M20X1.5	M18X1.5	12	O15.3X2.4	19.5	36	37	19	24	24		
ADHD-24-22-24OG	M24X1.5	M22X1.5	16	O19.3X2.4	24	42	37.5	24	30	27		
ADHD-30-27-30OG	M30X2	M27X2	20	O23.5X3.0	28.3	49.8	50	30	36	32		
ADHD-36-33-36OG	M36X2	M33X2	25	O29.5X3.0	32.8	56.8	54	36	46	41	40 重系列 S	
ADHD-42-42-42OG	M42X2	M42X2	30	O38.5X3.0	36.2	62.7	57.2	41	50	50		


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如ACHC-30-27-30OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example ACHC-30-27-30OG/RN.

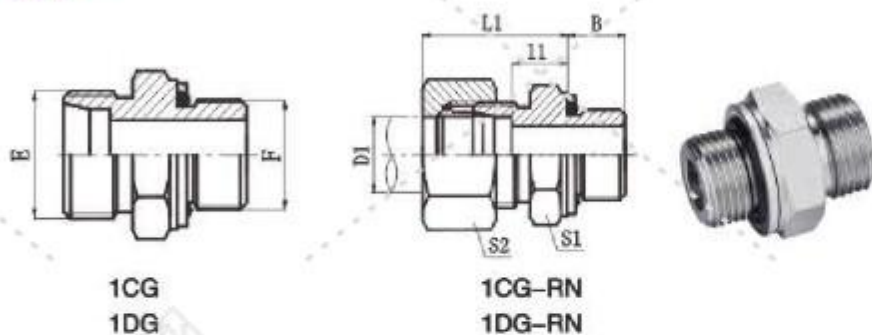

英管螺纹O形圈密封柱端
BSPP THREAD STUD ENDS
WITH O-RING SEALING

代 号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS					压力等级 MPa
	E	F		B	l1	L1	S1	S2	
1CG-12-02	M12X1.5	G1/8"X28	6	9.5	8.5	23	14	14	31.5 轻系列 L
1CG-12-04	M12X1.5	G1/4"X19	6	10	10	25	19	14	
1CG-14-04	M14x1.5	G1/4"X19	8	10	10	25	19	17	
1CG-14-08	M14x1.5	G1/2"X14	8	14	13	27.5	27	34	
1CG-16-04	M16x1.5	G1/4"X19	10	10	11	26	19	19	
1CG-16-06	M16x1.5	G3/8"X19	10	11.5	12.5	27	22	19	
1CG-16-08	M16x1.5	G1/2"X14	10	14	14	29	27	19	
1CG-18-06	M18x1.5	G3/8"X19	12	11.5	12.5	27	22	22	
1CG-18-08	M18x1.5	G1/2"X14	12	14	13	28	27	22	
1CG-22-06	M22x1.5	G3/8"X19	15	11.5	13.5	29	24	27	
1CG-22-08	M22x1.5	G1/2"X14	15	14	14	29	27	27	
1CG-22-12	M22x1.5	G3/4"X14	15	15.5	20	30	32	32	
1CG-26-08	M26x1.5	G1/2"X14	18	14	14.5	31	27	32	16 轻系列 L
1CG-26-12	M26x1.5	G3/4"X14	18	15.5	14.5	32	32	32	
1CG-30-12	M30x2	G3/4"X14	22	15.5	16.5	33	32	36	
1CG-30-16	M30x2	G1"X11	22	18	17.5	35	41	36	
1CG-36-16	M36x2	G1"X11	28	18	17.5	34	41	41	
1CG-45-20	M45x2	G1.1/4"X11	35	20	17.5	39	50	50	
1CG-52-20	M52x2	G1.1/4"X11	42	20	19	42	55	60	
1CG-52-24	M52x2	G1.1/2"X11	42	21.5	19	42	55	60	
1CG-52-32	M52x2	G2"X11	42	24.5	25	44	70	60	63 重系列 S
1DG-14-04	M14X1.5	G1/4"X19	6	10	13	28	19	17	
1DG-16-04	M16X1.5	G1/4"X19	8	10	15	31	19	19	
1DG-18-04	M18x1.5	G1/4"X19	10	10	14.5	31	19	22	
1DG-18-06	M18x1.5	G3/8"X19	10	11.5	15	31	22	22	
1DG-20-06	M20x1.5	G3/8"X19	12	11.5	17	32	22	24	
1DG-20-08	M20x1.5	G1/2"X14	12	14	17.5	34	27	24	
1DG-22-06	M22x1.5	G3/8"X19	14	11.5	19	37	24	27	
1DG-22-08	M22x1.5	G1/2"X14	14	14	19	37	27	27	40 重系列 S
1DG-24-04	M24x1.5	G1/4"X19	16	11	18	37	27	30	
1DG-24-08	M24x1.5	G1/2"X14	16	14	18.5	37	27	30	
1DG-30-12	M30x2	G3/4"X14	20	15.5	20.5	42	32	36	
1DG-36-12	M36x2	G3/4"X14	25	15.5	23	47	41	46	
1DG-36-16	M36x2	G1"X11	25	18	17.5	47	41	46	
1DG-42-16	M42x2	G1"X11	30	18	23.5	48	46	50	
1DG-42-20	M42x2	G1.1/4"X11	30	20	23.5	50	50	50	
1DG-52-24	M52x2	G1.1/2"X11	38	21.5	26	57	55	60	31.5重系列S


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DG-20-08RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DG-20-08RN.

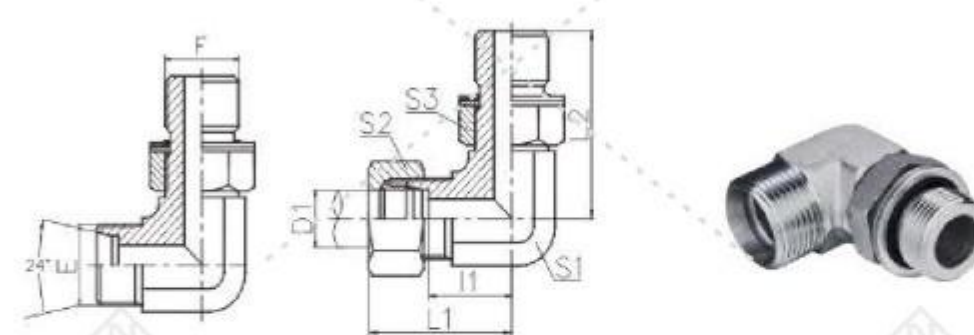

90° 弯英管螺纹可调向O形圈密封柱端
90° ELBOW BSPP THREAD ADJUSTABLE
STUD ENDS WITH O-RING SEALING

代 号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS						压力等级 MPa
	E	F		l1	L1	L2	S1	S2	S3	
1CG9-12-02OG	M12X1.5	G1/8"X28	6	13	28	26.2	11	14	14	轻系列 L
1CG9-14-04OG	M14X1.5	G1/4"X19	8	15.5	30.5	31.3	14	17	19	
1CG9-16-06OG	M16X1.5	G3/8"X19	10	17.5	32.5	35.8	16	19	22	
1CG9-18-06OG	M18X1.5	G3/8"X19	12	19	34	36.8	19	22	22	
1CG9-22-08OG	M22X1.5	G1/2"X14	15	22	37	43.2	22	27	27	
1CG9-26-08OG	M26X1.5	G1/2"X14	18	25.5	42	46	27	32	27	
1CG9-26-12OG	M26X1.5	G3/4"X14	18	25.5	42	49.3	27	32	32	
1CG9-30-12OG	M30X2	G3/4"X14	22	29.3	45.8	52	30	36	32	16 轻系列 L
1CG9-30-16OG	M30X2	G1"X11	22	31.5	48	53	33	36	41	
1CG9-36-16OG	M36X2	G1"X11	28	33	49.8	56	36	41	41	
1CG9-36-20OG	M36X2	G1.1/4"X11	28	36	52.8	59	41	41	50	
1CG9-45-20OG	M45X2	G1.1/4"X11	35	39.2	60.7	63	48	50	50	
1CG9-52-24OG	M52X2	G1.1/2"X11	42	44.8	67.8	68.5	55	60	55	
1DG9-14-04OG	M14X1.5	G1/4"X19	6	17.5	32.5	31.3	14	17	19	63 重系列 S
1DG9-16-04OG	M16X1.5	G1/4"X19	8	18.7	33.7	32.5	16	19	19	
1DG9-16-06OG	M16X1.5	G3/8"X19	8	18.7	33.7	35.8	16	19	22	
1DG9-18-06OG	M18X1.5	G3/8"X19	10	19.5	36	36.8	19	22	22	
1DG9-20-06OG	M20X1.5	G3/8"X19	12	19.5	36	36.8	19	24	22	
1DG9-22-08OG	M22X1.5	G1/2"X14	14	23	41	43.2	22	27	27	
1DG9-24-08OG	M24X1.5	G1/2"X14	16	24	42.5	43	24	30	27	
1DG9-30-12OG	M30X2	G3/4"X14	20	28	49.5	52	30	36	32	40 重系列 S
1DG9-36-16OG	M36X2	G1"X11	25	32.8	56.8	56	36	46	41	
1DG9-42-20OG	M42X2	G1.1/4"X11	30	36.2	62.7	58	41	50	50	
1DG9-52-24OG	M52X2	G1.1/2"X11	38	45.8	76.8	68.5	55	60	55	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1CG9-30-12OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1CG9-30-12OG/RN.

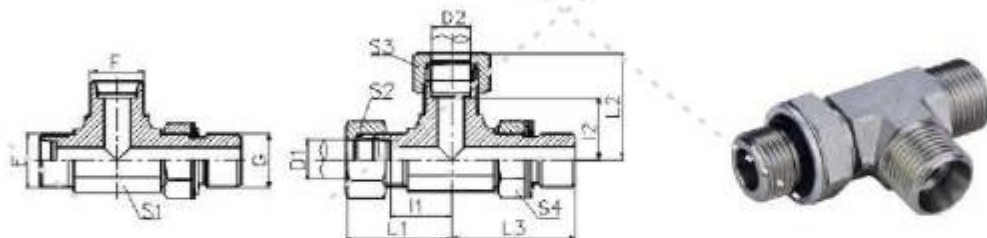

ACCG-OG

ADDG-OG


ACCG-OG/RN

ADDG-OG/RN

英管螺纹可调向O形圈密封柱端主支三通
BSPB THREAD ADJUSTABLE STUD
ENDWITH O-RING SEALING RUN TEE

代 号 PART NO.	螺 纹 THREAD		管子外径 TUBE C.D. D1,D2	尺 寸 DIMENSIONS						压力等级 MPa
	E,F	G		I1,I2	L1,L2	L3	S1	S2,S3	S4	
ACCG-12-12-02OG	M12X1.5	G1/8"X28	6	13	28	26.2	11	14	14	31.5 L
ACCG-14-14-04OG	M14X1.5	G1/4"X19	8	15.5	30.5	31.3	14	17	19	
ACCG-16-16-04OG	M16X1.5	G1/4"X19	10	17.5	32.5	32.5	16	19	19	
ACCG-18-18-06OG	M18X1.5	G3/8"X19	12	19	34	36.8	19	22	22	
ACCG-22-22-08OG	M22X1.5	G1/2"X14	15	22	37	43.2	22	27	27	
ACCG-26-26-08OG	M26X1.5	G1/2"X14	18	25.5	42	46.5	27	32	27	
ACCG-30-30-12OG	M30X2	G3/4"X14	22	29.3	45.8	52	30	36	32	16 轻系列
ACCG-36-36-16OG	M36X2	G1"X11	28	33.3	49.8	56	36	41	41	
ACCG-45-45-20OG	M45X2	G1.1/4"X11	35	39.2	60.7	63	48	50	50	
ADDG-14-14-04OG	M14X1.5	G1/4"X19	6	17.5	32.5	31.3	14	17	19	63 重系列 S
ADDG-16-16-04OG	M16X1.5	G1/4"X19	8	18.7	33.7	32.5	16	19	19	
ADDG-18-18-06OG	M18X1.5	G3/8"X19	10	19.5	36	36.8	19	22	22	
ADDG-20-20-06OG	M20X1.5	G3/8"X19	12	19.5	36	36.8	19	24	22	
ADDG-22-22-08OG	M22X1.5	G1/2"X14	14	23	41	43.2	22	27	27	
ADDG-24-24-08OG	M24X1.5	G1/2"X14	16	24	42.5	44	24	30	27	40 重系列 S
ADDG-30-30-12OG	M30X2	G3/4"X14	20	28.3	49.8	52	30	36	32	
ADDG-36-36-16OG	M36X2	G1"X11	25	32.8	56.8	56	36	46	41	
ADDG-42-42-20OG	M42X2	G1.1/4"X11	30	36.2	62.7	58	41	50	50	

注：如需带卡套及卡套螺母,订货时请在代号后加“RN”,如ACCG-18-18-06OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut ,it is necessary to insert suffix "RN" after our Part No., for example ACCG-18-18-06OG/RN.

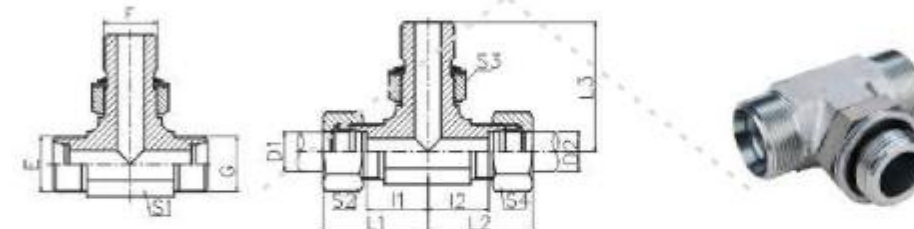

ACGC-OG

ADGD-OG


ACGC-OG/RN

ADGD-OG/RN

英管螺纹可调向O形圈密封柱端分支三通
BSPB THREAD ADJUSTABLE STUD ENDS
WITH O-RING SEALING BRANCH TEE

代 号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D. D1,D2	尺 寸 DIMENSIONS						压力等级 MPa
	E,G	F		I1,I2	L1,L2	L3	S1	S2,S4	S3	
ACGC-12-02-12OG	M12X1.5	G1/8"X28	6	13	28	26.2	11	14	14	31.5 L
ACGC-14-04-14OG	M14X1.5	G1/4"X19	8	15.5	30.5	31.3	14	17	19	
ACGC-16-04-16OG	M16X1.5	G1/4"X19	10	17.5	32.5	32.5	16	19	19	
ACGC-18-06-18OG	M18X1.5	G3/8"X19	12	19	34	36.8	19	22	22	
ACGC-22-08-22OG	M22X1.5	G1/2"X14	15	22	37	43.2	22	27	27	
ACGC-26-08-26OG	M26X1.5	G1/2"X14	18	25.5	42	46.5	27	32	27	
ACGC-30-12-30OG	M30X2	G3/4"X14	22	29.3	45.8	52	30	36	32	16 轻系列 L
ACGC-36-16-36OG	M36X2	G1"X11	28	33.3	49.8	56	36	41	41	
ACGC-45-20-45OG	M45X2	G1.1/4"X11	35	39.2	60.7	63	48	50	50	
ADGD-14-04-14OG	M14X1.5	G1/4"X19	6	17.5	32.5	31.3	14	17	19	63 重系列 S
ADGD-16-04-16OG	M16X1.5	G1/4"X19	8	18.7	33.7	32.5	16	19	19	
ADGD-18-06-18OG	M18X1.5	G3/8"X19	10	19.5	36	36.8	19	22	22	
ADGD-20-06-20OG	M20X1.5	G3/8"X19	12	19.5	36	36.8	19	24	22	
ADGD-22-08-22OG	M22X1.5	G1/2"X14	14	23	41	43.2	22	27	27	
ADGD-24-08-24OG	M24X1.5	G1/2"X14	16	24	42.5	44	24	30	27	40 重系列 S
ADGD-30-12-30OG	M30X2	G3/4"X14	20	28.3	49.8	52	30	36	32	
ADGD-36-16-36OG	M36X2	G1"X11	25	32.8	56.8	56	36	46	41	
ADGD-42-20-42OG	M42X2	G1.1/4"X11	30	36.2	62.7	58	41	50	50	


注：如需带卡套及卡套螺母,订货时请在代号后加“RN”,如ACGC-18-06-18OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut ,it is necessary to insert suffix "RN" after our part no., for example ACCG-18-06-18OG/RN.

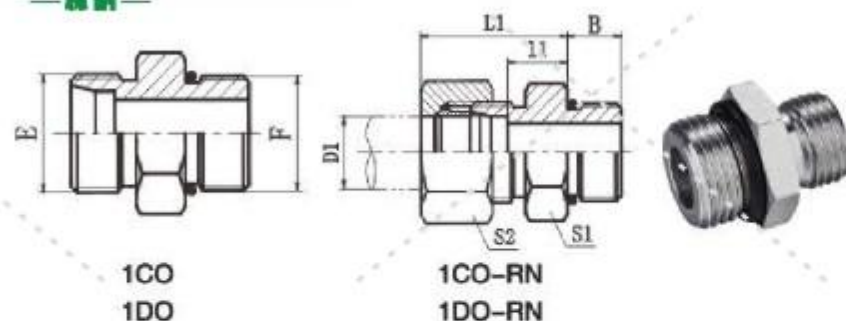

美制螺纹O形圈密封柱端ISO 11926
UN、UNF THREAD STUD ENDS
WITH O-RING SEALING ISO 11926

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D. D1	尺寸 DIMENSIONS					压力等级 MPa
	E	F		B	l1	L1	S1	S2	
1CO-14-04	M14X1.5	7/16"X20	8	9	10	25	17	17	31.5 轻系列 L
1CO-16-04	M16X1.5	7/16"X20	10	9	11	26	17	19	
1CO-18-08	M18X1.5	3/4"X16	12	11	13	28	24	22	
1CO-18-10	M18X1.5	7/8"X14	12	12.7	14.3	29	27	22	
1CO-22-08	M22X1.5	3/4"X16	15	11	14	29	24	27	
1CO-22-10	M22X1.5	7/8"X14	15	12.7	15.3	30	27	27	
1CO-22-12	M22X1.5	1.1/16"X12	15	15.09	11.91	30	32	27	
1CO-26-08	M26X1.5	3/4"X16	18	11	14.5	31	27	32	
1CO-26-10	M26X1.5	7/8"X14	18	12.7	14.8	31	27	32	16 轻系列 L
1CO-30-08	M30X2	3/4"X16	18	11.13	13.87	33	32	36	
1CO-30-10	M30X2	7/8"X14	22	12.7	16.8	33	32	36	
1CO-30-12	M30X2	1.1/16"X12	22	15	16.5	33	32	36	
1CO-30-16	M30X2	1.5/16"X12	22	15	17.5	34	41	36	
1CO-36-12	M36X2	1.1/16"X12	28	15.09	14.41	34	41	41	
1CO-36-16	M36X2	1.5/16"X12	28	15	17.5	34	41	41	
1CO-45-16	M45X2	1.5/16"X12	35	15	17.5	39	46	50	
1CO-45-20	M45X2	1.5/8"X12	35	15.09	16.41	39	50	50	63 重系列 S
1CO-52-20	M52X2	1.5/8"X12	42	15.09	15.91	42	55	60	
1DO-16-04	M16X1.5	7/16"X20	8	9	15	30	17	19	
1DO-18-06	M18X1.5	9/16"X18	10	10	14.5	31	19	22	
1DO-20-06	M20X1.5	9/16"X18	12	10	14.5	31	22	24	
1DO-20-08	M20X1.5	3/4"X16	12	11	17.5	34	24	24	
1DO-24-08	M24X1.5	3/4"X16	16	11	15.5	34	24	30	
1DO-24-10	M24X1.5	7/8"X14	16	12.7	18.8	37	27	30	
1DO-30-08	M30X2	3/4"X16	20	11	20.5	42	32	36	40 重系列 S
1DO-30-10	M30X2	7/8"X14	20	12.7	20.8	42	32	36	
1DO-30-12	M30X2	1.1/16"X12	20	15	20.5	42	32	36	
1DO-36-12	M36X2	1.1/16"X12	25	15.09	19.91	47	41	46	
1DO-36-16	M36X2	1.5/16"X12	25	15	23	47	41	46	
1DO-42-16	M42X2	1.5/16"X12	30	15	23.5	50	46	50	
1DO-42-20	M42X2	1.5/8"X12	30	15	23.5	50	50	50	
1DO-52-20	M52X2	1.5/8"X12	38	15.09	22.9	53.9	55	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DO-30-12RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DO-30-12RN.

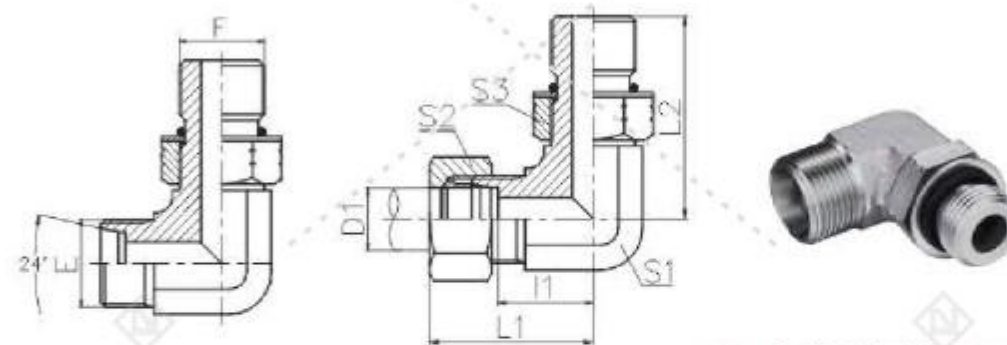

1CO9-OG

1DO9-OG


1CO9-OG/RN

1DO9-OG/RN

90° 弯美制螺纹可调向O形圈密封柱端ISO 11926
90° ELBOW UN、UNF THREAD ADJUSTABLE
STUD ENDS WITH O-RING SEALING ISO 11926

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D. D1	尺寸 DIMENSIONS						压力等级 MPa
	E	F		l1	L1	L2	S1	S2	S3	
1CO9-12-04OG	M12X1.5	7/16"X20	6	13	28	27.2	11	14	17	31.5 轻系列 L
1CO9-14-06OG	M14X1.5	9/16"X18	8	15.5	30.5	31.8	14	17	19	
1CO9-16-06OG	M16X1.5	9/16"X18	10	17.5	32.5	33.3	16	19	19	
1CO9-18-08OG	M18X1.5	3/4"X16	12	19	34	37.5	19	22	24	
1CO9-22-10OG	M22X1.5	7/8"X14	15	22	37	44	22	27	27	
1CO9-22-08OG	M22X1.5	3/4"X16	15	22	37	39.5	22	27	24	
1CO9-26-12OG	M26X1.5	1.1/16"X12	18	25.5	42	51	27	32	32	
1CO9-30-12OG	M30X2	1.1/16"X12	22	29.3	45.8	53.5	30	36	32	16 轻系列 L
1CO9-36-12OG	M36X2	1.1/16"X12	28	33.5	47.8	57.5	36	41	41	
1CO9-36-16OG	M36X2	1.5/16"X12	28	33.3	49.8	57.5	36	41	41	
1CO9-45-20OG	M42X2	1.5/8"X12	35	39.2	60.7	63	48	50	50	
1CO9-52-24OG	M52X2	1.7/8"X12	42	44.8	67.8	70.5	55	60	55	
1DO9-14-04OG	M14X1.5	7/16"X20	6	17.5	32.5	30	14	17	17	63 重系列 S
1DO9-16-06OG	M16X1.5	9/16"X18	8	18.7	33.7	33.3	16	19	19	
1DO9-18-06OG	M18X1.5	9/16"X18	10	19.5	36	33.5	19	22	19	
1DO9-18-08OG	M18X1.5	3/4"X16	10	19.5	36	37.5	19	22	24	
1DO9-20-08OG	M20X1.5	3/4"X16	12	19.5	36	37.5	19	24	24	
1DO9-22-10OG	M22X1.5	7/8"X14	14	23	41	44	22	27	27	
1DO9-24-10OG	M24X1.5	7/8"X14	16	24	42.5	46.5	24	30	27	
1DO9-30-12OG	M30X2	1.1/16"X12	20	28.3	49.5	53.5	30	36	32	40 重系列 S
1DO9-36-16OG	M36X2	1.5/16"X12	25	32.8	56.8	57.5	36	46	41	
1DO9-42-20OG	M42X2	1.5/8"X12	30	36.2	62.7	59.5	41	50	50	
1DO9-52-24OG	M52X2	1.7/8"X12	38	45.8	76.8	70.5	55	60	55	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1CO9-30-12OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1CO9-30-12OG/RN.

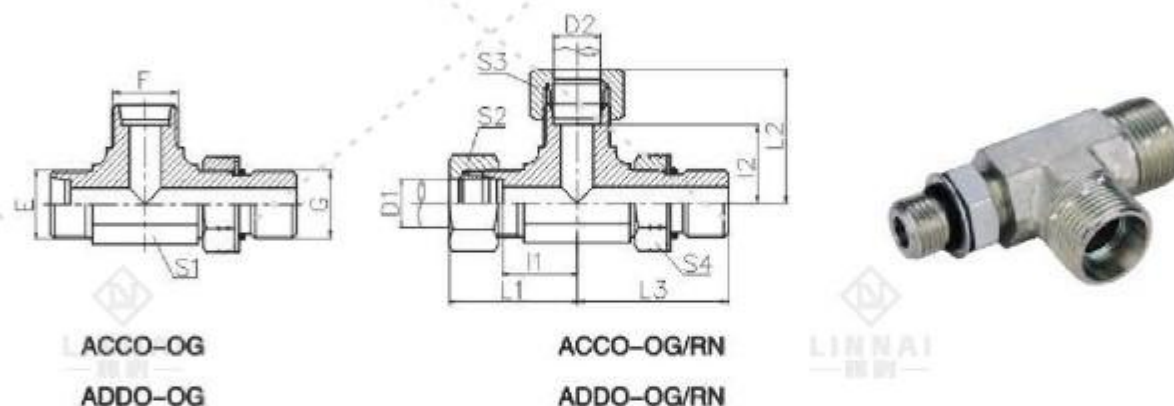


美制螺纹可调向O形圈密封柱端主支三通
UN、UNF THREAD ADJUSTABLE
STUD ENDS WITH O-RING SEALING RUN TEE

代 号 PART NO.	螺 纹 THREAD		管子外径TUBE O.D.	尺 寸 DIMENSIONS							压力等级 MPa
	E,F	G		D1,D2	I1,I2	L1,L2	L3	S1	S2,S3	S4	
ACCO-12-12-04OG	M12X1.5	7/16"X20	6	13	28	27.2	11	14	17	31.5 轻系列 L	
ACCO-14-14-06OG	M14X1.5	9/16"X18	8	15.5	30.5	31.8	14	17	19		
ACCO-16-16-06OG	M16X1.5	9/16"X18	10	17.5	32.5	33.3	16	19	19		
ACCO-18-18-08OG	M18X1.5	3/4"X16	12	19	34	37.5	19	22	24		
ACCO-22-22-10OG	M22X1.5	7/8"X14	15	22	37	44	22	27	27		
ACCO-26-26-12OG	M26X1.5	1.1/16"X12	18	25.5	42	51	27	32	32		
ACCO-30-30-12OG	M30X2	1.1/16"X12	22	29.3	45.8	53.5	30	36	32	16 轻系列 L	
ACCO-36-36-16OG	M36X2	1.5/16"X12	28	33.3	49.8	57.5	36	41	41		
ACCO-45-45-20OG	M45X2	1.5/8"X12	35	39.2	60.7	63	48	50	50		
ADDO-14-14-04OG	M14X1.5	7/16"X20	6	17.5	32.5	30	14	17	17	63 重系列 S	
ADDO-16-16-06OG	M16X1.5	9/16"X18	8	18.7	33.7	33.3	16	19	19		
ADDO-18-18-06OG	M18X1.5	9/16"X18	10	19.5	36	33.5	19	22	19		
ADDO-20-20-08OG	M20X1.5	3/4"X16	12	19.5	36	37.5	19	24	24		
ADDO-22-22-10OG	M22X1.5	7/8"X14	14	23	41	44	22	27	27		
ADDO-24-24-10OG	M24X1.5	7/8"X14	16	24	42.5	46.5	24	30	27		
ADDO-30-30-12OG	M30X2	1.1/16"X12	20	28.3	49.8	53.5	30	36	32	40 重系列 S	
ADDO-36-36-16OG	M36X2	1.5/16"X12	25	32.8	56.8	57.5	36	46	41		
ADDO-42-42-20OG	M42X2	1.5/8"X12	30	36.2	62.7	59.5	41	50	50		

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如ACCO-30-30-12OG/RN。


Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example ACCO-30-30-12OG/RN.

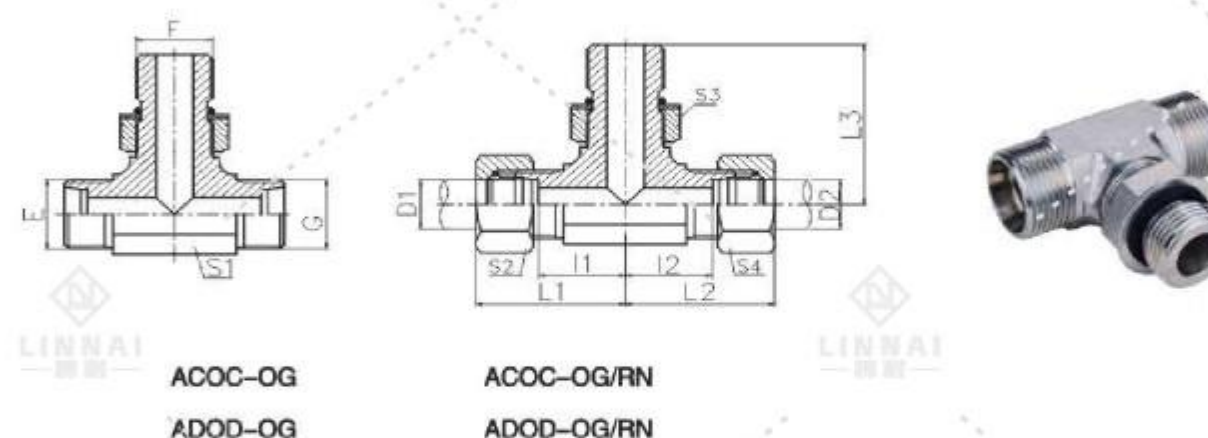

美制螺纹可调向O形圈密封柱端分支三通
UN、UNF THREAD ADJUSTABLE
STUD ENDS WITH O-RING SEALING BRANCH TEE

代 号 PART NO.	螺 纹 THREAD		管子外径TUBE O.D.	尺 寸 DIMENSIONS							压力等级
	E,G	F		D1,D2	I1,I2	L1,L2	L3	S1	S2,S4	S3	MPa
ACOC-12-04-12OG	M12X1.5	7/16"X20	6	13	28	27.2	11	14	17	31.5 轻系列 L	
ACOC-14-06-14OG	M14X1.5	9/16"X18	8	15.5	30.5	31.8	14	17	19		
ACOC-16-06-16OG	M16X1.5	9/16"X18	10	17.5	32.5	33.3	16	19	19		
ACOC-18-08-18OG	M18X1.5	3/4"X16	12	19	34	37.5	19	22	24		
ACOC-22-10-22OG	M22X1.5	7/8"X14	15	22	37	44	22	27	27		
ACOC-26-12-26OG	M26X1.5	1.1/16"X12	18	25.5	42	51	27	32	32		
ACOC-30-12-30OG	M30X2	1.1/16"X12	22	29.3	45.8	53.5	30	36	32	16 轻系列 L	
ACOC-36-16-36OG	M36X2	1.5/16"X12	28	33.3	49.8	57.5	36	41	41		
ACOC-45-20-45OG	M45X2	1.5/8"X12	35	39.2	60.7	63	48	50	50		
ADOD-14-04-14OG	M14X1.5	7/16"X20	6	17.5	32.5	30	14	17	17	63 重系列 S	
ADOD-16-06-16OG	M16X1.5	9/16"X18	8	18.7	33.7	33.3	16	19	19		
ADOD-18-06-18OG	M18X1.5	9/16"X18	10	19.5	36	33.5	19	22	19		
ADOD-20-08-20OG	M20X1.5	3/4"X16	12	19.5	36	37.5	19	24	24		
ADOD-22-10-22OG	M22X1.5	7/8"X14	14	23	41	44	22	27	27		
ADOD-24-10-24OG	M24X1.5	7/8"X14	16	24	42.5	46.5	24	30	27		
ADOD-30-12-30OG	M30X2	1.1/16"X12	20	28.3	49.8	53.5	30	36	32	40 重系列 S	
ADOD-36-16-36OG	M36X2	1.5/16"X12	25	32.8	56.8	57.5	36	46	41		
ADOD-42-20-42OG	M42X2	1.5/8"X12	30	36.2	62.7	59.5	41	50	50		


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如ACOC-30-12-30OG/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example ACOC-30-12-30OG/RN.

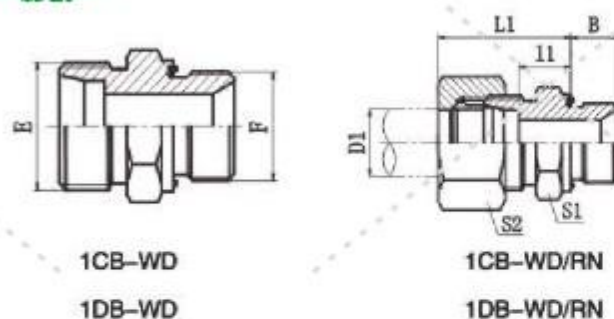

英管螺纹胶垫密封柱端
BSPP THREAD WITH CAPTIVE SEAL

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	胶垫 SEAL	尺 寸 DIMENSIONS					压力等级 MPa
	E	F			B	I1	L1	S1	S2	
1CB-12-02WD	M12X1.5	G1/8"X28	6	WD-B02	8	8.5	23.5	14	14	31.5 轻系列 L
1CB-12-04WD	M12X1.5	G1/4"X19	6	WD-B04	12	10	25	19	14	
1CB-14-02WD	M14X1.5	G1/8"X28	8	WD-B02	8	9	24	14	17	
1CB-14-04WD	M14X1.5	G1/4"X19	8	WD-B04	12	10	24	19	17	
1CB-14-06WD	M14X1.5	G3/8"X19	8	WD-B06	12	11	26	22	17	
1CB-16-04WD	M16X1.5	G1/4"X19	10	WD-B04	12	11	24.5	19	19	
1CB-16-06WD	M16X1.5	G3/8"X19	10	WD-B06	12	12.5	26	22	19	
1CB-16-08WD	M16X1.5	G1/2"X14	10	WD-B08	14	13	28	27	19	
1CB-18-04WD	M18X1.5	G1/4"X19	12	WD-B04	12	12	27	19	22	
1CB-18-06WD	M18X1.5	G3/8"X19	12	WD-B06	12	12.5	26	22	22	
1CB-18-08WD	M18X1.5	G1/2"X14	12	WD-B08	14	14	28	27	22	
1CB-22-04WD	M22X1.5	G1/4"X19	15	WD-B04	12	13	28	24	27	
1CB-22-06WD	M22X1.5	G3/8"X19	15	WD-B06	12	13.5	28	24	27	
1CB-22-08WD	M22X1.5	G1/2"X14	15	WD-B08	14	14	29	27	27	
1CB-22-12WD	M22X1.5	G3/4"X14	15	WD-B12	16	15	29	32	27	
1CB-26-08WD	M26X1.5	G1/2"X14	18	WD-B08	14	14.5	31	27	32	16 轻系列 L
1CB-26-12WD	M26X1.5	G3/4"X14	18	WD-B12	16	14.5	31	32	32	
1CB-30-12WD	M30X2	G3/4"X14	22	WD-B12	16	16.5	33	32	36	
1CB-36-16WD	M36X2	G1"X11	28	WD-B16	18	17.5	34	41	41	
1CB-45-20WD	M45X2	G1.1/4"X11	35	WD-B20	20	17.5	39	50	50	63 重系列 S
1CB-52-24WD	M52X2	G1.1/2"X11	42	WD-B24	22	19	42	55	60	
1DB-14-04WD	M14X1.5	G1/4"X19	6	WD-B04	12	15		19	17	
1DB-16-04WD	M16X1.5	G1/4"X19	8	WD-B04	12	15	30	19	19	
1DB-16-06WD	M16X1.5	G3/8"X19	8	WD-B06	12	15.5	30	22	19	
1DB-18-04WD	M18X1.5	G1/4"X19	10	WD-B04	12	14.5	31	19	22	
1DB-18-06WD	M18X1.5	G3/8"X19	10	WD-B06	12	14.5	31	22	22	
1DB-18-08WD	M18X1.5	G1/2"X14	10	WD-B08	14	17.5	34	27	22	
1DB-20-04WD	M20X1.5	G1/4"X19	12	WD-B04	12	16.5	33	22	24	40 重系列 S
1DB-20-06WD	M20X1.5	G3/8"X19	12	WD-B06	12	15	33	22	24	
1DB-20-08WD	M20X1.5	G1/2"X14	12	WD-B08	14	17.5	34	27	24	
1DB-22-08WD	M22X1.5	G1/2"X14	14	WD-B08	14	19	37	27	27	
1DB-24-06WD	M24X1.5	G3/8"X19	16	WD-B06	12	18	36.5	27	30	
1DB-24-08WD	M24X1.5	G1/2"X14	16	WD-B08	14	18.5	37	27	30	
1DB-24-12WD	M24X1.5	G3/4"X14	16	WD-B12	16	20.5	39	32	30	
1DB-30-12WD	M30X2	G3/4"X14	20	WD-B12	16	20.5	42	32	36	
1DB-36-08WD	M36X2	G1/2"X14	25	WD-B08	14	23	47	41	46	31.5重系列S
1DB-36-12WD	M36X2	G3/4"X14	25	WD-B12	16	23	47	41	46	
1DB-36-16WD	M36X2	G1"X11	25	WD-B16	18	23	47	41	46	
1DB-42-20WD	M42X2	G1.1/4"X11	30	WD-B20	20	23.5	50	50	50	
1DB-52-24WD	M52X2	G1.1/2"X11	38	WD-B24	22	26	57	55	60	

注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如1DB-20-08WD/RN。
Note: In case if you are interested to order the adaptor in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DB-20-08WD/RN.

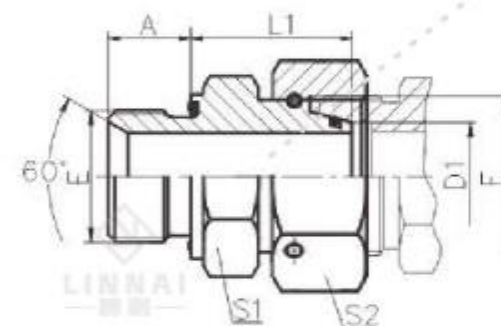


2BC-WD
2BD-WD




英管螺纹胶垫密封柱端
公制内螺纹24° 锥O形圈密封
BSPP THREAD WITH CAPTIVE SEAL
METRIC FEMALE 24° CONE O-RING SEALING

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	胶垫 SEAL	尺 寸 DIMENSIONS				压力等级 MPa
	E	F			A	L1	S1	S2	
2BC-02-12WD	G1/8"X28	M12X1.5	6	WD-B02	8	25	14	14	31.5 轻系列L
2BC-04-14WD	G1/4"X19	M14X1.5	8	WD-B04	12	25.5	19	17	
2BC-04-16WD	G1/4"X19	M16X1.5	10	WD-B04	12	25.5	19	19	
2BC-06-18WD	G3/8"X19	M18X1.5	12	WD-B06	12	29	22	22	
2BC-08-22WD	G1/2"X14	M22X1.5	15	WD-B08	14	28.5	27	27	
2BC-08-26WD	G1/2"X14	M26X1.5	18	WD-B08	14	33	27	32	
2BC-12-30WD	G3/4"X14	M30X2	22	WD-B12	16	31	32	36	16 轻系列L
2BC-16-36WD	G1"X11	M36X2	28	WD-B16	18	33.5	41	41	
2BC-20-45WD	G1.1/4"X11	M45X2	35	WD-B20	20	44	50	50	
2BC-24-52WD	G1.1/2"X11	M52X2	42	WD-B24	22	43.5	55	60	63 重系列S
2BD-04-14WD	G1/4"X19	M14X1.5	6	WD-B04	12	28	19	17	
2BD-04-16WD	G1/4"X19	M16X1.5	8	WD-B04	12	26.5	19	19	
2BD-06-18WD	G3/8"X19	M18X1.5	10	WD-B06	12	29.5	22	22	
2BD-06-20WD	G3/8"X19	M20X1.5	12	WD-B06	12	30	22	24	
2BD-08-22WD	G1/2"X14	M22X1.5	14	WD-B08	14	32.5	27	27	
2BD-08-24WD	G1/2"X14	M24X1.5	16	WD-B08	14	34	27	30	40重系列S
2BD-12-30WD	G3/4"X14	M30X2	20	WD-B12	16	37	32	36	
2BD-16-36WD	G1"X11	M36X2	25	WD-B16	18	43.5	41	46	
2BD-20-42WD	G1.1/4"X11	M42X2	30	WD-B20	20	47.5	50	50	
2BD-24-52WD	G1.1/2"X11	M52X2	38	WD-B24	22	49	55	60	31.5重系列S

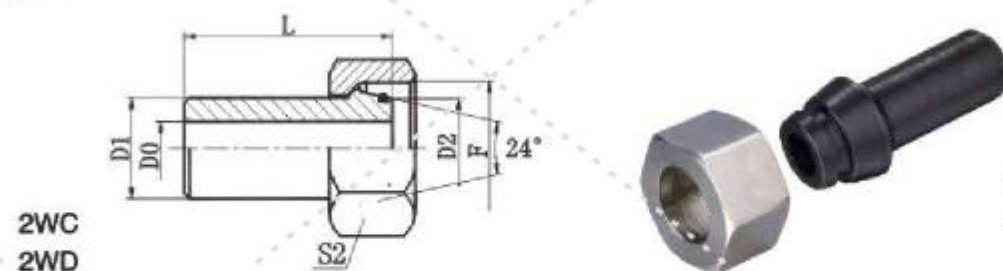

焊接接头
WELD FITTINGS

代 号 PART NO.	螺 纹 THREAD	管子尺寸 TUBE SIZE	尺 寸 DIMENSIONS				压力等级
	F	D1x1	L	D0	D2	S2	MPa
2WC-6X1.5	M12X1.5	6X1.5	30	2.5	6	14	轻系列L
2WC-8X2.0	M14X1.5	8X2.0	30	4	8	17	
2WC-12X2.0	M18X1.5	12X2.0	31	7.5	12	22	
2WC-15X2.0	M22X1.5	15X2.0	35	10	15	27	
2WC-18X2.0	M26X1.5	18X2.0	35	13	18	32	
2WC-22X2.0	M30X2	22X2.0	35	17	22	36	16 轻系列 L
2WC-28X2.5	M36X2	28X2.5	41	23	28	41	
2WC-35X3.0	M45X2	35X3.0	48	29	35	50	
2WC-42X3.0	M52X2	42X3.0	50.5	36	42	60	
2WD-6X1.5	M14X1.5	6X1.5	28.5	2.5	6	17	63 重系列 S
2WD-8X2.0	M16X1.5	8X2.0	29	4	8	19	
2WD-10X1.0	M18X1.5	10X1.0	32	6.5	10	22	
2WD-10X1.5	M18X1.5	10X1.5	32	6.5	10	22	
2WD-10X2.0	M18X1.5	10X2.0	32	6	10	22	
2WD-12X1.5	M20X1.5	12X1.5	32.5	8	12	27	
2WD-12X2.0	M20X1.5	12X2.0	32.5	8	12	27	
2WD-12X2.5	M20X1.5	12X2.5	32.5	7	12	27	
2WD-16X1.5	M24X1.5	16X1.5	39	13	16	30	40 重系列 S
2WD-16X2.0	M24X1.5	16X2.0	39	12	16	30	
2WD-16X2.5	M24X1.5	16X2.5	39	11	16	30	
2WD-16X3.0	M24X1.5	16X3.0	39	10	16	30	
2WD-20X2.0	M30X2	20X2.0	43	15	20	36	
2WD-20X2.5	M30X2	20X2.5	43	15	20	36	
2WD-20X3.0	M30X2	20X3.0	43	14	20	36	
2WD-20X4.0	M30X2	20X4.0	43	12	20	36	
2WD-25X2.5	M36X2	25X2.5	50	20	25	46	
2WD-25X3.0	M36X2	25X3.0	50	19	25	46	
2WD-25X4.0	M36X2	25X4.0	50	17	25	46	
2WD-25X5.0	M36X2	25X5.0	50	15	25	46	
2WD-30X3.0	M42X2	30X3.0	52	24	30	50	25 重系列 S
2WD-30X4.0	M42X2	30X4.0	52	22	30	50	
2WD-30X5.0	M42X2	30X5.0	52	20	30	50	
2WD-30X6.0	M42X2	30X6.0	52	18	30	50	
2WD-38X4.0	M52X2	38X4.0	56.5	30	38	60	
2WD-38X5.0	M52X2	38X5.0	56.5	28	38	60	
2WD-38X6.0	M52X2	38X6.0	56.5	26	38	60	
2WD-38X7.0	M52X2	38X7.0	56.5	24	38	60	

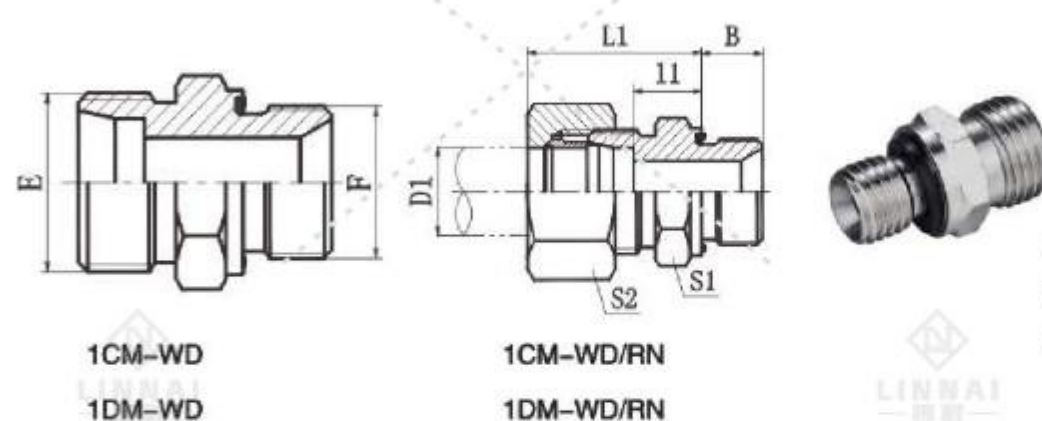


公制螺纹胶垫密封柱端
METRIC THREAD WITH
CAPTIVE SEAL

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	胶垫 SEAL	尺寸 DIMENSIONS					压力等级 MPa
	E	F			B	I1	L1	S1	S2	
1CM-12-10WD	M12X1.5	M10X1	6	WD-B02	8	8.5	23	14	14	31.5 轻系列L
1CM-14-12WD	M14X1.5	M12X1.5	8	WD-M12	12	10	25	17	17	
1CM-16-14WD	M16X1.5	M14X1.5	10	WD-B04	12	11	26	19	19	
1CM-16-18WD	M16X1.5	M18X1.5	10	WD-M18	12	12.5	27	24	19	
1CM-18-16WD	M18X1.5	M16X1.5	12	WD-M16	12	12.5	27	22	22	
1CM-18WD	M18X1.5	M18X1.5	12	WD-M18	12	12.5	27	24	22	16 轻系列L
1CM-18-22WD	M18X1.5	M22X1.5	12	WD-M22	14	14	29	27	22	
1CM-22-18WD	M22X1.5	M18X1.5	15	WD-M18	12	13.5	29	24	27	
1CM-22WD	M22X1.5	M22X1.5	15	WD-M22	14	15	30	27	27	
1CM-26-22WD	M26X1.5	M22X1.5	18	WD-M22	14	14.5	31	27	32	
1CM-30-26WD	M30X2	M26X1.5	22	WD-B12	16	16.5	33	32	36	63 重系列S
1CM-30-27WD	M30X2	M27X2	22	WD-B12	16	16.5	33	32	36	
1CM-36-33WD	M36X2	M33X2	28	WD-B16	18	17.5	34	41	41	
1CM-45-42WD	M45X2	M42X2	35	WD-B20	20	17.5	39	50	50	
1CM-52-48WD	M52X2	M48X2	42	WD-B24	22	19	42	55	60	
1DM-14-12WD	M14X1.5	M12X1.5	6	WD-M12	12	13	28	17	17	40 重系列S
1DM-16-14WD	M16X1.5	M14X1.5	8	WD-B04	12	15	30	19	19	
1DM-18-16WD	M18X1.5	M16X1.5	10	WD-M16	12	15	31	22	22	
1DM-20-18WD	M20X1.5	M18X1.5	12	WD-M18	12	17	33	24	24	
1DM-22-20WD	M22X1.5	M20X1.5	14	WD-M20	14	19	37	27	27	
1DM-24-22WD	M24X1.5	M22X1.5	16	WD-M22	14	18.5	37	27	30	31.5重系列S
1DM-30-27WD	M30X2	M27X2	20	WD-B12	16	20.5	42	32	36	
1DM-36-33WD	M36X2	M33X2	25	WD-B16	18	23	47	41	46	
1DM-42WD	M42X2	M42X2	30	WD-B20	20	23.5	50	50	50	
1DM-52-48WD	M52X2	M48X2	38	WD-B24	22	26	57	55	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DM-20-18WD/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DM-20-18WD/RN.

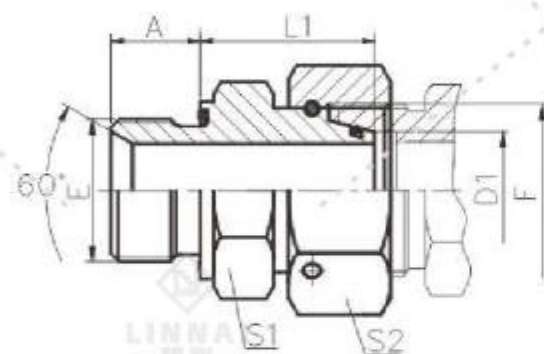


2MC-WD

2MD-WD



公制螺纹胶垫密封柱端/
公制内螺纹24° 锥O形圈密封
METRIC THREAD WITH CAPTIVE SEAL/
METRIC FEMALE 24° CONE O-RING SEALING

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	胶垫 SEAL	尺 寸 DIMENSIONS				压力等级 MPa
	E	F			A	L1	S1	S2	
2MC-10-12WD	M10X1	M12X1.5	6	WD-B02	8	24.5	14	14	31.5 轻系列 L
2MC-12-14WD	M12X1.5	M14X1.5	8	WD-M12	12	26.5	17	17	
2MC-14-16WD	M14X1.5	M16X1.5	10	WD-B04	12	27.5	19	19	
2MC-16-18WD	M16X1.5	M18X1.5	12	WD-M13	12	30.5	22	22	
2MC-18-22WD	M18X1.5	M22X1.5	15	WD-M18	12	31.5	24	27	
2MC-22-26WD	M22X1.5	M26X1.5	18	WD-M22	14	31.5	27	32	
2MC-26-30WD	M26X1.5	M30X2	22	WD-B12	16	32.5	32	36	16 轻系列 L
2MC-33-36WD	M33X2	M36X2	28	WD-B16	18	35	41	41	
2MC-42-45WD	M42X2	M45X2	35	WD-B20	20	42.5	50	50	
2MC-48-52WD	M48X2	M52X2	42	WD-B24	22	46.5	55	60	
2MD-12-14WD	M12X1.5	M14X1.5	6	WD-M12	12	27	17	17	63 重系列 S
2MD-14-16WD	M14X1.5	M16X1.5	8	WD-B04	12	29.5	19	19	
2MD-16-18WD	M16X1.5	M18X1.5	10	WD-M16	12	32	22	22	
2MD-18-20WD	M18X1.5	M20X1.5	12	WD-M18	12	34	24	24	
2MD-20-22WD	M20X1.5	M22X1.5	14	WD-M20	14	36.5	27	27	
2MD-22-24WD	M22X1.5	M24X1.5	16	WD-M22	14	37	27	30	
2MD-27-30WD	M27X2	M30X2	20	WD-B12	16	43	32	36	40 重系列 S
2MD-33-36WD	M33X2	M36X2	25	WD-B16	18	48	41	46	
2MD-42-42WD	M42X2	M42X2	30	WD-B20	20	51	50	50	
2MD-48-52WD	M48X2	M52X2	38	WD-B24	22	60	55	60	

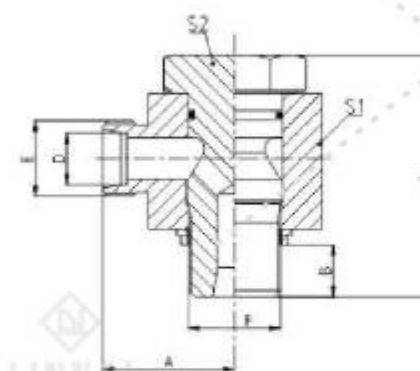


1CI-WD

1DI-WD



公制螺纹铰接接头
METRIC BANJO

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS					压力等级 MPa
	E	F		B	A	L	S1	S2	
1CI-12-10WD	M12 × 1.5	M10X1	6	8.5	19	32.5	17	17	31.5 轻系列 L
1CI-14-12WD	M14 × 1.5	M12X1.5	8	13	21.5	42	22	19	
1CI-16-14WD	M16 × 1.5	M14X1.5	10	13	22.5	42	22	19	
1CI-18-16WD	M18 × 1.5	M16X1.5	12	13	25	48	27	22	
1CI-22-18WD	M22 × 1.5	M18X1.5	15	13	28.5	51.5	30	24	
1CI-26-22WD	M26 × 1.5	M22X1.5	18	16.5	29	59	32	27	
1CI-30-26WD	M30 × 2	M26X1.5	22	17.5	35	68.5	41	32	16 轻系列 L
1CI-36-33WD	M36 × 2	M33X2	28	19.5	39.5	84	50	41	
1CI-45-42WD	M45X2	M42X2	35	21.5	46.5	96	60	50	
1CI-52-48WD	M52X2	M48X2	42	23.5	51.5	109	70	60	
1DI-14-12WD	M14 × 1.5	M12X1.5	6	13	23.5	54.2	22	19	40 轻系列 S
1DI-16-14WD	M16 × 1.5	M14X1.5	8	13	23.5	42	22	19	
1DI-18-16WD	M18 × 1.5	M16X1.5	10	13	26	48	27	22	
1DI-20-18WD	M20 × 1.5	M18X1.5	12	13	29	51.5	30	24	
1DI-22-18WD	M22 × 1.5	M18X1.5	14	16.5	31	51.5	32	24	
1DI-24-22WD	M24 × 1.5	M22X1.5	16	16.5	31	59	32	27	
1DI-30-26WD	M30 × 2	M26X1.5	20	18	37	69	41	32	31.5 轻系列S
1DI-36-33WD	M36 × 2	M33X2	25	19.5	43.5	84	50	41	
1DI-42WD	M42X2	M42X2	30	21.5	50.5	96	60	50	16 轻系列S
1DI-52-48WD	M52X2	M48X2	38	23.5	57.5	109	70	60	

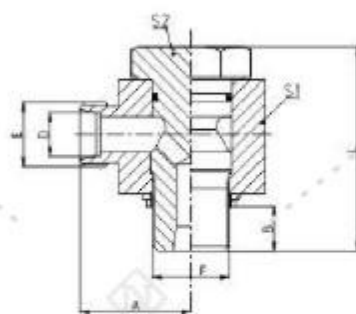


英制螺纹铰接接头
METRIC BANJO

1CI-BWD


1DI-BWD

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.	尺寸 DIMENSIONS					压力等级 MPa
	E	F		B	A	L	S1	S2	
1CI-12-B02WD	M12 × 1.5	G1/2	6	8.5	19	32.5	16	17	31.5 轻系列 L
1CI-14-B02WD	M14 × 1.5	G1/8	8	8.5	19	32.5	16	17	
1CI-16-B04WD	M16 × 1.5	G1/4	10	13	22.5	42	22	19	
1CI-18-B06WD	M18 × 1.5	G3/8	12	13	25	48	27	22	
1CI-22-B08WD	M22 × 1.5	G1/2	15	16.5	28.5	59	32	27	
1CI-26-B08WD	M26 × 1.5	G1/2	18	16.5	29	59	32	27	
1CI-30-B12WD	M30 × 1.5	G3/4	22	17.5	35	68.5	41	32	16 轻系列 L
1CI-36-B16WD	M36 × 1.5	G1	28	19.5	39.5	84	50	41	
1CI-45-B20WD	M45 × 2	G1.1/4	35	21.5	46.5	96	60	50	
1CI-52-B24WD	M52 × 2	G1.1/2	45	23.5	51.5	109	70	60	
1DI-14-B04WD	M14 × 1.5	G1/4	6	13	23.5	42	22	19	40 轻系列 S
1DI-16-B04WD	M16 × 1.5	G1/4	8	13	23.5	42	22	19	
1DI-18-B06WD	M18 × 1.5	G3/8	10	13	26	48	27	22	
1DI-20-B06WD	M20 × 1.5	G3/8	12	13	26	48	27	22	
1DI-22-B08WD	M22 × 1.5	G1/2	14	16.5	31	59	32	27	31.5 轻系列S
1DI-24-B08WD	M24 × 1.5	G1/2	16	16.5	31	59	32	27	
1DI-30-B12WD	M30 × 1.5	G3/4	20	17.5	37	68.5	41	32	25轻系列S
1DI-36-B16WD	M36 × 1.5	G1	25	19.5	43.5	84	50	41	
1DI-42-B20WD	M42 × 2	G1.1/4	30	21.5	50.5	96	60	50	16 轻系列S
1DI-52-B24WD	M52 × 2	G1.1/2	38	23.5	57.5	109	70	60	

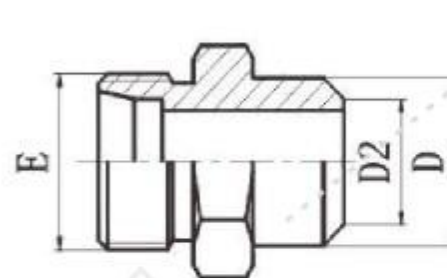

1CW

1DW

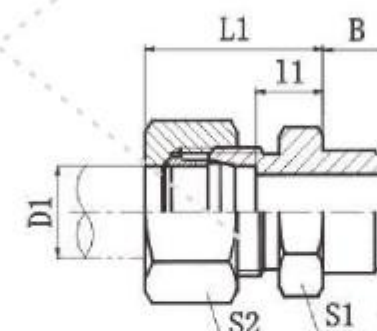

1CW-RN


1DW-RN




焊接接头
WELD FITTINGS

代 号 PART NO.	螺 纹 THREAD	管子外径 TUBE O.D.		尺 寸 DIMENSIONS						压力等级
	E	D1	D2	B	D	l1	L1	S1	S2	MPa
1CW-12-06	M12x1.5	6	6	7	10	7	22	12	14	31.5 轻系列 L
1CW-14-08	M14x1.5	8	8	8	12	8	23	14	17	
1CW-16-10	M16x1.5	10	10	8	14	9	24	17	19	
1CW-18-12	M18x1.5	12	12	8	16	10	25	19	22	
1CW-22-15	M22x1.5	15	15	10	19	11	26	22	27	
1CW-26-18	M26X1.5	18	18	10	22	11.5	28	27	32	
1CW-26-22	M26X1.5	18	22	10	27	13.5	28	27	32	16 轻系列 L
1CW-30-22	M30x2	22	22	12	27	13.5	30	32	36	
1CW-30-25	M30x2	22	25	12	31	13.5	30	32	36	
1CW-36-28	M36x2	28	28	12	32	16.5	33	38	41	
1CW-45-35	M45X2	35	35	14	40	14.5	36	46	50	
1CW-52-42	M52X2	42	42	16	46	16	39	55	60	
1DW-14-06	M14x1.5	6	6	7	11	11	26	14	17	63 重系列 S
1DW-16-08	M16x1.5	8	8	8	13	13	28	17	19	
1DW-18-10	M18x1.5	10	10	8	15	12.5	29	19	22	
1DW-20-12	M20x1.5	12	12	10	17	14.5	31	22	24	
1DW-22-14	M22x1.5	14	14	10	19	16	34	24	27	
1DW-24-16	M24x1.5	16	16	10	21	15.5	34	27	30	
1DW-30-20	M30x2	20	20	12	26	17.5	39	32	36	40 重系列 S
1DW-36-25	M36x2	25	25	12	31	20	44	41	46	
1DW-42-30	M42x2	30	30	14	36	20.5	47	46	50	
1DW-52-38	M52X2	38	38	16	44	23	54	55	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1DW-20-12RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1DW-20-12RN.

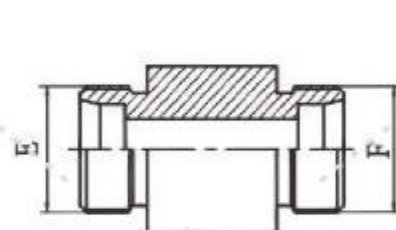

1C-Y
1D-Y

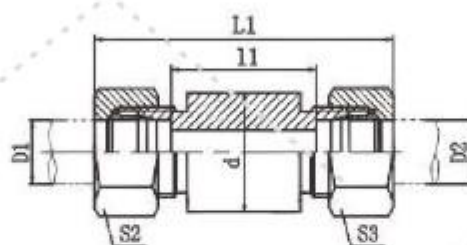


1C-Y/RN
1D-Y/RN




圆柱过板接头
CYLINDER STRAIGHT
BULKHEAD

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D.		尺寸 DIMENSIONS				压力等级 MPa
	E	F	D1	D2	l1	L1	d	S2,S3	
1C-12Y	M12X1.5	M12X1.5	6	6	56	85	18	14	31.5 轻系列 L
1C-14Y	M14X1.5	M14X1.5	8	8	56	85	20	17	
1C-16Y	M16X1.5	M16X1.5	10	10	58	87	22	19	
1C-18Y	M18X1.5	M18X1.5	12	12	58	87	25	22	
1C-22Y	M22X1.5	M22X1.5	15	15	70	100	28	27	
1C-26Y	M26X1.5	M26X1.5	18	18	69	101	32	32	
1C-30Y	M30X2	M30X2	22	22	73	105	36	36	16 轻系列 L
1C-36Y	M36X2	M36X2	28	28	73	106	40	41	
1C-45Y	M45X2	M45X2	35	35	71	114	50	50	
1C-52Y	M52X2	M52X2	42	42	70	115	60	60	
1D-14Y	M14X1.5	M14X1.5	6	6	60	89	20	17	63 重系列 S
1D-16Y	M16X1.5	M16X1.5	8	8	60	89	22	19	
1D-18Y	M18X1.5	M18X1.5	10	10	59	91	25	22	
1D-20Y	M20X1.5	M20X1.5	12	12	59	91	28	24	
1D-22Y	M22X1.5	M22X1.5	14	14	72	107	30	27	
1D-24Y	M24X1.5	M24X1.5	16	16	71	107	35	30	40 重系列 S
1D-30Y	M30X2	M30X2	20	20	71	114	38	36	
1D-36Y	M36X2	M36X2	25	25	72	120	45	46	
1D-42Y	M42X2	M42X2	30	30	73	126	50	50	
1D-52Y	M52X2	M52X2	38	38	72	133	60	60	31.5重系列S

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如1D-36Y/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 1D-36Y/RN.



5CB
5DB



5CB-RN
5DB-RN




英管内螺纹
BSPP FEMALE

代号 PART NO.	螺纹 THREAD		管子外径 TUBE O.D. D1	尺寸 DIMENSIONS					压力等级 MPa
	E	F		B	l1	L1	S1	S2	
5CB-12-02	M12X1.5	G1/8"X28	6	12	19	34	14	14	31.5 轻系列 L
5CB-12-04	M12X1.5	G1/4"X19	6	16	23	36	19	17	
5CB-14-06	M14X1.5	G3/8"X19	8	17	25	40	24	17	
5CB-14-08	M14X1.5	G1/2"X14	8	20	29	44	27	17	
5CB-16-04	M16X1.5	G1/4"X19	10	17	25	40	19	19	
5CB-16-06	M16X1.5	G3/8"X19	10	17	26	41	24	19	
5CB-16-08	M16X1.5	G1/2"X14	10	20	30	45	27	19	
5CB-18-04	M18X1.5	G1/4"X19	12	17	23	38	19	22	
5CB-18-06	M18X1.5	G3/8"X19	12	17	26	41	24	22	
5CB-18-08	M18X1.5	G1/2"X14	12	20	30	45	27	22	
5CB-22-06	M22X1.5	G3/8"X19	15	17	28	43	24	27	
5CB-22-08	M22X1.5	G1/2"X14	15	20	31	46	27	27	
5CB-26-08	M26X1.5	G1/2"X14	18	20	30.5	47	27	32	16 轻系列 L
5CB-30-12	M30X2	G3/4"X14	22	22	35.5	52	36	36	
5CB-36-16	M36X2	G1"X11	28	24.5	38	55	41	41	
5CB-45-20	M45X2	G1.1/4"X11	35	26.5	41	63	55	50	
5CB-52-24	M52X2	G1.1/2"X11	42	28.5	42.5	65	60	60	63 重系列 S
5DB-14-04	M14X1.5	G1/4"X19	6	17	26	41	19	17	
5DB-16-04	M16X1.5	G1/4"X19	8	17	26	41	19	19	
5DB-18-06	M18X1.5	G3/8"X19	10	17	26.5	43	24	22	
5DB-20-06	M20X1.5	G3/8"X19	12	17	27.5	28	24	24	
5DB-20-08	M20X1.5	G1/2"X14	12	20	30.5	31	24	24	
5DB-22-08	M22X1.5	G1/2"X14	14	20	32	50	30	27	40 重系列 S
5DB-24-08	M24X1.5	G1/2"X14	16	20	31.5	50	30	30	
5DB-30-12	M30X2	G3/4"X14	20	22	34.5	56	36	36	
5DB-36-16	M36X2	G1"X11	25	24.5	37.5	62	41	46	
5DB-42-20	M42X2	G1.1/4"X11	30	26.5	42	69	55	50	31.5重系列S
5DB-52-24	M52X2	G1.1/2"X11	38	28.5	43.5	74	60	60	

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如5CB-45-20RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 5CB-45-20RN.




5CB-G
5DB-G



铜垫密封英管压力表接头
BSP PRESSURE GAUGE CONNECTOR
WITH COPPER SEALING RING

代号 PART NO.	螺纹 E	管径 F	管子外径 TUBE O.D. D1	尺寸 l1	尺寸 B	尺寸 S1	尺寸 S2	密封铜垫 SEALING RING	压力等级 MPa
5CB-12-04G	M12X1.5	G1/4"X19	6	9	11	19	14	DP-B04G	31.5 轻系列 L
5CB-14-04G	M14X1.5	G1/4"X19	8	9	11	19	17	DP-B04G	
5CB-16-04G	M16X1.5	G1/4"X19	10	9	11	19	19	DP-B04G	
5CB-18-04G	M18X1.5	G1/4"X19	12	10	11	19	22	DP-B04G	
5DB-14-08G	M14X1.5	G1/2"X14	6	10	17	27	17	DP-B08G	63 重系列 S
5DB-16-08G	M16X1.5	G1/2"X14	8	10	17	27	19	DP-B08G	
5DB-18-08G	M18X1.5	G1/2"X14	10	10	17	27	22	DP-B08G	
5DB-20-08G	M20X1.5	G1/2"X14	12	9	17	27	24	DP-B08G	

注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如 5CB-18-04GRN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 5CB-18-04GRN.




7BC-GS 7BD-GS




铜垫密封英管压力表接头
BSPP PRESSURE GAUGE CONNECTOR
WITH COPPER SEALING RING

代号 PART NO.	螺纹 E	管径 F	管子外径 TUBE O.D. D1	尺寸 l1	尺寸 L	尺寸 S1	尺寸 S2	密封铜垫 SEALING RING	压力等级 MPa
7BC-04-12GS	G1/4"X19	M12X1.5	6	11	30.5	19	14	DP-B04G	31.5 轻系列 L
7BC-04-14GS	G1/4"X19	M14X1.5	8	11	31	19	17	DP-B04G	
7BC-04-16GS	G1/4"X19	M16X1.5	10	11	31	19	19	DP-B04G	
7BC-04-18GS	G1/4"X19	M18X1.5	12	11	32	19	22	DP-B04G	
7BD-04-14GS	G1/4"X19	M14X1.5	6	11	31	19	17	DP-B04G	63 重系列 S
7BD-04-16GS	G1/4"X19	M16X1.5	8	11	31	19	19	DP-B04G	
7BD-04-18GS	G1/4"X19	M18X1.5	10	11	31.5	19	22	DP-B04G	
7BD-04-20GS	G1/4"X19	M20X1.5	12	11	31	19	24	DP-B04G	
7BD-08-14GS	G1/2"X14	M14X1.5	6	17	39	27	17	DP-B08G	63 重系列 S
7BD-08-16GS	G1/2"X14	M16X1.5	8	17	39	27	19	DP-B08G	
7BD-08-18GS	G1/2"X14	M18X1.5	10	17	38.5	27	22	DP-B08G	
7BD-08-20GS	G1/2"X14	M20X1.5	12	17	39	27	24	DP-B08G	

注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如 7BC-04-18GRN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 7BC-04-18GRN.

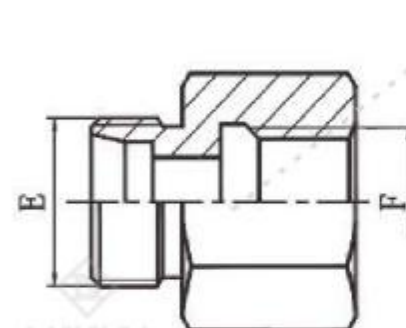

5CM
5DM

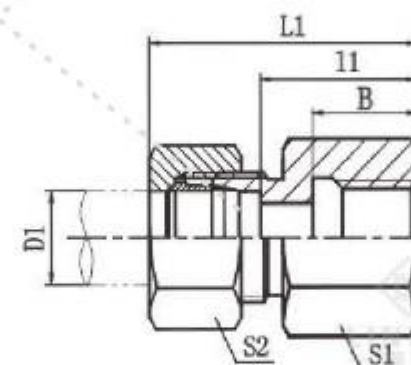


5CM-RN
5DM-RN



公制内螺纹
METRIC FEMALE

代号 PART NO.	螺纹 E	管径 F	管子外径 TUBE O.D. D1	尺寸 B	尺寸 l1	尺寸 L1	尺寸 S1	尺寸 S2	压力等级 MPa
5CM-12-10	M12X1.5	M10X1	6	12.5	19.5	34	14	14	25 轻系列 L
5CM-14-12	M14X1.5	M12X1.5	8	17	24	39	17	17	
5CM-16-14	M16X1.5	M14X1.5	10	17	25	40	19	19	
5CM-18-16	M18X1.5	M16X1.5	12	17	26	41	22	22	
5CM-22-18	M22X1.5	M18X1.5	15	17	28	43	24	27	16 轻系列 L
5CM-26-22	M26X1.5	M22X1.5	18	19	29.5	46	30	32	
5CM-30-26	M30X2	M26X1.5	22	21	34.5	51	32	36	
5CM-36-33	M36X2	M33X2	28	24	37.5	54	41	41	
5CM-45-42	M45X2	M42X2	35	26	40.5	62	55	50	63 重系列 S
5CM-52-48	M52X2	M48X2	42	28	42	65	60	60	
5DM-14-12	M14X1.5	M12X1.5	6	17	26	41	17	17	
5DM-16-14	M16X1.5	M14X1.5	8	17	26	41	19	19	
5DM-18-16	M18X1.5	M16X1.5	10	17	26.5	43	22	22	40 重系列 S
5DM-20-18	M20X1.5	M18X1.5	12	17	27.5	44	24	24	
5DM-22-20	M22X1.5	M20X1.5	14	19	31	49	27	27	
5DM-24-22	M24X1.5	M22X1.5	16	19	30.5	49	30	30	
5DM-30-27	M30X2	M27X2	20	22	34.5	56	36	36	31.5重系列S
5DM-36-33	M36X2	M33X2	25	24	37	61	41	46	
5DM-42	M42X2	M42X2	30	26	41.5	68	55	50	
5DM-52-48	M52X2	M48X2	38	28	43	74	60	60	


注：如需带卡套及卡套螺母整套订货，则在代号后加“RN”，如 5DM-30-27RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part no., for example 5DM-30-27RN.

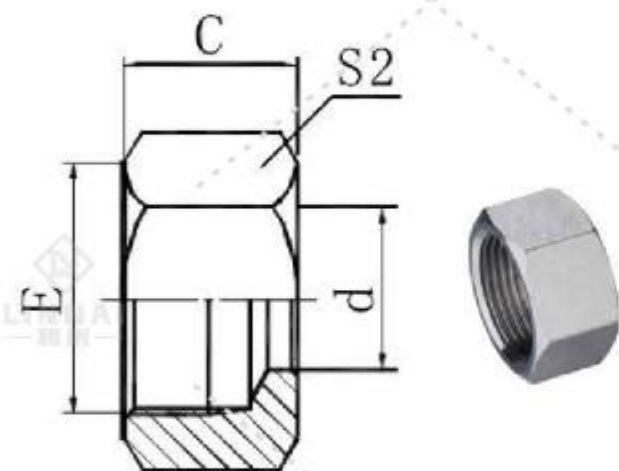

NL
NS

卡套螺母
RETAINING NUTS


代号 PART NO.	螺 纹 THREAD	管子外径 TUBE O.D	尺 寸 DIMENSIONS				压力等级 MPa
	E		对应卡套	C	d	S1	
NL-12	M12X1.5	6	SI-RLS-06	14.5	6	14	轻系列L
NL-14	M14X1.5	8	SI-RLS-08	14.5	8	17	
NL-16	M16X1.5	10	SI-RLS-10	15.5	10	19	
NL-18	M18X1.5	12	SI-RLS-12	15.5	12	22	
NL-22	M22X1.5	15	SI-RLS-15	17	15	27	
NL-26	M26X1.5	18	SI-RL-18	18	18	32	
NL-30	M30X2	22	SI-RL-22	20	22	36	
NL-36	M36X2	28	SI-RL-28	21	28	41	
NL-45	M45X2	35	SI-RL-35	24	35	50	
NL-52	M52X2	42	SI-RL-42	24	42	60	
NS-14	M14X1.5	6	SI-RLS-06	16.5	6	17	重系列S
NS-16	M16X1.5	8	SI-RLS-08	16.5	8	19	
NS-18	M18X1.5	10	SI-RLS-10	17.5	10	22	
NS-20	M20X1.5	12	SI-RLS-12	17.5	12	24	
NS-22	M22X1.5	14	SI-RS-14	20.5	14	27	
NS-24	M24X1.5	16	SI-RS-16	20.5	16	30	
NS-30	M30X2	20	SI-RS-20	24	20	36	
NS-36	M36X2	25	SI-RS-25	27	25	46	
NS-42	M42X2	30	SI-RS-30	29	30	50	
NS-52	M52X2	38	SI-RS-38	32.5	38	60	

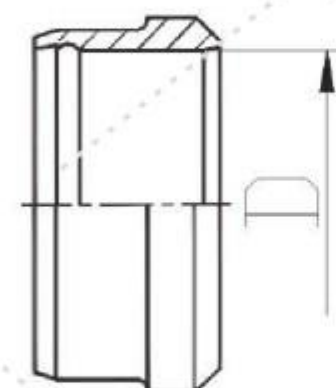

RL
RS

卡套
CUTTING RING


代 号 PART NO.	管子外径D TUBE O.D.	对应卡 套螺母	尺 寸 DIMENSIONS	备注	
SI-RLS-06	6	NL-12	与重系列相应规格一致	轻系 L 列	
SI-RLS-08	8	NL-14			
SI-RLS-10	10	NL-16			
SI-RLS-12	12	NL-18			
SI-RL-15	15	NL-22	与重系列相应规格一致		轻系 L 列
SI-RL-18	18	NL-26			
SI-RL-22	22	NL-30			
SI-RL-28	28	NL-36			
SI-RL-35	35	NL-45			
SI-RL-42	42	NL-52			
SI-RLS-06	6	NS-14	与重系列相应规格一致	重系 S 列	
SI-RLS-08	8	NS-16			
SI-RLS-10	10	NS-18			
SI-RLS-12	12	NS-20			
SI-RS-14	14	NS-22			
SI-RS-16	16	NS-24			
SI-RS-20	20	NS-30			
SI-RS-25	25	NS-36			
SI-RS-30	30	NS-42			
SI-RS-38	38	NS-52			

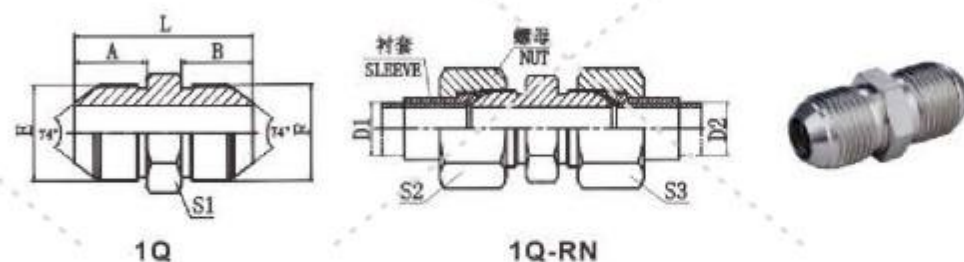

公制外螺纹74° 外锥
METRIC MALE 74° CONE

代号 PART NO.	螺纹 THREAD E	螺纹 THREAD F	管子外径 TUBE O.D. D1,D2	尺寸 DIMENSIONS				
				A	B	L	S1	S2, S3
1Q-10	M10X1	M10X1	5	12	12	30	12	14
1Q-12	M12X1.5	M12X1.5	6	15.7	15.7	37.5	14	14
1Q-14	M14X1.5	M14X1.5	8	17	17	40	17	17
1Q-16	M16X1.5	M16X1.5	10	18	18	42	17	19
1Q-18	M18X1.5	M18X1.5	12	18	18	42	19	22
1Q-24	M24X1.5	M24X1.5	16	20	20	50	27	30
1Q-27	M27X1.5	M27X1.5	19	20	20	50	30	32
1Q-30	M30X1.5	M30X1.5	20	23	23	57	32	36
1Q-30E	M30X2	M30X2	20	26	26	63	32	36
1Q-33	M33X2	M33X2	22	26	26	63	36	38
1Q-36	M36X2	M36X2	25	26	26	63	38	41
1Q-39	M39X2	M39X2	28	26	26	65	41	46
1Q-42	M42X2	M42X2	32	28.5	28.5	70	46	50
1Q-45	M45X2	M45X2	34	28.5	28.5	70	46	55


注：如需带衬套及螺母整套订货，则请在代号后加“RN”，如1Q-18RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 1Q-18RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.

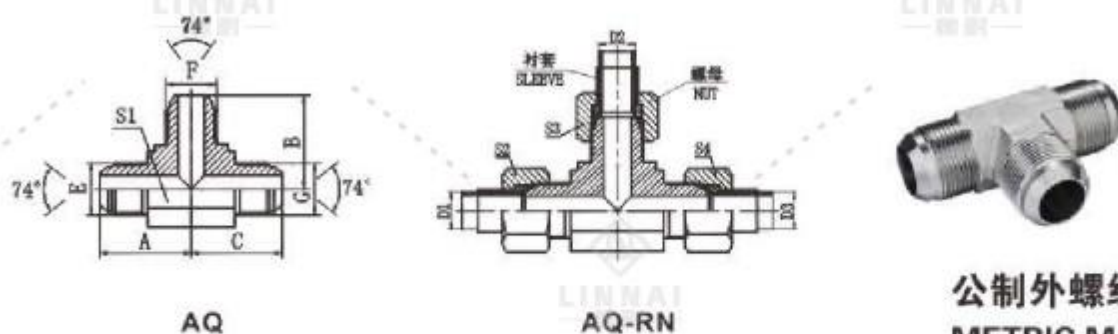

公制外螺纹74° 外锥三通
METRIC MALE 74° CONE TEE

代号 PART NO.	螺纹 THREAD E	螺纹 THREAD F	螺纹 THREAD G	管子外径 TUBE O.D. D1,D2,D3	尺寸 DIMENSIONS				
					A	B	C	S1	S2,S3,S4
AQ-14	M14X1.5	M14X1.5	M14X1.5	8	27	27	27	14	17
AQ-16	M16X1.5	M16X1.5	M16X1.5	10	29.5	29.5	29.5	16	19
AQ-18	M18X1.5	M18X1.5	M18X1.5	12	34	34	34	19	22
AQ-22	M22X1.5	M22X1.5	M22X1.5	14	37.5	37.5	37.5	22	27
AQ-27	M27X1.5	M27X1.5	M27X1.5	18	41.5	41.5	41.5	27	32
AQ-33	M33X2	M33X2	M33X2	22	49.5	49.5	49.5	33	38


注：如需带衬套及螺母整套订货，则请在代号后加“RN”，如AQ-18RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example AQ-18RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.

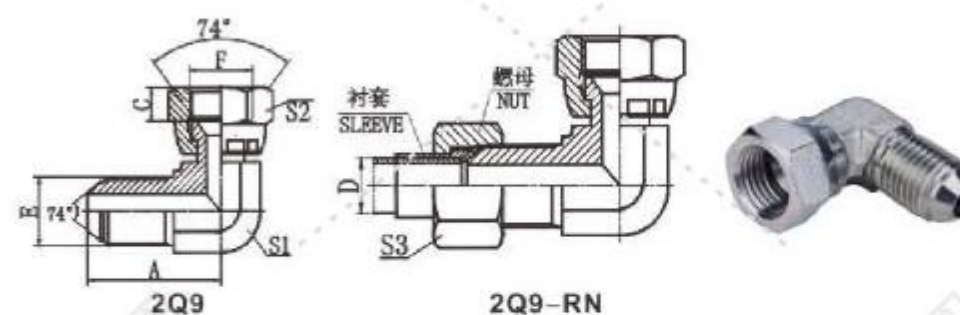

公制外螺纹74° 外锥
公制内螺纹74° 内锥
METRIC MALE 74° CONE
METRIC FEMALE 74° SEAT

代号 PART NO.	螺纹 THREAD E	螺纹 THREAD F	管子外径 TUBE O.D. D	尺寸 DIMENSIONS				
				A	C	S1	S2	S3
2Q9-14	M14X1.5	M14X1.5	8	30.2	8.5	14	19	17
2Q9-16	M16X1.5	M16X1.5	10	32.5	8	16	22	19
2Q9-18	M18X1.5	M18X1.5	12	34	8	19	24	22
2Q9-22	M22X1.5	M22X1.5	14	37.5	10	22	27	27
2Q9-27	M27X1.5	M27X1.5	18	41.5	10	27	32	32
2Q9-33	M33X2	M33X2	22	49.5	13	33	41	38
2Q9-36	M36X2	M36X2	25	51.5	13	36	41	41
2Q9-39	M39X2	M39X2	28	55.5	13	41	46	46
2Q9-45	M45X2	M45X2	34	62.5	15	48	55	55


注：如需带衬套及螺母整套订货，则请在代号后加“RN”，如2Q9-18RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 2Q9-18RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.

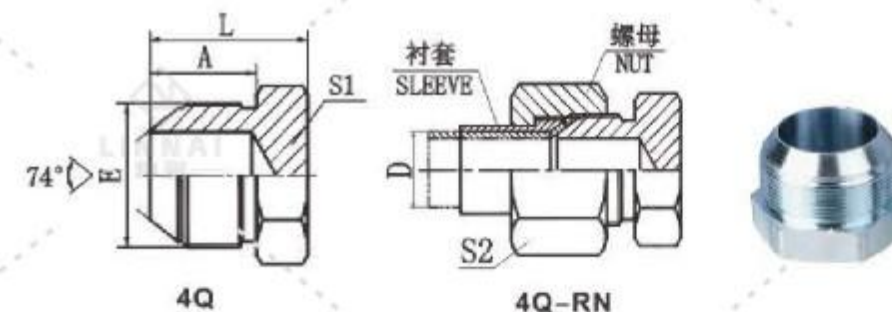

公制外螺纹74° 外锥堵头
METRIC MALE 74° CONE PLUG

代号 PART NO.	螺纹 THREAD E	管子外径 TUBE O.D. D	尺寸 DIMENSIONS			
			A	L	S1	S2
4Q-10	M10X1	5	12	18	12	14
4Q-12	M12X1.5	6	15.7	21.5	14	14
4Q-14	M14X1.5	8	17	23	17	17
4Q-16	M16X1.5	10	18	24	17	19
4Q-18	M18X1.5	12	18	24	19	22
4Q-24	M24X1.5	16	20	30	27	30
4Q-27	M27X1.5	18	20	30	30	32
4Q-30	M30X1.5	20	23	34	32	36
4Q-30E	M30X2	20	26	37	32	36
4Q-33	M33X2	22	26	37	36	38
4Q-36	M36X2	25	26	38	38	41
4Q-39	M39X2	28	26	39	41	46
4Q-42	M42X2	32	28.5	41.5	46	50
4Q-45	M45X2	34	28.5	41.5	46	55

注：如需带衬套及螺母整套订货，则请在代号后加“RN”，如4Q-18RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 4Q-18RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.

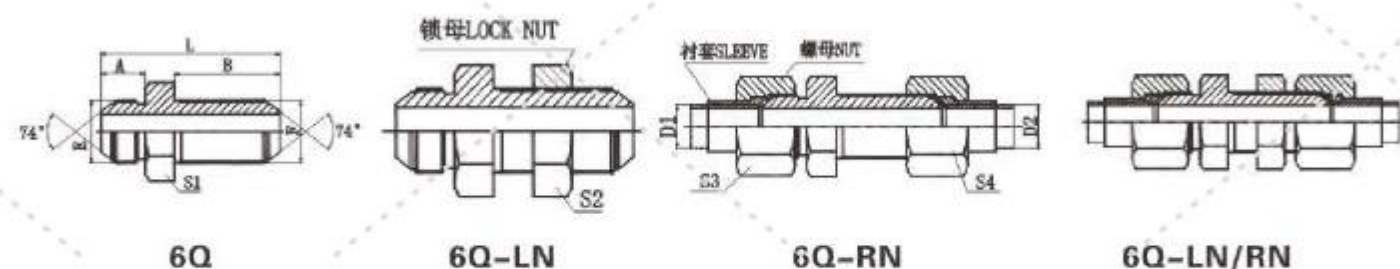


公制外螺纹74° 外锥过板接头
METRIC MALE 74° CONE BULKHEAD

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS					
	E	F		D1, D2	A	B	L	S1	S2, S3, S4
6Q-10	M10X1	M10X1	5	12.5	34	52.5	14	14	14
6Q-12	M12X1.5	M12X1.5	6	15.7	38	59.7	17	17	14
6Q-16	M16X1.5	M16X1.5	10	18	41	65	19	22	19
6Q-18	M18X1.5	M18X1.5	12	18	43	69	24	24	22
6Q-22	M22X1.5	M22X1.5	14	19.5	44	73.5	27	27	27
6Q-24	M24X1.5	M24X1.5	16	20	45	75	27	30	30
6Q-27	M27X1.5	M27X1.5	18	20	48	78	30	32	32
6Q-30	M30X1.5	M30X1.5	20	23	53	87	34	36	36
6Q-33	M33X2	M33X2	22	26	55	92	36	41	38
6Q-36	M36X2	M36X2	25	25	56	94	41	41	41
6Q-39	M39X2	M39X2	28	26	58	97	41	46	46
6Q-42	M42X2	M42X2	32	28.5	59	102.5	50	50	50
6Q-45	M45X2	M45X2	34	28.5	60	103.5	50	50	55

注：如需带锁母订货，则在代号后加“LN”，如6Q-18LN；如需带衬套及螺母整套订货，则在代号后加“RN”，如6Q-18RN；如需带锁母、衬套及螺母订货，在代号后加“LN/RN”，如6Q-18LN/RN；衬套代号NB500-Q，螺母代号NB200-Q，锁母代号8C。

Note: In case if you are interested to order the adapter with lock nut, please insert suffix "LN" after our part no., for example 6Q-18LN; order the adapter with sleeve and nut, please insert suffix "RN" after our part no., for example 6Q-18RN; order the adapter with lock nut and sleeve and nut, insert suffix "LN/RN" after part no., for example 6Q-18LN/RN; The sleeve NO. is NB500-Q and the nut NO. is NB200-Q and the lock nut no. is 8C.

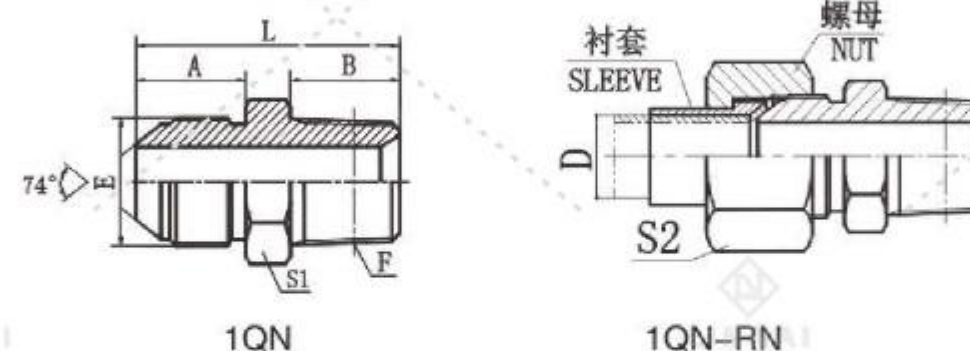


公制外螺纹74° 外锥/布锥管外螺纹
METRIC MALE 74° CONE/NPT MALE


代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
1QN-12-02	M12X1.5	Z1/8"X27	6	15.7	10.5	32	14	14
1QN-12-04	M12X1.5	Z1/4"X18	6	15.7	15	36.5	14	14
1QN-14-02	M14X1.5	Z1/8"X27	8	17	10.5	33	17	17
1QN-14-04	M14X1.5	Z1/4"X18	8	17	15	38	17	17
1QN-16-04	M16X1.5	Z1/4"X18	10	18	15	39	17	19
1QN-18-04	M18X1.5	Z1/4"X18	12	18	15	39	19	22
1QN-18-06	M18X1.5	Z3/8"X18	12	18	16	40	19	22
1QN-18-08	M18X1.5	Z1/2"X14	12	18	19.5	45.5	22	22
1QN-22-06	M22X1.5	Z3/8"X18	14	19.5	16	43.5	24	27
1QN-22-08	M22X1.5	Z1/2"X14	14	19.5	19.5	47	24	27
1QN-27-06	M27X1.5	Z3/8"X18	18	20	16.5	46	30	32
1QN-27-08	M27X1.5	Z1/2"X14	18	20	19.5	49.5	30	32
1QN-27-12	M27X1.5	Z3/4"X14	18	20	19.5	49.5	30	32
1QN-27-16	M27X1.5	Z1"X11.5	18	20	25.5	56.5	36	32
1QN-30-12	M30X1.5	Z3/4"X14	20	23	19.5	53.5	32	36
1QN-33-12	M33X2	Z3/4"X14	22	26	19.5	56.5	36	38
1QN-36-16	M36X2	Z1"X11.5	25	26	25.5	63	41	41
1QN-39-16	M39X2	Z1"X11.5	28	26	25.5	64.5	41	46
1QN-45-16	M45X2	Z1"X11.5	34	28.5	25.5	67	46	55
1QN-45-20	M45X2	Z1.1/4"X11.5	34	28.5	26.5	68	46	55
1QN-45-24	M45X2	Z1.1/2"X11.5	34	28.5	27.5	71	50	55
1QN-52-20	M52X2	Z1.1/4"X11.5	42	30	26.5	71.5	55	60

注：如需带衬套及螺母整套订货，则在代号后加“RN”，如1QN-22-08RN，衬套代号NB500-Q，螺母代号NB200-Q。

Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 1QN-22-08RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.

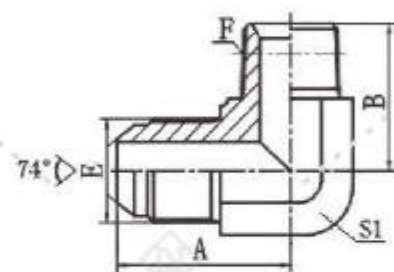

1QN9

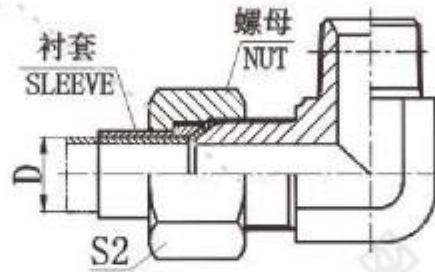


1QN9-RN




90° 弯公制外螺纹74° 外锥/ 布锥管外螺纹
90° ELBOW METRIC MALE 74° CONE / NPT MALE

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS			
	E	F		A	B	S1	S2
1QN9-12-02	M12X1.5	Z1/8"X27	6	25.5	21	11	14
1QN9-12-04	M12X1.5	Z1/4"X18	6	28	25.5	14	14
1QN9-14-02	M14X1.5	Z1/8"X27	8	30.2	23.5	14	17
1QN9-14-04	M14X1.5	Z1/4"X18	8	30.2	25.5	14	17
1QN9-16-04	M16X1.5	Z1/4"X18	10	32	26.5	16	19
1QN9-16-08	M16X1.5	Z1/2"X14	10	36	36.7	22	19
1QN9-18-04	M18X1.5	Z1/4"X18	12	34	28.7	19	22
1QN9-18-06	M18X1.5	Z3/8"X18	12	34	31	19	22
1QN9-22-06	M22X1.5	Z3/8"X18	14	37.5	32.5	22	27
1QN9-22-08	M22X1.5	Z1/2"X14	14	37.5	36.7	22	27
1QN9-27-08	M27X1.5	Z1/2"X14	18	41.5	40	27	32
1QN9-27-12	M27X1.5	Z3/4"X14	18	41.5	44	27	32
1QN9-27-16	M27X1.5	Z1"X11.5	18	45	49	33	32
1QN9-30-12	M30X1.5	Z3/4"X14	20	45.8	45	30	36
1QN9-36-16	M36X2	Z1"X11.5	25	51.5	51.5	36	41
1QN9-39-16	M39X2	Z1"X11.5	28	55.5	54.5	41	46
1QN9-42-20	M42X2	Z1.1/4"X11.5	32	57	54.5	41	50
1QN9-45-16	M45X2	Z1"X11.5	34	62.5	58.5	48	55
1QN9-45-20	M45X2	Z1.1/4"X11.5	34	62.5	58.5	48	55
1QN9-45-24	M45X2	Z1.1/2"X11.5	34	62.5	63	48	55

注：如需带衬套及螺母整套订货，则在代号后加“RN”，如1QN9-22-08RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 1QN9-22-08RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.



1QT-SP

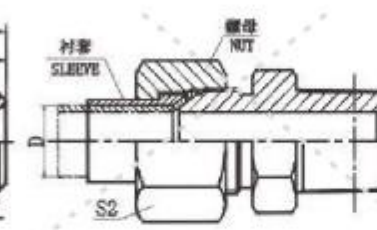


1QT-SP/RN




公制外螺纹74° 外锥
英锥管外螺纹METRIC MALE 74°
CONE/ BSPT MALE

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
1QT-10-02SP	M10X1	R1/8"X28	5	12	10	28	12	14
1QT-14-04SP	M14X1.5	R1/4"X19	8	17	14.5	37.5	17	17
1QT-14-06SP	M14X1.5	R3/8"X19	8	17	15	38	17	17
1QT-16-04SP	M16X1.5	R1/4"X19	10	18	14.5	38.5	17	19
1QT-16-06SP	M16X1.5	R3/8"X19	10	18	15	39	17	19
1QT-18-06SP	M18X1.5	R3/8"X19	12	18	15	39	19	22
1QT-22-08SP	M22X1.5	R1/2"X14	14	19.5	20	47.5	24	27
1QT-27-08SP	M27X1.5	R1/2"X14	18	20	20	50	30	32
1QT-27-12SP	M27X1.5	R3/4"X14	18	20	20	50	30	32
1QT-30-12SP	M30X1.5	R3/4"X14	20	23	20	54	32	36
1QT-33-12SP	M33X2	R3/4"X14	22	26	20	57	36	38
1QT-36-16SP	M36X2	R1"X11	25	26	25.5	61.5	38	41
1QT-39-16SP	M39X2	R1"X11	28	26	25.5	64.5	41	46
1QT-45-20SP	M45X2	R1.1/4"X11	34	28.5	26.5	68	46	55

注：如需带衬套及螺母整套订货，则在代号后加“RN”，如1QT-22-08SP/RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 1QT-22-08SP/RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.



1QT9-SP




1QT9-SP/RN



90° 弯公制外螺纹74° 外锥
英锥管外螺纹
90° ELBOW METRIC MALE 74°
CONE / BSPT MALE

代号 PART NO.	螺 纹 THREAD		管子外径 TUBE O.D.	尺 寸 DIMENSIONS			
	E	F		A	B	S1	S2
1QT9-14-04SP	M14X1.5	R1/4"X19	8	30.2	25.5	14	17
1QT9-16-04SP	M16X1.5	R1/4"X19	10	32	26.5	16	19
1QT9-18-06SP	M18X1.5	R3/8"X19	12	34	29	19	22
1QT9-18-08SP	M18X1.5	R1/2"X14	12	36	36	22	22
1QT9-22-08SP	M22X1.5	R1/2"X14	14	37.5	36	22	27
1QT9-27-12SP	M27X1.5	R3/4"X14	18	41.5	44	27	32
1QT9-30-12SP	M30X1.5	R3/4"X14	20	45.8	45.5	30	36
1QT9-33-12SP	M33X2	R3/4"X14	22	49.5	47.5	33	38
1QT9-36-16SP	M36X2	R1"X11	25	51.5	52	36	41
1QT9-39-16SP	M39X2	R1"X11	28	55.5	55.2	41	46
1QT9-45-20SP	M45X2	R1.1/4"X11	34	62.5	61	48	55


注：如需带衬套及螺母整套订货，则在代号后加“RN”，如1QT9-22-08SP/RN，衬套代号NB500-Q，螺母代号NB200-Q。
Note: In case if you are interested to order the adapter in complete set with sleeve and nut, it is necessary to insert suffix "RN" after our part no., for example 1QT9-22-08SP/RN, The sleeve NO. is NB500-Q and the nut NO. is NB200-Q.



NB200-Q

公制74° 锥扩口式管接头螺母GB/T 5647
METRIC 74° CONE FLARED NUT GB/T 5647


代号 PART NO.	螺纹 THREAD	管子外径TUBE O.D.	尺寸 DIMENSIONS	
	E	mm	L	S2
NB200-10Q	M10X1	5	13.5	14
NB200-12Q	M12X1.5	6	16.5	14
NB200-14Q	M14X1.5	8	18.5	17
NB200-16Q	M15X1.5	10	19.5	19
NB200-22Q	M22X1.5	14	19.5	27
NB200-24Q	M24X1.5	16	20	30
NB200-27Q	M27X1.5	18	20	32
NB200-30Q	M30X1.5	20	24.5	36
NB200-30EQ	M30X2	20	24.5	36
NB200-33Q	M33X2	22	25.5	38
NB200-36Q	M35X2	25	26	41
NB200-39Q	M39X2	28	27.5	46
NB200-42Q	M42X2	32	28.5	50
NB200-45Q	M45X2	34	29	55



NB500-Q

公制74° 锥扩口式管接头衬套GB/T 5646
METRIC 74° CONE FLARED SLEEVE GB/T 5646


代号 PART NO.	管子外径 TUBE O.D.	尺寸 DIMENSIONS		配用螺母 NUT
		D	L	
NB500-05Q	5	8.7	10	NB200-10Q
NB500-06Q	6	10.3	11	NB200-12Q
NB500-08Q	8	12.1	12	NB200-14Q
NB500-10Q	10	14.1	13	NB200-16Q
NB500-14Q	14	20.1	15	NB200-22Q
NB500-16Q	16	22.1	16	NB200-24Q
NB500-18Q	18	25.1	17	NB200-27Q
NB500-20Q	20	28.1	18	NB200-30Q、NB200-30EQ
NB500-22Q	22	30.5	20	NB200-33Q
NB500-25Q	25	33.5	20	NB200-36Q
NB500-28Q	28	36.5	22	NB200-39Q
NB500-32Q	32	39.5	23	NB200-42Q
NB500-34Q	34	42.5	23	NB200-45Q

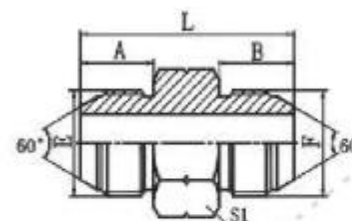

1S

日本英管外螺纹60° 外锥
JIS GAS MALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1S-02	G1/8"X28	G1/8"X28	12	12	30	14
1S-04	G1/4"X19	G1/4"X19	16	16	38	17
1S-06	G3/8"X19	G3/8"X19	18	18	42	19
1S-08	G1/2"X14	G1/2"X14	20	20	48	22
1S-12	G3/4"X14	G3/4"X14	22	22	54	30
1S-16	G1"X11	G1"X11	24	24	59	36
1S-20	G1.1/4"X11	G1.1/4"X11	27	27	67	46
1S-24	G1.1/2"X11	G1.1/2"X11	27	27	69	50
1S-32	G2"X11	G2"X11	30	30	77	65



4S

日本英管外螺纹60° 外锥堵头
JIS GAS MALE 60° CONE

代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS			
	E	A	L	S1	
4S-02	G1/8"X28	12	18	14	
4S-04	G1/4"X19	16	24	17	
4S-06	G3/8"X19	18	24	19	
4S-08	G1/2"X14	20	28	22	
4S-12	G3/4"X14	22	32	30	
4S-16	G1"X11	24	35	36	
4S-20	G1.1/4"X11	27	40	46	
4S-24	G1.1/2"X11	27	42	50	
4S-32	G2"X11	30	47	65	

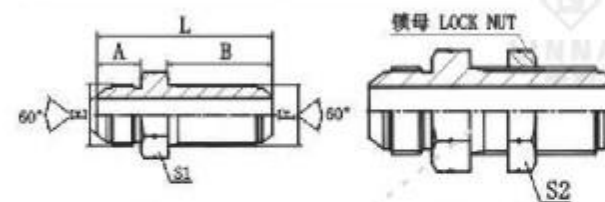

6S


6S-LN



日本英管外螺纹60° 外锥过板接头
JIS GAS MALE 60 CONE BULKHEAD

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
6S-04	G1/4"X19	G1/4"X19	16	32	56	19	19
6S-06	G3/8"X19	G3/8"X19	18	36	62	22	22
6S-08	G1/2"X14	G1/2"X14	20	40	70	27	27
6S-12	G3/4"X14	G3/4"X14	22	41	74	32	32

注：如需带锁母整套订货，则请在代号后加“LN”，如6S-16LN，锁母代号为8B。 Note: In case if you are interested to order the adaptor in complete set with lock nut, it is necessary to insert suffix "LN" after our part no., for example 6S-16LN, The lock nut no. is 8B.

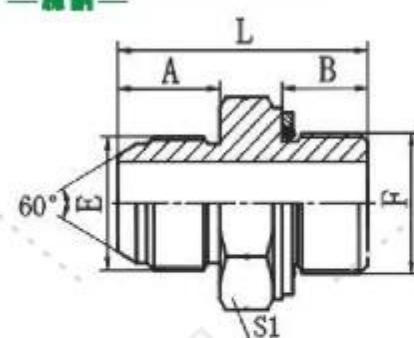


1SG

日本英管外螺纹60° 外锥/ 英管外螺纹O形圈
JIS GAS MALE 60° CONE / BSPP MALE O-RING

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1SG-02	G1/8"X28	G1/8"X28	O011	12	9.5	29	14
1SG-04	G1/4"X19	G1/4"X19	O111	16	11	33.5	19
1SG-06	G3/8"X19	G3/8"X19	O113	18	11.5	37.5	22
1SG-08	G1/2"X14	G1/2"X14	O115	20	14	44	27
1SG-12	G3/4"X14	G3/4"X14	O119	22	15.5	48.5	32
1SG-20	G1.1/4"X11	G1.1/4"X11	O222	27	20	59	50
1SG-24	G1.1/2"X11	G1.1/2"X11	O224	27	21.5	62.5	55

注： F端与DIN 3852油口相配。 F end is connected with DIN 3852 port.

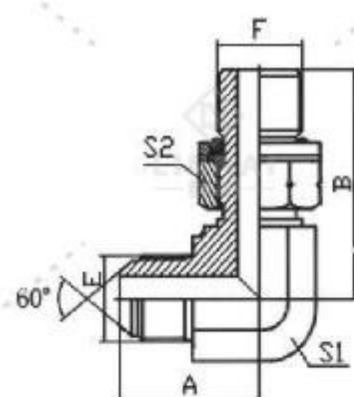


1SG9-OG

90° 弯日本英管外螺纹60° 外锥/
英管外螺纹O形圈可调向柱端
90° ELBOW JIS GAS MALE 60° CONE /
BSPP MALE O-RING ADJUSTABLE STUD END

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	S1	S2
1SG9-02OG	G1/8"X28	G1/8"X28	O011	21.8	26.2	11	14
1SG9-04OG	G1/4"X19	G1/4"X19	O111	28	31.3	14	19
1SG9-06OG	G3/8"X19	G3/8"X19	O113	29	35.8	16	22
1SG9-08OG	G1/2"X14	G1/2"X14	O115	38	43.2	22	27
1SG9-12OG	G3/4"X14	G3/4"X14	O119	43	49.3	27	32
1SG9-20OG	G1.1/4"X11	G1.1/4"X11	O222	57	59	41	50
1SG9-24OG	G1.1/2"X11	G1.1/2"X11	O224	61	65	48	55

注： F端与DIN 3852油口相配。 F end is connected with DIN 3852 port.

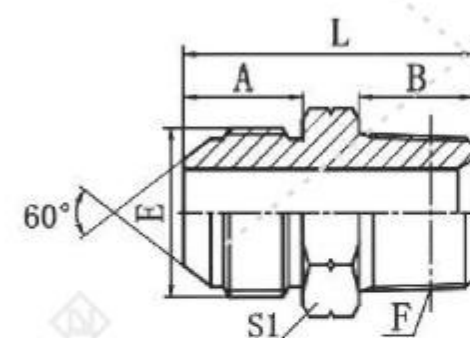


1ST-SP

日本英管外螺纹60° 外锥/ 英锥管外螺纹
JIS GAS MALE 60° CONE / BSPT MALE



代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1ST-02SP	G1/8"X28	R1/8"X28	12	10	28	14
1ST-02-04SP	G1/8"X28	R1/4"X19	12	14.5	32.5	17
1ST-04SP	G1/4"X19	R1/4"X19	16	14.5	36.5	17
1ST-04-02SP	G1/4"X19	R1/8"X28	16	10	32	17
1ST-04-06SP	G1/4"X19	R3/8"X19	16	15	37	19
1ST-04-08SP	G1/4"X19	R1/2"X14	16	20	44	22
1ST-06SP	G3/8"X19	R3/8"X19	18	15	39	19
1ST-06-04SP	G3/8"X19	R1/4"X19	18	14.5	40.5	22
1ST-06-08SP	G3/8"X19	R1/2"X14	18	20	46	22
1ST-08SP	G1/2"X14	R1/2"X14	20	20	48	22
1ST-08-04SP	G1/2"X14	R1/4"X19	20	14.5	42.5	22
1ST-08-06SP	G1/2"X14	R3/8"X19	20	15	45	27
1ST-08-12SP	G1/2"X14	R3/4"X14	20	20	50	27
1ST-12SP	G3/4"X14	R3/4"X14	22	20	53	30
1ST-12-08SP	G3/4"X14	R1/2"X14	22	20	52	30
1ST-12-16SP	G3/4"X14	R1"X11	22	25.5	58.5	36
1ST-16SP	G1"X11	R1"X11	24	25.5	62.5	41
1ST-16-12SP	G1"X11	R3/4"X14	24	20	57	41
1ST-20SP	G1.1/4"X11	R1.1/4"X11	27	26.5	66	46
1ST-24SP	G1.1/2"X11	R1.1/2"X11	27	26.5	67.5	50
1ST-32SP	G2"X11	R2"X11	30	30	77	65

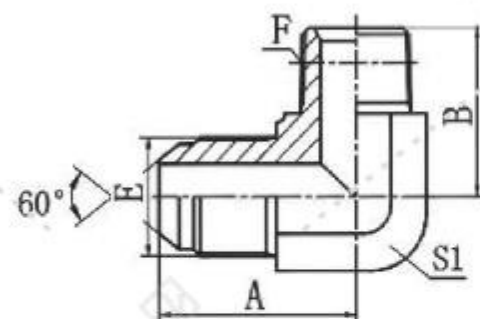


1ST9-SP

90° 弯日本英管外螺纹60° 外锥/ 英锥管外螺纹
90° ELBOW JIS GAS MALE 60° CONE / BSPT MALE




代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
1ST9-02SP	G1/8"X28	R1/8"X28	21.8	21	11
1ST9-02-04SP	G1/8"X28	R1/4"X19	24.3	25.5	14
1ST9-04SP	G1/4"X19	R1/4"X19	29	25.5	14
1ST9-04-02SP	G1/4"X19	R1/8"X28	29	23.5	14
1ST9-04-06SP	G1/4"X19	R3/8"X19	30	28.5	16
1ST9-06SP	G3/8"X19	R3/8"X19	31.5	28.5	16
1ST9-06-04SP	G3/8"X19	R1/4"X19	31.5	26.5	16
1ST9-06-08SP	G3/8"X19	R1/2"X14	36	36	22
1ST9-08SP	G1/2"X14	R1/2"X14	38	36	22
1ST9-08-06SP	G1/2"X14	R3/8"X19	38	32.5	22
1ST9-08-12SP	G1/2"X14	R3/4"X14	41	43.5	27
1ST9-12SP	G3/4"X14	R3/4"X14	43	43.5	27
1ST9-12-08SP	G3/4"X14	R1/2"X14	43	39.5	27
1ST9-12-16SP	G3/4"X14	R1"X11	47	50	33
1ST9-16SP	G1"X11	R1"X11	48.5	50	33
1ST9-20SP	G1.1/4"X11	R1.1/4"X11	57	56.5	41
1ST9-24SP	G1.1/2"X11	R1.1/2"X11	61	62.5	48
1ST9-32SP	G2"X11	R2"X11	73.2	74.2	63

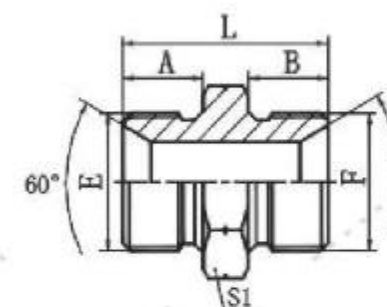

1B

英管外螺纹60° 内锥或六角端面用组合垫密封
BSPP MALE DOUBLE USE FOR 60° SEAT
OR BONDED SEAL


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1B-02	G1/8"X28	G1/8"X28	10	10	26	14
1B-02-04	G1/8"X28	G1/4"X19	10	12	28	19
1B-02-06	G1/8"X28	G3/8"X19	10	13.5	31.5	22
1B-02-08	G1/8"X28	G1/2"X14	10	16	36	27
1B-04	G1/4"X19	G1/4"X19	12	12	30	19
1B-04-08	G1/4"X19	G1/2"X14	12	16	38	27
1B-04-10	G1/4"X19	G5/8"X14	12	17.5	39.5	30
1B-06	G3/8"X19	G3/8"X19	13.5	13.5	33	22
1B-06-08	G3/8"X19	G1/2"X14	13.5	16	39.5	27
1B-06-10	G3/8"X19	G5/8"X14	13.5	17.5	42	30
1B-06-12	G3/8"X19	G3/4"X14	13.5	18.5	43	32
1B-08	G1/2"X14	G1/2"X14	16	16	42	27
1B-08-10	G1/2"X14	G5/8"X14	16	17.5	43.5	30
1B-08-12	G1/2"X14	G3/4"X14	16	18.5	45.5	32
1B-10	G5/8"X14	G5/8"X14	17.5	17.5	45	30
1B-10-12	G5/8"X14	G3/4"X14	17.5	18.5	47	32
1B-10-16	G5/8"X14	G1"X11	17.5	20.5	51.5	41
1B-12	G3/4"X14	G3/4"X14	18.5	18.5	48	32
1B-12-16	G3/4"X14	G1"X11	18.5	20.5	52.5	41
1B-12-20	G3/4"X14	G1.1/4"X11	18.5	20.5	56	50
1B-16	G1"X11	G1"X11	20.5	20.5	54	41
1B-16-20	G1"X11	G1.1/4"X11	20.5	20.5	58	50
1B-16-24	G1"X11	G1.1/2"X11	20.5	23	60.5	55
1B-20	G1.1/4"X11	G1.1/4"X11	20.5	20.5	58	50
1B-20-24	G1.1/4"X11	G1.1/2"X11	20.5	23	60.5	55
1B-24	G1.1/2"X11	G1.1/2"X11	23	23	63	55
1B-24-32	G1.1/2"X11	G2"X11	23	25.5	66.5	70
1B-32	G2"X11	G2"X11	25.5	25.5	68	70
1B-40	G2.1/2"X11	G2.1/2"X11	32	32	81	90
1B-48	G3"X11	G3"X11	36	36	92	100



1B9

90° 弯英管外螺纹60° 内锥
90° ELBOW BSPP MALE 60° SEAT


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
1B9-02	G1/8"X28	G1/8"X28	19.8	19.8	11	
1B9-02-04	G1/8"X28	G1/4"X19	23	25	14	
1B9-04	G1/4"X19	G1/4"X19	24.5	24.5	14	
1B9-04-06	G1/4"X19	G3/8"X19	26.5	27.5	16	
1B9-06	G3/8"X19	G3/8"X19	27.5	27.5	16	
1B9-08	G1/2"X14	G1/2"X14	34.5	34.5	22	
1B9-08-12	G1/2"X14	G3/4"X14	37.5	40	27	
1B9-10	G5/8"X14	G5/8"X14	35	35	22	
1B9-10-12	G5/8"X14	G3/4"X14	37.5	39	30	
1B9-12	G3/4"X14	G3/4"X14	40	40	27	
1B9-12-16	G3/4"X14	G1"X11	43.5	46	33	
1B9-16	G1"X11	G1"X11	46	46	33	
1B9-16-20	G1"X11	G1.1/4"X11	50.5	50.5	41	
1B9-20	G1.1/4"X11	G1.1/4"X11	50.5	50.5	41	
1B9-20-24	G1.1/4"X11	G1.1/2"X11	54.5	57.5	48	
1B9-24	G1.1/2"X11	G1.1/2"X11	57.5	57.5	48	
1B9-32	G2"X11	G2"X11	68	68	63	

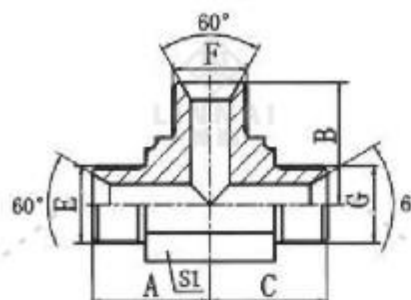

AB

英管外螺纹60° 内锥三通
BSPP MALE 60° SEAT TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
AB-02	G1/8"X28	G1/8"X28	G1/8"X28	19.8	19.8	19.8	11
AB-04	G1/4"X19	G1/4"X19	G1/4"X19	24.5	24.5	24.5	14
AB-04-06-04	G1/4"X19	G3/8"X19	G1/4"X19	26.5	27.5	26.5	16
AB-06-04-06	G3/8"X19	G1/4"X19	G3/8"X19	27.5	26.5	27.5	16
AB-06	G3/8"X19	G3/8"X19	G3/8"X19	27.5	27.5	27.5	16
AB-08-06-08	G1/2"X14	G3/8"X19	G1/2"X14	34.5	31	34.5	22
AB-08	G1/2"X14	G1/2"X14	G1/2"X14	34.5	34.5	34.5	22
AB-10	G5/8"X14	G5/8"X14	G5/8"X14	35	35	35	22
AB-12	G3/4"X14	G3/4"X14	G3/4"X14	40	40	40	27
AB-12-16-12	G3/4"X14	G1"X11	G3/4"X14	43.5	46	43.5	33
AB-16-12-16	G1"X11	G3/4"X14	G1"X11	46	43.6	46	33
AB-16	G1"X11	G1"X11	G1"X11	46	46	46	33
AB-20	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	50.5	50.5	41
AB-24	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	57.5	57.5	48
AB-32	G2"X11	G2"X11	G2"X11	72.5	72.5	72.5	63

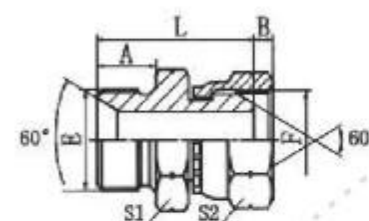

2B

英管外螺纹60° 内锥或六角端面用组合密封/
英管内螺纹60° 内锥


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2B-02	G1/8"X28	G1/8"X28	10	5.5	25	14	14
2B-02-04	G1/8"X28	G1/4"X19	10	5.5	27	14	19
2B-04	G1/4"X19	G1/4"X19	12	5.5	29	19	19
2B-04-06	G1/4"X19	G3/8"X19	12	6.3	30.5	19	22
2B-04-08	G1/4"X19	G1/2"X14	12	7.5	32	19	27
2B-06-08	G3/8"X19	G1/2"X14	13.5	7.5	35.5	22	27
2B-06-10	G3/8"X19	G5/8"X14	13.5	9.5	36	22	30
2B-08	G1/2"X14	G1/2"X14	16	7.5	40	27	27
2B-08-06	G1/2"X14	G3/8"X19	16	6.3	38.5	27	22
2B-08-12	G1/2"X14	G3/4"X14	16	10.9	41	27	32
2B-10	G5/8"X14	G5/8"X14	17.5	9.5	42	30	30
2B-10-08	G5/8"X14	G1/2"X14	17.5	7.5	41.5	30	27
2B-10-12	G5/8"X14	G3/4"X14	17.5	10.9	42.5	30	32
2B-12	G3/4"X14	G3/4"X14	18.5	10.9	44.5	32	32
2B-12-10	G3/4"X14	G5/8"X14	18.5	9.5	44	32	30
2B-12-16	G3/4"X14	G1"X11	18.5	11.7	46	32	41
2B-16	G1"X11	G1"X11	20.5	11.7	50	41	41
2B-16-12	G1"X11	G3/4"X11	20.5	10.9	49	41	32
2B-16-20	G1"X11	G1.1/4"X11	20.5	11	53	41	50
2B-20	G1.1/4"X11	G1.1/4"X11	20.5	11	55	50	50
2B-20-16	G1.1/4"X11	G1"X11	20.5	11.7	52	50	41
2B-20-24	G1.1/4"X11	G1.1/2"X11	20.5	13	55.5	50	55
2B-24	G1.1/2"X11	G1.1/2"X11	23	13	58	55	55
2B-32	G2"X11	G2"X11	25.5	16	63.5	70	70



2B9

90° 弯英管外螺纹60° 内锥/ 英管内螺纹60° 外锥
90° ELBOW BSPP MALE 60° SEAT / BSPP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
2B9-02	G1/8"X28	G1/8"X28	19.8	5.5	11	14
2B9-04	G1/4"X19	G1/4"X19	24.5	5.5	14	19
2B9-04-06	G1/4"X19	G3/8"X19	25	6.3	14	22
2B9-06	G3/8"X19	G3/8"X19	27.5	6.3	16	22
2B9-06-04	G3/8"X19	G1/4"X19	27.5	5.5	16	19
2B9-08-06	G1/2"X14	G3/8"X19	34.5	6.3	22	22
2B9-10	G5/8"X14	G5/8"X14	35	9.5	22	30
2B9-10-08	G5/8"X14	G1/2"X14	35	7.5	22	27
2B9-12	G3/4"X14	G3/4"X14	40	10.9	27	32
2B9-16	G1"X11	G1"X11	46	11.7	33	41
2B9-20	G1.1/4"X11	G1.1/4"X11	50.5	11	41	50
2B9-24	G1.1/2"X11	G1.1/2"X11	57.5	13	48	55
2B9-32	G2"X11	G2"X11	72.5	16	63	70

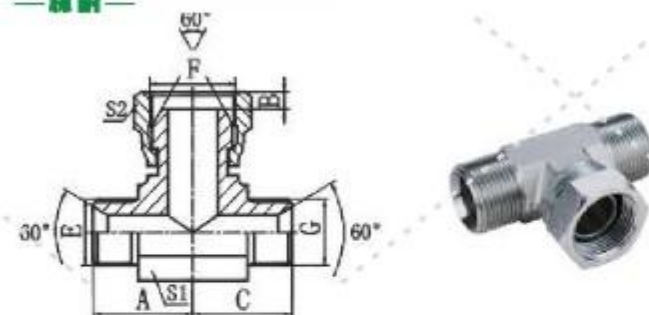

BB

英管外螺纹60° 内锥/
英管内螺纹60° 外锥三通
BSPP MALE 60° EAT/ BSPP FEMALE 60°
CONE BRANCH TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
BB-02	G1/8"X28	G1/8"X28	G1/8"X28	19.8	5.5	19.8	11	14
BB-04	G1/4"X19	G1/4"X19	G1/4"X19	24.5	5.5	24.5	14	19
BB-06	G3/8"X19	G3/8"X19	G3/8"X19	27.5	6.3	27.5	16	22
BB-08	G1/2"X14	G1/2"X14	G1/2"X14	34.5	7.5	34.5	22	27
BB-12	G3/4"X14	G3/4"X14	G3/4"X14	40	10.9	40	27	32
BB-20	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	11	50.5	41	50
BB-24	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	13	57.5	48	55
BB-32	G2"X11	G2"X11	G2"X11	72.5	16	72.5	63	70

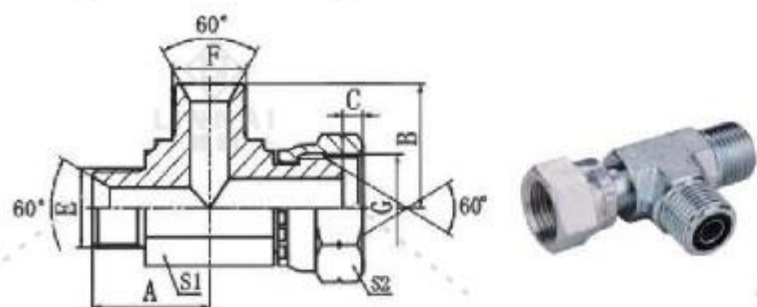

CB

英管外螺纹60° 内锥/
英管内螺纹60° 外锥三通
BSPP MALE 60° EAT/ BSPP FEMALE 60°
CONE BRANCH TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
CB-02	G1/8"X28	G1/8"X28	G1/8"X28	19.8	19.8	5.5	11	14
CB-04	G1/4"X19	G1/4"X19	G1/4"X19	25	25	5.5	14	19
CB-06	G3/8"X19	G3/8"X19	G3/8"X19	27.5	27.5	6.3	16	22
CB-08	G1/2"X14	G1/2"X14	G1/2"X14	34.5	34.5	7.5	22	27
CB-10	G5/8"X14	G5/8"X14	G5/8"X14	34.5	34.5	9.5	22	30
CB-16	G1"X11	G1"X11	G1"X11	46	46	11.7	33	41
CB-20	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	50.5	50.5	11	41	50
CB-24	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	57.5	57.5	13	48	55
CB-32	G2"X11	G2"X11	G2"X11	72.5	72.5	16	63	70

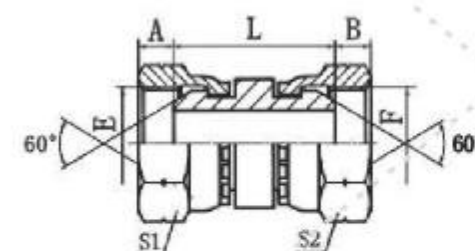

3B

英管内螺纹60° 外锥
BSPP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
3B-02	G1/8"X28	G1/8"X28	5.5	5.5	21	14	14
3B-02-04	G1/8"X28	G1/4"X19	5.5	5.5	23	14	19
3B-04	G1/4"X19	G1/4"X19	5.5	5.5	25	19	19
3B-04-06	G1/4"X19	G3/8"X19	5.5	6.3	26.5	19	22
3B-04-08	G1/4"X19	G1/2"X14	5.5	7.5	28.5	19	27
3B-06-08	G3/8"X19	G1/2"X14	6.3	7.5	29.5	22	27
3B-08	G1/2"X14	G1/2"X14	7.5	7.5	31	27	27
3B-08-10	G1/2"X14	G5/8"X14	7.5	9.5	31.5	27	30
3B-08-12	G1/2"X14	G3/4"X14	7.5	10.9	32.5	27	32
3B-10	G5/8"X14	G5/8"X14	9.5	9.5	31.5	30	30
3B-10-12	G5/8"X14	G3/4"X14	9.5	10.9	33	30	32
3B-12	G3/4"X14	G3/4"X14	10.9	10.9	33.5	32	32
3B-12-16	G3/4"X14	G1"X11	10.9	11.7	35	32	41
3B-16	G1"X11	G1"X11	11.7	11.7	36.5	41	41
3B-16-20	G1"X11	G1.1/4"X11	11.7	11	37.5	41	50
3B-20	G1.1/4"X11	G1.1/4"X11	11	11	40	50	50
3B-24	G1.1/2"X11	G1.1/2"X11	13	13	42	55	55
3B-32	G2"X11	G2"X11	16	16	47	70	70

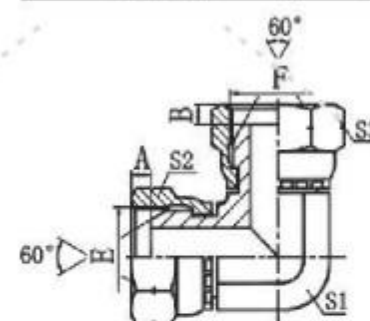

3B9

90° 英管内螺纹60° 外锥
90° BSPP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	S1	S2	S3
3B9-02	G1/8"X28	G1/8"X28	5.5	5.5	11	14	14
3B9-04	G1/4"X19	G1/4"X19	5.5	5.5	11	19	19
3B9-06	G3/8"X19	G3/8"X19	6.3	6.3	14	22	22
3B9-08	G1/2"X14	G1/2"X14	7.5	7.5	19	27	27
3B9-10	G5/8"X14	G5/8"X14	9.5	9.5	19	30	30
3B9-12	G3/4"X14	G3/4"X14	10.9	10.9	24	32	32
3B9-16	G1"X11	G1"X11	11.7	11.7	30	41	41
3B9-20	G1.1/4"X11	G1.1/4"X11	11	11	41	50	50
3B9-24	G1.1/2"X11	G1.1/2"X11	13	13	48	55	55
3B9-32	G2"X11	G2"X11	16	16	63	70	70

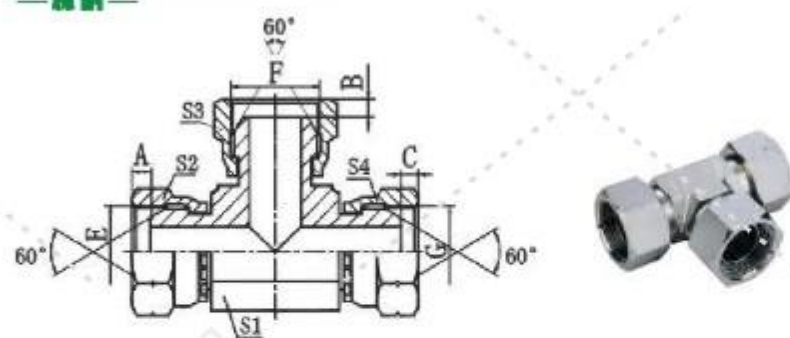

DB

英管内螺纹60° 外锥三通
BSPP FEMALE 60° CONE TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS		
	E	F	G	A, B, C	S1	S2, S3, S4
DB-02	G1/8"X28	G1/8"X28	G1/8"X28	5.5	11	14
DB-04	G1/4"X19	G1/4"X19	G1/4"X19	5.5	11	19
DB-06	G3/8"X19	G3/8"X19	G3/8"X19	6.3	14	22
DB-08	G1/2"X14	G1/2"X14	G1/2"X14	7.5	19	27
DB-10	G5/8"X14	G5/8"X14	G5/8"X14	9.5	22	30
DB-12	G3/4"X14	G3/4"X14	G3/4"X14	10.9	24	32
DB-16	G1"X11	G1"X11	G1"X11	11.7	30	41
DB-20	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	11	36	50
DB-24	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	13	48	55
DB-32	G2"X11	G2"X11	G2"X11	16	55	70



4B

英管外螺纹60° 内锥或
六角端面用组合垫密封堵头


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E		A	L	S1
4B-02	G1/8"X28		10	16	14
4B-04	G1/4"X19		12	18	19
4B-06	G3/8"X19		13.5	21.5	22
4B-08	G1/2"X14		16	26	27
4B-10	G5/8"X14		17.5	27.5	30
4B-12	G3/4"X14		18.5	29.5	32
4B-16	G1"X11		20.5	34	41
4B-20	G1.1/4"X11		20.5	37.5	50
4B-24	G1.1/2"X11		23	40	55
4B-32	G2"X11		25.5	43.5	70

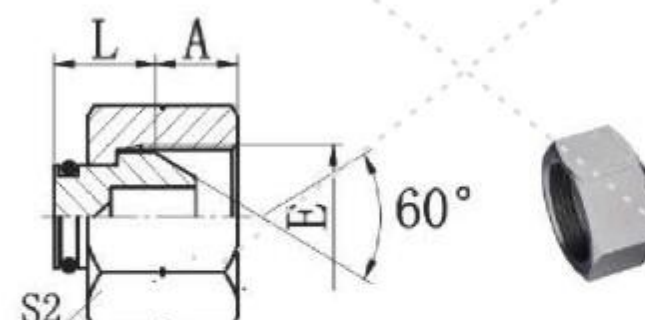

9B

英管内螺纹60° 外锥堵头
BSPP FEMALE 60° CONE PLUG

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E		A	L	S2
9B-02	G1/8"X28		5.5	11.5	14
9B-04	G1/4"X19		5.5	13.5	19
9B-06	G3/8"X19		6.3	14.5	22
9B-08	G1/2"X14		7.5	16	27
9B-10	G5/8"X14		9.5	16.5	30
9B-12	G3/4"X14		10.9	17.5	32
9B-16	G1"X11		11.7	19	41
9B-20	G1.1/4"X11		11	21.5	50
9B-24	G1.1/2"X11		13	22	55
9B-32	G2"X11		16	26.5	70

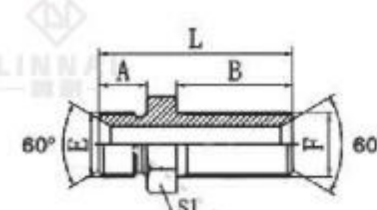

6B




6B-LN



英管外螺纹60° 内锥过板接头
BSPP MALE 60° SEAT BULKHEAD

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
6B-02	G1/8"X28	G1/8"X28	10	33	49	14	14
6B-04	G1/4"X19	G1/4"X19	12	35	53	19	19
6B-06	G3/8"X19	G3/8"X19	13.5	35	56.5	22	22
6B-08	G1/2"X14	G1/2"X14	16	39	65	27	27
6B-12	G3/4"X14	G3/4"X14	18.5	42	71.5	32	32
6B-16	G1"X11	G1"X11	20.5	50	84	41	41
6B-20	G1.1/4"X11	G1.1/4"X11	20.5	52	89.5	50	50
6B-24	G1.1/2"X11	G1.1/2"X11	23	55	93	55	55
6B-32	G2"X11	G2"X11	25.5	55	97.5	70	70


注：如需带锁母整套订货，则请在代号后加“LN”，如6B-16LN，锁母代号为8B。
Note: In case if you are interested to order the adapter in complete set with lock nut, it is necessary to insert suffix "LN" after our part no., for example 6B-16LN, The lock nut no. is 8B.



1BT-SP

弯英管外螺纹60° 内锥/ 英锥管外螺纹
ELBOW BSPP MALE 60° SEAT/BSPT MALE


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS			
	E	F	A	B	L	S1
1BT-02SP	G1/8"X28	R1/8"X28	10	10	26	14
1BT-02-04SP	G1/8"X28	R1/4"X19	10	14.5	30.5	14
1BT-04SP	G1/4"X19	R1/4"X19	12	14.5	32	19
1BT-04-02SP	G1/4"X19	R1/8"X28	12	10	28	19
1BT-04-06SP	G1/4"X19	R3/8"X19	12	15	32	19
1BT-04-08SP	G1/4"X19	R1/2"X14	12	20	40	24
1BT-06-04SP	G3/8"X19	R1/4"X19	13.5	14.5	35.5	22
1BT-06-08SP	G3/8"X19	R1/2"X14	13.5	20	40.5	24
1BT-08SP	G1/2"X14	R1/2"X14	16	20	45	27
1BT-08-04SP	G1/2"X14	R1/4"X19	16	14.5	40.5	27
1BT-08-06SP	G1/2"X14	R3/8"X19	16	15	40	27
1BT-08-12SP	G1/2"X14	R3/4"X14	16	20	45	30
1BT-10-06SP	G5/8"X14	R3/8"X19	17.5	15	41.5	30
1BT-10-08SP	G5/8"X14	R1/2"X14	17.5	20	46.5	30
1BT-10-12SP	G5/8"X14	R3/4"X14	17.5	20	46.5	30
1BT-10-16SP	G5/8"X14	R1"X11	17.5	25.5	54	36
1BT-12SP	G3/4"X14	R3/4"X14	18.5	20	48.5	32
1BT-12-08SP	G3/4"X14	R1/2"X14	18.5	20	49.5	32
1BT-12-16SP	G3/4"X14	R1"X11	18.5	25.5	53.5	36
1BT-12-20SP	G3/4"X14	R1.1/4"X11	18.5	26.5	50	46
1BT-16SP	G1"X11	R1"X11	20.5	25.5	58	41
1BT-16-12SP	G1"X11	R3/4"X14	20.5	20	53	41
1BT-16-20SP	G1"X11	R1.1/4"X11	20.5	26.5	60	46
1BT-20SP	G1.1/4"X11	R1.1/4"X11	20.5	26.5	62	50
1BT-20-12SP	G1.1/4"X11	R3/4"X14	20.5	20.5	56	50
1BT-20-16SP	G1.1/4"X11	R1"X11	20.5	25.5	61	50
1BT-20-24SP	G1.1/4"X11	R1.1/2"X11	20.5	26.5	62	50
1BT-24SP	G1.1/2"X11	R1.1/2"X11	23	26.5	64.5	55
1BT-24-16SP	G1.1/2"X11	R1"X11	23	25.5	63.5	55
1BT-24-20SP	G1.1/2"X11	R1.1/4"X11	23	26.5	64.5	55
1BT-24-32SP	G1.1/2"X11	R2"X11	23	30	70	65
1BT-32SP	G2"X11	R2"X11	25.5	30	72.5	70
1BT-32-20SP	G2"X11	R1.1/4"X11	25.5	27	68.5	70
1BT-32-24SP	G2"X11	R1.1/2"X11	25.5	26.5	68.5	70
1BT-40SP	G2.1/2"X11	R2.1/2"X11	32	34	83	90
1BT-48SP	G3"X11	R3"X11	36	38	94	100

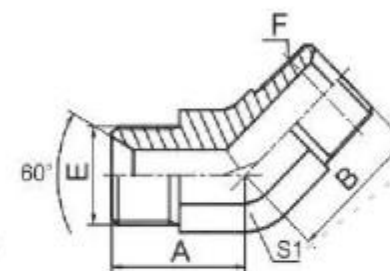

1BT4-SP

45° 弯英管外螺纹60° 内锥/英锥管外螺纹
45° ELBOW BSPP MALE 60° SEAT / BSPT MALE


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	B	S1
1BT4-02SP	G1/8"X28	R1/8"X28	17	17	11
1BT4-04SP	G1/4"X19	R1/4"X19	20.3	21	14
1BT4-04-06SP	G1/4"X19	R3/8"X19	20.5	23	16
1BT4-06SP	G3/8"X19	R3/8"X19	22	23	16
1BT4-06-04SP	G3/8"X19	R1/4"X19	22	21	16
1BT4-06-12SP	G3/8"X19	R3/4"X14	25.5	30.5	27
1BT4-08SP	G1/2"X14	R1/2"X14	27	29.5	22
1BT4-08-06SP	G1/2"X14	R3/8"X19	27	25	22
1BT4-08-12SP	G1/2"X14	R3/4"X14	28.5	30.5	27
1BT4-10-08SP	G5/8"X14	R1/2"X14	28.5	29.5	22
1BT4-10-12SP	G5/8"X14	R3/4"X14	29	35	27
1BT4-12SP	G3/4"X14	R3/4"X14	31	30.5	27
1BT4-12-08SP	G3/4"X14	R1/2"X14	31	30.5	27
1BT4-12-16SP	G3/4"X14	R1"X11	32.5	38	33
1BT4-16SP	G1"X11	R1"X11	35	38	33
1BT4-16-12SP	G1"X11	R3/4"X11	35	32.5	33
1BT4-16-20SP	G1"X11	R1.1/4"X11	38.5	43	41
1BT4-20SP	G1.1/4"X11	R1.1/4"X11	38.5	43	41
1BT4-20-16SP	G1.1/4"X11	R1"X11	38.5	42	41
1BT4-20-24SP	G1.1/4"X11	R1.1/2"X11	41.5	47.5	48
1BT4-24SP	G1.1/2"X11	R1.1/2"X11	44	47.5	48
1BT4-24-20SP	G1.1/2"X11	R1.1/4"X11	44	45.5	48
1BT4-24-32SP	G1.1/2"X11	R2"X11	51	60.5	63
1BT4-32SP	G2"X11	R2"X11	49.5	55.5	63
1BT4-32-24SP	G2"X11	R1.1/2"X11	51	52.5	63



1BT9-SP

90° 弯英管外螺纹60° 内锥/英锥管外螺纹
90° ELBOW BSPP MALE 60° SEAT / BSPT MALE


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	B	S1
1BT9-02SP	G1/8"X28	R1/8"X28	20	21	11
1BT9-02-04SP	G1/8"X28	R1/4"X19	22.3	25.5	14
1BT9-04SP	G1/4"X19	R1/4"X19	24.5	25.5	14
1BT9-04-02SP	G1/4"X19	R1/8"X28	25	23.5	14
1BT9-04-06SP	G1/4"X19	R3/8"X19	25	28.5	16
1BT9-06SP	G3/8"X19	R3/8"X19	27.5	28.5	16
1BT9-06-04SP	G3/8"X19	R1/4"X19	27.5	26.5	16
1BT9-06-08SP	G3/8"X19	R1/2"X14	31	36	22
1BT9-08SP	G1/2"X14	R1/2"X14	34.5	36	22
1BT9-08-04SP	G1/2"X14	R1/4"X19	34.5	30.5	22
1BT9-08-06SP	G1/2"X14	R3/8"X19	34.5	32.5	22
1BT9-08-12SP	G1/2"X14	R3/4"X14	37.5	43.5	27
1BT9-08-16SP	G1/2"X14	R1"X11	41	50	33
1BT9-10-08SP	G5/8"X14	R1/2"X14	35	36	22
1BT9-10-12SP	G5/8"X14	R3/4"X14	39	43.5	27
1BT9-12SP	G3/4"X14	R3/4"X14	40	43	27
1BT9-12-06SP	G3/4"X14	R3/8"X19	40	36	27
1BT9-12-08SP	G3/4"X14	R1/2"X14	40	39.5	27
1BT9-12-16SP	G3/4"X14	R1"X11	43.5	50	33
1BT9-12-20SP	G3/4"X14	R1.1/4"X11	48	56.5	41
1BT9-16SP	G1"X11	R1"X11	46	50	33
1BT9-16-08SP	G1"X11	R1/2"X14	46	43	33
1BT9-16-12SP	G1"X11	R3/4"X14	46	47.5	33
1BT9-16-20SP	G1"X11	R1.1/4"X11	50.5	56.5	41
1BT9-20SP	G1.1/4"X11	R1.1/4"X11	52	59	41
1BT9-20-12SP	G1.1/4"X11	R3/4"X14	50.5	54	41
1BT9-20-16SP	G1.1/4"X11	R1"X11	52	56.5	41
1BT9-20-24SP	G1.1/4"X11	R1.1/2"X11	54.5	62.5	48
1BT9-24SP	G1.1/2"X11	R1.1/2"X11	57.5	62	48
1BT9-24-20SP	G1.1/2"X11	R1.1/4"X11	57.5	61	48
1BT9-24-32SP	G1.1/2"X11	R2"X11	66	75	63
1BT9-32SP	G2"X11	R2"X11	67	75	63
1BT9-32-24SP	G2"X11	R1.1/2"X11	68	72	63

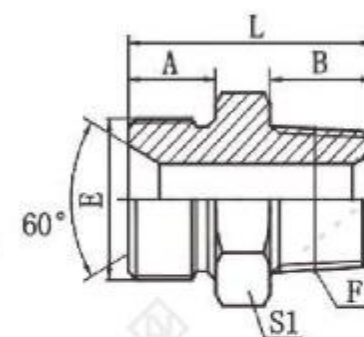

1BN

英管外螺纹60° 内锥或六角端面用组合垫密封
美制布锥管外螺纹
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / NPT MALE

代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS			
	E	F	A	B	L	S1
1BN-02	G1/8"X28	Z1/8"X27	10	10.5	26	14
1BN-02-04	G1/8"X28	Z1/4"X18	10	15	31	17
1BN-04	G1/4"X19	Z1/4"X18	12	15	33	19
1BN-04-02	G1/4"X19	Z1/8"X27	12	10.5	28	19
1BN-04-06	G1/4"X19	Z3/8"X18	12	16	34	19
1BN-06	G3/8"X19	Z3/8"X18	13.5	16	37.5	22
1BN-06-04	G3/8"X19	Z1/4"X18	13.5	15	36	22
1BN-06-08	G3/8"X19	Z1/2"X14	13.5	19.5	41	22
1BN-06-12	G3/8"X19	Z3/4"X14	13.5	19.5	43	30
1BN-08	G1/2"X14	Z1/2"X14	16	19.5	45.5	27
1BN-08-06	G1/2"X14	Z3/8"X18	16	16	42	27
1BN-08-12	G1/2"X14	Z3/4"X14	16	19.5	45.5	30
1BN-08-16	G1/2"X14	Z1"X11.5	16	25.5	52.5	36
1BN-10-08	G5/8"X14	Z1/2"X14	17.5	19.5	47	30
1BN-10-12	G5/8"X14	Z3/4"X14	17.5	19.5	47	30
1BN-12	G3/4"X14	Z3/4"X14	18.5	19.5	49	32
1BN-12-06	G3/4"X14	Z3/8"X18	18.5	16	45.5	32
1BN-12-08	G3/4"X14	Z1/2"X14	18.5	19.5	49	32
1BN-12-16	G3/4"X14	Z1"X11.5	18.5	25.5	55	36
1BN-16	G1"X11	Z1"X11.5	20.5	25.5	59	41
1BN-16-12	G1"X11	Z3/4"X14	20.5	19.5	53	41
1BN-16-20	G1"X11	Z1.1/4"X11.5	20.5	26.5	60	46
1BN-20	G1.1/4"X11	Z1.1/4"X11.5	20.5	26.5	62	50
1BN-20-16	G1.1/4"X11	Z1"X11.5	20.5	25.5	61	50
1BN-20-24	G1.1/4"X11	Z1.1/2"X11.5	20.5	27.5	63	50
1BN-24	G1.1/2"X11	Z1.1/2"X11.5	23	27.5	65.5	55
1BN-24-20	G1.1/2"X11	Z1.1/4"X11.5	23	26.5	64.5	55
1BN-24-32	G1.1/2"X11	Z2"X11.5	23	27.5	67.5	65
1BN-32	G2"X11	Z2"X11.5	25.5	27.5	70	70
1BN-32-20	G2"X11	Z1.1/4"X11.5	25.5	26.5	69	70
1BN-32-24	G2"X11	Z1.1/2"X11.5	25.5	27.5	70	70

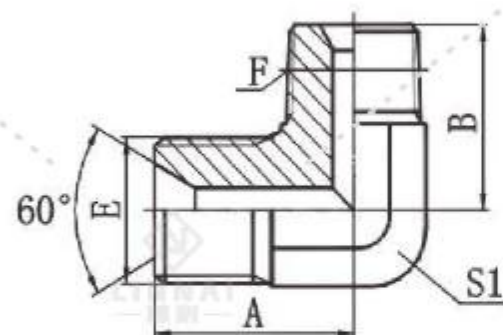


1BN9

90° 弯英管外螺纹60° 内锥美制布锥管外螺纹
90° ELBOW BSP MALE DOUBLE USE FOR 60°
NPT MALE



代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	B	S1
1BN9-04	G1/4"X19	Z1/4"X18	24.5	25.5	14
1BN9-04-02	G1/4"X19	Z1/8"X27	24.5	23.5	14
1BN9-06	G3/8"X19	Z3/8"X18	28.5	31	19
1BN9-06-04	G3/8"X19	Z1/4"X18	27.5	26.5	16
1BN9-06-08	G3/8"X19	Z1/2"X14	31	36.5	22
1BN9-08	G1/2"X14	Z1/2"X14	34.5	37.5	22
1BN9-08-06	G1/2"X14	Z3/8"X18	34.5	33	22
1BN9-12	G3/4"X14	Z3/4"X14	38	43.5	27
1BN9-12-08	G3/4"X14	Z1/2"X14	39	40	27
1BN9-12-16	G3/4"X14	Z1"X11.5	43	50	33
1BN9-16	G1"X11	Z1"X11.5	46	50	33
1BN9-16-12	G1"X11	Z3/4"X14	46	46.5	33

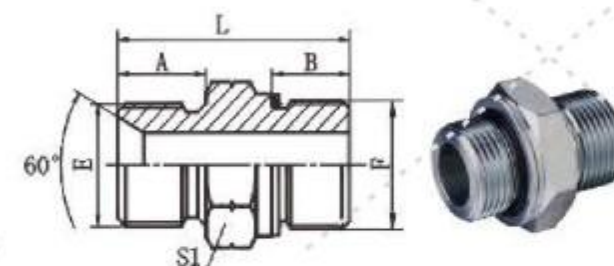


1BG

英管外螺纹60° 内锥或六角端面用组合垫密封/
英管外螺纹O形圈
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP MALE O-RING

代号 PART NO.	螺 纹 THREAD		O形圈 O-RING F端	尺 寸 DIMENSIONS			
	E	F		A	B	L	S1
1BG-02	G1/8"X28	G1/8"X28	O111	10	9.5	27	14
1BG-04	G1/4"X19	G1/4"X19	O111	12	11	31	19
1BG-04-06	G1/4"X19	G3/8"X19	O113	12	11.5	32	22
1BG-06	G3/8"X19	G3/8"X19	O113	13.5	11.5	33	22
1BG-06-04	G3/8"X19	G1/4"X19	O111	13.5	11	32.5	22
1BG-08	G1/2"X14	G1/2"X14	O115	16	14	41	27
1BG-08-06	G1/2"X14	G3/8"X19	O113	16	11.5	36	27
1BG-08-12	G1/2"X14	G3/4"X14	O119	16	15.5	45.5	32
1BG-10-08	G5/8"X14	G1/2"X14	O115	17.5	14	44.5	30
1BG-12	G3/4"X14	G3/4"X14	O119	18.5	15.5	46	32
1BG-12-08	G3/4"X14	G1/2"X14	O115	18.5	14	45.5	32
1BG-16-08	G1"X11	G1/2"X14	O115	20.5	14	50.5	41
1BG-16	G1"X11	G1"X11	O217	20.5	18	53	41
1BG-16-12	G1"X11	G3/4"X14	O119	20.5	15.5	52	41
1BG-20	G1.1/4"X11	G1.1/4"X11	O222	20.5	20	58.5	50
1BG-24	G1.1/2"X11	G1.1/2"X11	O224	23	21.5	62.5	55

注：F端与DIN 3852油口相配。 F end is connected with DIN 3852 port.

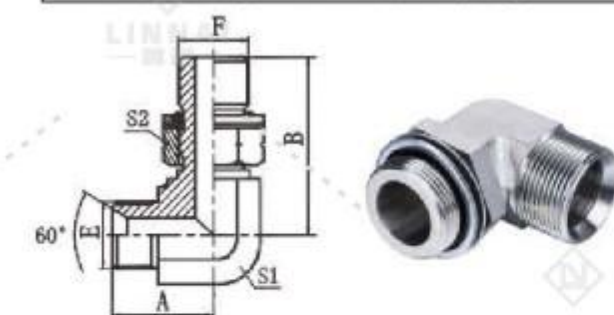

1BG9-OG

90° 弯英管外螺纹60° 内锥/
英管外螺纹O形圈可调向柱端
90° ELBOW BSP MALE 60° SEAT /
BSP MALE O-RING ADJUSTABLE STUD END

代号 PART NO.	螺 纹 THREAD		O形圈 O-RING F端	尺 寸 DIMENSIONS			
	E	F		A	B	S1	S2
1BG9-04OG	G1/4"X19	G1/4"X19	O111	25	31.5	14	19
1BG9-04-06OG	G1/4"X19	G3/8"X19	O113	26.5	36.8	16	22
1BG9-06OG	G3/8"X19	G3/8"X19	O113	28	36.8	16	22
1BG9-06-08OG	G3/8"X19	G1/2"X14	O115	31	43.2	22	27
1BG9-08OG	G1/2"X14	G1/2"X14	O115	34.5	43.2	22	27
1BG9-12OG	G3/4"X14	G3/4"X14	O119	40	49.3	27	32
1BG9-12-16OG	G3/4"X14	G1"X11	O217	45	53	33	41
1BG9-16OG	G1"X11	G1"X11	O217	46	53	33	41
1BG9-20-16OG	G1.1/4"X11	G1"X11	O217	50.5	58	41	41
1BG9-20OG	G1.1/4"X11	G1.1/4"X11	O222	51.5	58	41	50
1BG9-24OG	G1.1/2"X11	G1.1/2"X11	O224	58.5	63	48	55

注：F端与DIN 3852油口相配。 Note: F end is connected with DIN 3852 port.




1BJ

英管外螺纹60° 内锥或六角端面用组合垫密封/
美制JIC外螺纹74° 外锥
BSP MALE DOUBLE USE FOR 60° CONE SEAT
ORBONDED SEAL / JIC MALE 74° CONE

代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS			
	E	F	A	B	L	S1
1BJ-02-04	G1/8"X28	7/16"X20	10	14	30	14
1BJ-02-05	G1/8"X28	1/2"X20	10	14	30	14
1BJ-02-06	G1/8"X28	9/16"X18	10	14.1	30	17
1BJ-04	G1/4"X19	7/16"X20	12	14	32	19
1BJ-04-05	G1/4"X19	1/2"X20	12	14	32	19
1BJ-04-08	G1/4"X19	3/4"X16	12	16.7	36.5	22
1BJ-04-10	G1/4"X19	7/8"X14	12	19.3	39	24
1BJ-06	G3/8"X19	9/16"X18	13.5	14.1	35.5	22
1BJ-06-04	G3/8"X19	7/16"X20	13.5	14	35.5	22
1BJ-06-05	G3/8"X19	1/2"X20	13.5	14	35.5	22
1BJ-06-08	G3/8"X19	3/4"X16	13.5	16.7	36.5	22
1BJ-06-10	G3/8"X19	7/8"X14	13.5	19.3	41	24
1BJ-06-12	G3/8"X19	1.1/16"X12	13.5	21.9	45	30
1BJ-08	G1/2"X14	3/4"X16	16	16.7	43	27
1BJ-08-04	G1/2"X14	7/16"X20	16	14	40	27
1BJ-08-05	G1/2"X14	1/2"X20	16	14	40	27
1BJ-08-06	G1/2"X14	9/16"X18	16	14.1	40	27
1BJ-08-10	G1/2"X14	7/8"X14	16	19.3	45.5	27
1BJ-08-12	G1/2"X14	1.1/16"X12	16	21.9	48	30
1BJ-08-14	G1/2"X14	1.3/16"X12	16	22.6	49.5	32
1BJ-08-16	G1/2"X14	1.5/16"X12	16	23.1	50	36
1BJ-10	G5/8"X14	7/8"X14	17.5	19.3	47	30
1BJ-10-08	G5/8"X14	3/4"X16	17.5	16.7	44	30
1BJ-10-12	G5/8"X14	1.1/16"X12	17.5	21.9	49.5	30
1BJ-10-16	G5/8"X14	1.5/16"X12	17.5	23.1	51.5	36
1BJ-12	G3/4"X14	1.1/16"X12	18.5	21.9	51.5	32
1BJ-12-06	G3/4"X14	9/16"X18	18.5	14.1	43.5	32
1BJ-12-08	G3/4"X14	3/4"X16	18.5	16.7	46.5	32
1BJ-12-10	G3/4"X14	7/8"X14	18.5	19.3	49	32
1BJ-12-14	G3/4"X14	1.3/16"X12	18.5	22.6	52	32
1BJ-12-16	G3/4"X14	1.5/16"X12	18.5	23.1	52.5	34
1BJ-12-20	G3/4"X14	1.5/8"X12	18.5	24.3	55.5	46
1BJ-16	G1"X11	1.5/16"X12	20.5	23.1	57	41
1BJ-16-08	G1"X11	3/4"X16	20.5	16.7	50	41
1BJ-16-10	G1"X11	7/8"X14	20.5	19.3	53	41
1BJ-16-12	G1"X11	1.1/16"X12	20.5	21.9	55.5	41
1BJ-16-14	G1"X11	1.3/16"X12	20.5	22.6	56	41
1BJ-16-20	G1"X11	1.5/8"X12	20.5	24.3	58	46
1BJ-20	G1.1/4"X11	1.5/8"X12	20.5	24.3	62	50
1BJ-20-12	G1.1/4"X11	1.1/16"X12	20.5	21.9	57.5	50
1BJ-20-16	G1.1/4"X11	1.5/16"X12	20.5	23.1	60.5	50
1BJ-20-24	G1.1/4"X11	1.7/8"X12	20.5	27.5	63	50
1BJ-24-16	G1.1/2"X11	1.5/16"X12	23	23.1	61	55
1BJ-24-20	G1.1/2"X11	1.5/8"X12	23	24.3	62.5	55
1BJ-24	G1.1/2"X11	1.7/8"X12	23	27.5	67.5	55
1BJ-24-32	G1.1/2"X11	2.1/2"X12	23	33.9	74	65
1BJ-32	G2"X11	2.1/2"X12	25.5	33.9	77.5	70
1BJ-32-24	G2"X11	1.7/8"X12	25.5	27.5	70	70

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

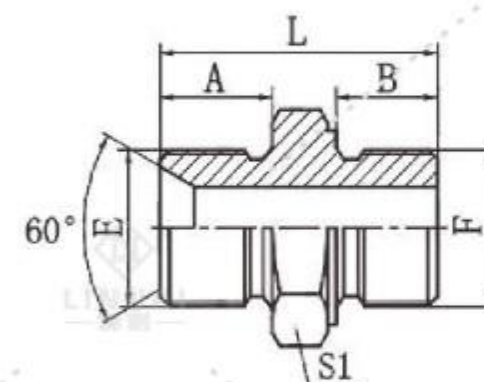


1BL

英管外螺纹60° 内锥或六角端面用组合垫密封/
公制外螺纹组合垫圈
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / METRIC MALE WITH BONDED SEAL




代号 PART NO.	螺 纹 THREAD		密形圈 SEAL	尺 寸 DIMENSIONS			
	E	F		A	B	L	S1
1BL-02-10	G1/8"X28	M10x1	ZHD-10	10	8	25	17
1BL-04-10	G1/4"X19	M10x1	ZHD-10	12	8	27	19
1BL-04-14	G1/4"X19	M14x1.5	ZHD-14	12	12	31	19
1BL-06-14	G3/8"X19	M14x1.5	ZHD-14	13.5	12	35	22
1BL-06-16	G3/8"X19	M16x1.5	ZHD-16	13.5	12	34	22
1BL-08-16	G1/2"X14	M16x1.5	ZHD-16	16	12	38	27
1BL-08-18	G1/2"X14	M18x1.5	ZHD-18	16	12	38	27
1BL-08-22	G1/2"X14	M22x1.5	ZHD-22	16	14	41.5	30
1BL-10-33	G5/8"X14	M33x2	ZHD-33	17.5	18	48.5	41
1BL-12-16	G3/4"X14	M16X1.5	ZHD-16	18.5	12	41.5	32
1BL-12-22	G3/4"X14	M22x1.5	ZHD-22	18.5	14	43.5	30
1BL-12-27	G3/4"X14	M27x2	ZHD-27	18.5	16	45.5	36
1BL-12-33	G3/4"X14	M33x2	ZHD-33	18.5	18	49.5	41
1BL-16-27	G1"X11	M27x2	ZHD-27	20.5	16	51.5	41
1BL-16-33	G1"X11	M33x2	ZHD-33	20.5	18	53.5	41
1BL-20-42	G1.1/4"X11	M42x2	ZHD-42	20.5	20	56.5	50

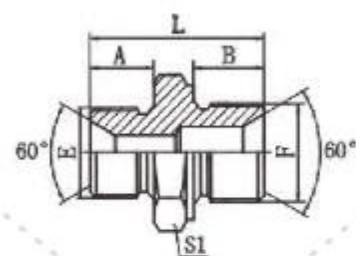

1BM

英管外螺纹60° 内锥或六角端面用组合垫密封/
公制外螺纹60° 内锥或六角端面用组合垫密封
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / METRIC MALE DOUBLE USE
FOR 60° CONE SEAT OR BONDED SEAL


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS			
	E	F	A	B	L	S1
1BM-02-10	G1/8"X28	M10X1	10	8	25	14
1BM-02-12	G1/8"X28	M12X1.5	10	10	27	17
1BM-04-12	G1/4"X19	M12X1.5	12	10	29	19
1BM-04-14	G1/4"X19	M14X1.5	12	11	30	19
1BM-04-16	G1/4"X19	M16X1.5	12	12	33	22
1BM-06-10	G3/8"X19	M10X1	13.5	8	29.5	22
1BM-06-12	G3/8"X19	M12X1.5	13.5	10	31.5	22
1BM-06-14	G3/8"X19	M14X1.5	13.5	11	32.5	22
1BM-06-16	G3/8"X19	M16X1.5	13.5	12	33.5	22
1BM-06-18	G3/8"X19	M18X1.5	13.5	12	34.5	24
1BM-06-20	G3/8"X19	M20X1.5	13.5	14	38.5	27
1BM-06-22	G3/8"X19	M22X1.5	13.5	14	38.5	27
1BM-08-14	G1/2"X14	M14X1.5	16	11	38	27
1BM-08-16	G1/2"X14	M16X1.5	16	12	39	27
1BM-08-18	G1/2"X14	M18X1.5	16	12	39	27
1BM-08-20	G1/2"X14	M20X1.5	16	14	41	27
1BM-08-22	G1/2"X14	M22X1.5	16	14	41	27
1BM-08-24	G1/2"X14	M24X1.5	16	14	41	30
1BM-08-26	G1/2"X14	M26X1.5	16	16	44	32
1BM-08-27D	G1/2"X14	M27X1.5	16	16	44	32
1BM-08-30	G1/2"X14	M30X1.5	16	18	45	36
1BM-10-22	G5/8"X14	M22X1.5	17.5	14	42.5	30
1BM-10-26	G5/8"X14	M26X1.5	17.5	16	45.5	32
1BM-12-18	G3/4"X14	M18X1.5	18.5	12	42.5	32
1BM-12-20	G3/4"X14	M20X1.5	18.5	14	44.5	32
1BM-12-22	G3/4"X14	M22X1.5	18.5	14	44.5	32
1BM-12-24	G3/4"X14	M24X1.5	18.5	14	44.5	32
1BM-12-26	G3/4"X14	M26X1.5	18.5	16	46.5	32
1BM-12-27	G3/4"X14	M27X2	18.5	16	46.5	32
1BM-12-27D	G3/4"X14	M27X1.5	18.5	16	46.5	32
1BM-12-30	G3/4"X14	M30X2	18.5	18	47.5	36
1BM-12-30D	G3/4"X14	M30X1.5	18.5	18	47.5	36
1BM-16-14	G1"X11	M14X1.5	20.5	11	45.5	41
1BM-16-22	G1"X11	M22X1.5	20.5	14	48.5	41

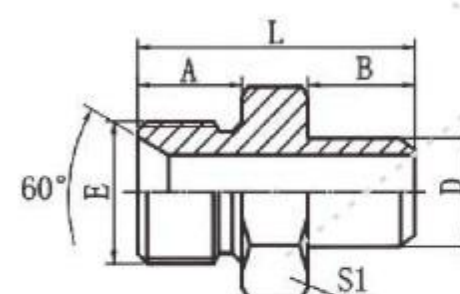

1BW

英管外螺纹60° 内锥或六角端面用组合垫
密封/ 焊接管
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / BUTT-WELD TUBE


代号 PART NO.	螺 纹 THREAD E	管子直径 TUBE O.D.	尺 寸 DIMENSIONS				
			A	B	D	L	S1
1BW-04-10	G1/4"X19	10	12	7	10	25	19
1BW-06-14	G3/8"X19	14	13.5	8	14	29.5	22
1BW-08-18	G1/2"X14	18	16	10	18	36	27
1BW-12-22	G3/4"X14	22	18.5	10	22	39.5	32
1BW-12-28	G3/4"X14	28	18.5	12	28	41.5	32
1BW-16-30	G1"X11	30	20.5	12	30	45.5	41
1BW-20-34	G1.1/4"X11	34	20.5	14	34	49.5	50
1BW-20-36	G1.1/4"X11	36	20.5	14	36	49.5	50
1BW-20-42	G1.1/4"X11	42	20.5	16	42	51.5	50
1BW-24-36	G1.1/2"X11	36	23	14	36	52	55
1BW-24-42	G1.1/2"X11	42	23	16	42	54	55
1BW-24-50	G1.1/2"X11	50	23	16	50	54	55

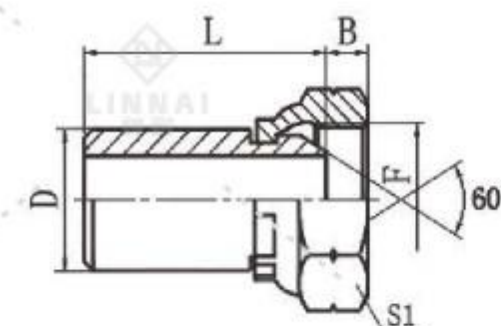

2WB

焊接管/ 英管内螺纹60° 外锥
BUTT-WELD TUBE / BSP FEMALE 60° CONE

代号 PART NO.	螺 纹 THREAD F	管子直径 TUBE O.D.	尺 寸 DIMENSIONS			
			B	D	L	S1
2WB-10-04	G1/4"X19	10	5.5	10	35	19
2WB-14-06	G3/8"X19	14	6.3	14	40	22
2WB-18-08	G1/2"X14	18	7.5	18	50	27
2WB-22-08	G1/2"X14	22	7.5	22	50	27
2WB-22-12	G3/4"X14	22	10.9	22	62	32
2WB-34-20	G1.1/4"X11	34	11	34	68	50
2WB-42-20	G1.1/4"X11	42	11	42	59.5	50
2WB-50-24	G1.1/2"X11	50	13	50	57.5	55

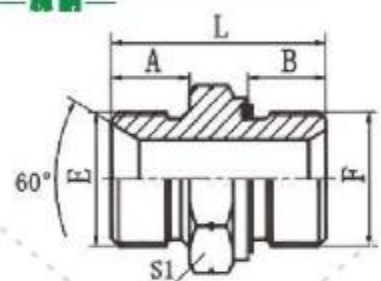


1B-WD

英管外螺纹60° 内锥或六角端面用组合垫
密封/ 英管外螺纹胶垫密封

BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL /BSP MALE CAPTIVE SEAL


代号 PART NO.	螺纹 THREAD		F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1B-04WD	G1/4"X19	G1/4"X19	WD-B04	12	12	32	19
1B-04-06WD	G1/4"X19	G3/8"X19	WD-B06	12	12	34.5	22
1B-04-08WD	G1/4"X19	G1/2"X14	WD-B08	12	14	39	27
1B-06WD	G3/8"X19	G3/8"X19	WD-B06	13.5	12	34	22
1B-06-08WD	G3/8"X19	G1/2"X14	WD-B08	13.5	14	40.5	27
1B-08WD	G1/2"X14	G1/2"X14	WD-B08	16	14	43	27
1B-08-12WD	G1/2"X14	G3/4"X14	WD-B12	16	16	46	32
1B-12WD	G3/4"X14	G3/4"X14	WD-B12	18.5	16	46.5	32
1B-12-16WD	G3/4"X14	G1"X11	WD-B16	18.5	18	52.5	41
1B-16WD	G1"X11	G1"X11	WD-B16	20.5	18	54.5	41
1B-16-20WD	G1"X11	G1.1/4"X11	WD-B20	20.5	20	58.5	50
1B-20WD	G1.1/4"X11	G1.1/4"X11	WD-B20	20.5	20	58.5	50

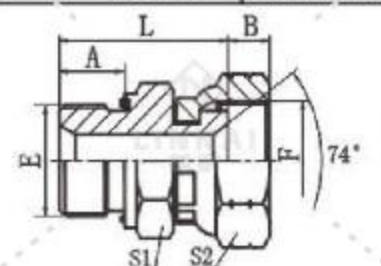

2BJ-WD

英管外螺纹胶垫密封/ 美制JIC内螺纹74° 内锥
BSP MALE CAPTIVE SEAL/JIC FEMALE 74° SEAT


代号 PART NO.	螺纹 THREAD		胶垫CAPTIVE E端	尺寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
2BJ-02-04WD	G1/8"X28	7/16"X20	WD-B02	8	9	23.5	14	15
2BJ-04-05WD	G1/4"X19	1/2"X20	WD-B04	12	9.5	28.5	19	17
2BJ-04-06WD	G1/4"X19	9/16"X18	WD-B04	12	10.5	28.5	19	19
2BJ-04-08WD	G1/4"X19	3/4"X16	WD-B04	12	11	30.5	19	24
2BJ-04WD	G1/4"X19	7/16"X20	WD-B04	12	9	28	19	15
2BJ-06-08WD	G3/8"X19	3/4"X16	WD-B06	12	11	33	22	24
2BJ-06WD	G3/8"X19	9/16"X18	WD-B06	12	10.5	31	22	19
2BJ-08-06WD	G1/2"X14	9/16"X18	WD-B08	14	10.5	33.5	27	19
2BJ-08-10WD	G1/2"X14	7/8"X14	WD-B08	14	13	38	27	27
2BJ-08WD	G1/2"X14	3/4"X16	WD-B08	14	11	37.5	27	24
2BJ-12-16WD	G3/4"X14	1.5/16"X12	WD-B12	16	16	42.5	32	41
2BJ-12WD	G3/4"X14	1.1/16"X12	WD-B12	16	15	42.5	32	32
2BJ-16WD	G1"X11	1.5/16"X12	WD-B16	18	16	46.5	41	41
2BJ-20-16WD	G1.1/4"X11	1.5/16"X12	WD-B20	20	16	50.5	50	41
2BJ-20WD	G1.1/4"X11	1.5/8"X12	WD-B20	20	17	54.5	50	50
2BJ-24WD	G1.1/2"X11	1.7/8"X12	WD-B24	22	20	58.5	55	55

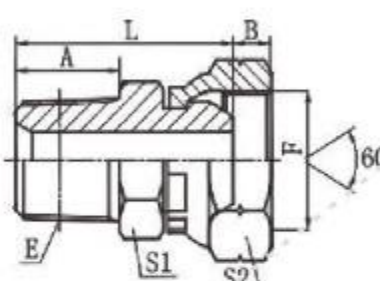

2NB

布锥管外螺纹/ 英管内螺纹60° 外锥
NPT MALE / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2NB-02	Z1/8"X27	G1/8"X28	10.5	5.5	25.5	12	14
2NB-02-04	Z1/8"X27	G1/4"X19	10.5	5.5	27	14	19
2NB-04	Z1/4"X18	G1/4"X19	15	5.5	31	17	19
2NB-04-06	Z1/4"X18	G3/8"X19	15	6.3	32.5	17	22
2NB-04-08	Z1/4"X18	G1/2"X14	15	7.5	35	19	27
2NB-06	Z3/8"X18	G3/8"X19	16	6.3	33.5	19	27
2NB-06-08	Z3/8"X18	G1/2"X14	16	7.5	36	19	27
2NB-08	Z1/2"X14	G1/2"X14	19.5	7.5	41	22	27
2NB-08-06	Z1/2"X14	G3/8"X19	19.5	6.3	39.5	24	24
2NB-08-12	Z1/2"X14	G3/4"X14	19.5	10.9	44.5	27	32
2NB-12	Z3/4"X14	G3/4"X14	19.5	10.9	44.5	30	32
2NB-12-16	Z3/4"X14	G1"X11	19.5	11.7	46.5	32	41
2NB-16	Z1"X11.5	G1"X11	25.5	11.7	52.5	36	41
2NB-16-20	Z1"X11.5	G1.1/4"X11	25.5	11	59.5	41	50
2NB-20	Z1.1/4"X11.5	G1.1/4"X11	26.5	11	60.4	46	50
2NB-24	Z1.1/2"X11.5	G1.1/2"X11	27.5	13	62	50	55
2NB-32	Z2"X11.5	G2"X11	27.5	20	65.4	65	70



2NB9

90° 弯布锥管外螺纹/ 英管内螺纹60° 外锥
90° ELBOW NPT MALE / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
2NB9-02	Z1/8"X27	G1/8"X28	21	5.5	11	14
2NB9-04	Z1/4"X18	G1/4"X19	25.5	5.5	14	19
2NB9-04-06	Z1/4"X18	G3/8"X19	25.5	6.3	14	22
2NB9-06	Z3/8"X18	G3/8"X19	31	6.3	19	22
2NB9-06-04	Z3/8"X18	G1/4"X19	31	5.5	19	19
2NB9-08	Z1/2"X14	G1/2"X14	37.3	7.5	22	27
2NB9-08-06	Z1/2"X14	G3/8"X19	36.7	6.3	22	22
2NB9-12	Z3/4"X14	G3/4"X14	43.5	10.9	27	32
2NB9-12-08	Z3/4"X14	G1/2"X14	45	7.5	27	27
2NB9-12-16	Z3/4"X14	G1"X11	45	11.7	30	41
2NB9-16	Z1"X11.5	G1"X11	50	11.7	33	41
2NB9-16-12	Z1"X11.5	G3/4"X14	50	10.9	33	32
2NB9-20	Z1.1/4"X11.5	G1.1/4"X11	54.5	11	41	50
2NB9-24	Z1.1/2"X11.5	G1.1/2"X11	59	13	48	55
2NB9-32	Z2"X11.5	G2"X11	73.5	16	63	70

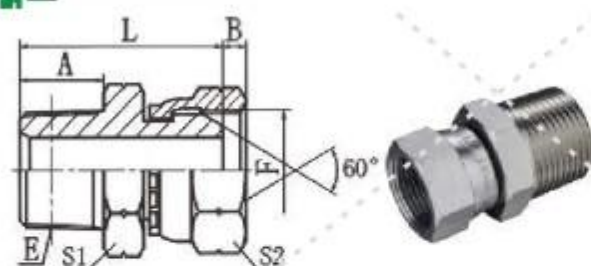

2TB-SP

英锥管外螺纹/ 英管内螺纹60° 外锥
BSPT MALE / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2TB-02SP	R1/8"X28	G1/8"X28	10	5.5	25	12	14
2TB-04SP	R1/4"X19	G1/4"X19	14.5	5.5	31.5	17	19
2TB-06SP	R3/8"X19	G3/8"X19	15	6.3	33	19	22
2TB-06-04SP	R3/8"X19	G1/4"X19	15	5.5	32	19	19
2TB-06-08SP	R3/8"X19	G1/2"X14	15	7.5	35	19	27
2TB-08SP	R1/2"X14	G1/2"X14	20	7.5	42	22	27
2TB-08-12SP	R1/2"X14	G3/4"X14	20	10.9	45	27	32
2TB-12SP	R3/4"X14	G3/4"X14	20	10.9	45	30	32
2TB-12-08SP	R3/4"X14	G1/2"X14	20	7.5	44	30	27
2TB-12-16SP	R3/4"X14	G1"X11	20	11.7	47	32	41
2TB-16SP	R1"X11	G1"X11	25.5	11.7	52.5	36	41
2TB-16-12SP	R1"X11	G3/4"X14	25.5	10.9	51.5	36	32
2TB-20-16SP	R1.1/4"X11	G1"X11	26.5	11.7	55.5	46	41
2TB-20SP	R1.1/4"X11	G1.1/4"X11	26.5	11	59	46	50
2TB-24SP	R1.1/2"X11	G1.1/2"X11	26.5	13	61.5	50	55
2TB-32SP	R2"X11	G2"X11	30	16	68	65	70



2TB9-SP

90° 弯英锥管外螺纹/ 英管内螺纹60° 外锥
90° ELBOW BSPT MALE / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
2TB9-02SP	R1/8"X28	G1/8"X28	21	5.5	11	14
2TB9-04SP	R1/4"X19	G1/4"X19	25.5	5.5	14	19
2TB9-06SP	R3/8"X19	G3/8"X19	28.5	6.3	16	22
2TB9-06-08SP	R3/8"X19	G1/2"X14	31	7.5	19	27
2TB9-08-06SP	R1/2"X14	G3/8"X19	36	6.3	22	22
2TB9-08SP	R1/2"X14	G1/2"X14	36	7.5	22	27
2TB9-08-12SP	R1/2"X14	G3/4"X14	37	10.9	24	32
2TB9-12-08SP	R3/4"X14	G1/2"X14	43.5	7.5	27	27
2TB9-12SP	R3/4"X14	G3/4"X14	43.5	10.9	27	32
2TB9-16SP	R1"X11	G1"X11	50	11.7	33	41
2TB9-20SP	R1.1/4"X11	G1.1/4"X11	58	11	41	50
2TB9-24SP	R1.1/2"X11	G1.1/2"X11	62.5	13	48	55

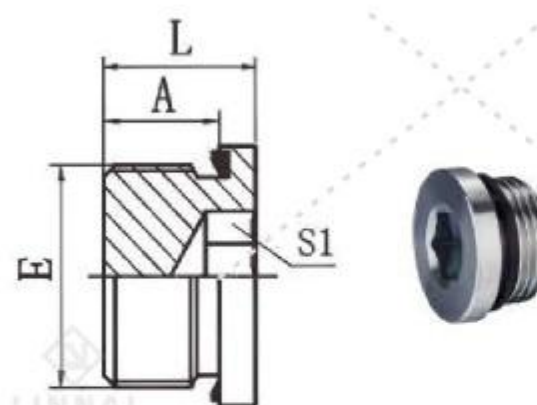

4BN-WD

英管外螺纹胶垫密封内六角堵头
BSP MALE CAPTIVE SEAL HOLLOW HEX PLUG


代号 PART NO.	螺纹 THREAD	胶垫 CAPTIVE	尺寸 DIMENSIONS		
	E	E端	A	L	S1
4BN-02WD	G1/8"X28	WD-B02	8	12.2	5
4BN-04WD	G1/4"X19	WD-B04	12	17.2	6
4BN-06WD	G3/8"X19	WD-B06	12	17.2	8
4BN-08WD	G1/2"X14	WD-B08	14	19.2	10
4BN-12WD	G3/4"X14	WD-B12	16	21.2	12
4BN-16WD	G1"X11	WD-B16	16	22.8	17
4BN-20WD	G1.1/4"X11	WD-B20	20	26.8	22
4BN-24WD	G1.1/2"X11	WD-B24	22	28.8	24

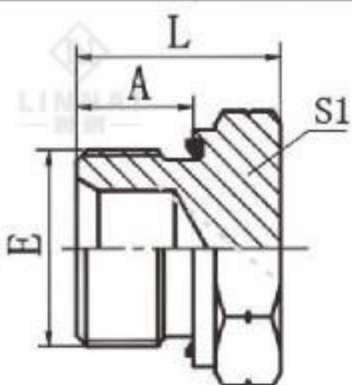

4B-WD

英管外螺纹胶垫密封堵头
BSP MALE CAPTIVE SEAL PLUG

代号 PART NO.	螺纹 THREAD	胶垫 CAPTIVE	尺寸 DIMENSIONS		
	E	E端	A	L	S1
4B-02WD	G1/8"X28	WD-B02	8	15.5	14
4B-04WD	G1/4"X19	WD-B04	12	19.6	19
4B-06WD	G3/8"X19	WD-B06	12	22.5	22
4B-08WD	G1/2"X14	WD-B08	14	25	27
4B-12WD	G3/4"X14	WD-B12	16	29	32
4B-16WD	G1"X11	WD-B16	18	35	41
4B-20WD	G1.1/4"X11	WD-B20	20	37	50
4B-24WD	G1.1/2"X11	WD-B24	22	40	55

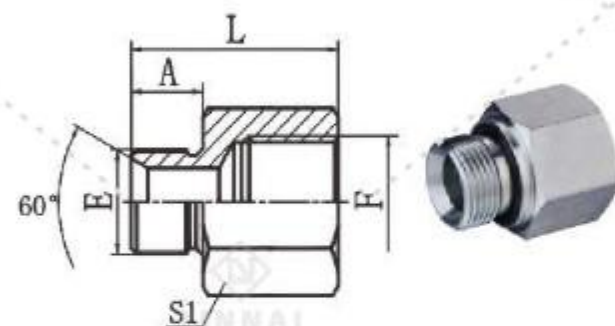


5B

英管外螺纹60° 内锥或六角端面用组合垫密封
英管内螺纹ISO 1179

BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / BSP FEMALE ISO 1179


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	L	S1
5B-02-04	G1/8"X28	G1/4"X19	11	29	19
5B-04-02	G1/4"X19	G 1/8"X28	12	28	19
5B-04	G1/4"X19	G1/4"X19	12	33	19
5B-04-06	G1/4"X19	G3/8"X19	12	36	22
5B-06-04	G3/8"X19	G1/4"X19	13.5	33.5	22
5B-06	G3/8"X19	G3/8"X19	13.5	37.5	22
5B-06-08	G3/8"X19	G1/2"X14	13.5	42.5	27
5B-08-06	G1/2"X14	G3/8"X19	16	38	27
5B-08	G1/2"X14	G1/2"X14	16	45	27
5B-08-10	G1/2"X14	G5/8"X14	16	46	30
5B-08-12	G1/2"X14	G3/4"X14	16	44.5	36
5B-10-08	G5/8"X14	G1/2"X14	16	41.5	30
5B-12-08	G3/4"X14	G1/2"X14	18.5	44.5	32
5B-12	G3/4"X14	G3/4"X14	18.5	48	36
5B-12-16	G3/4"X14	G1"X11	18.5	53.5	41
5B-16-12	G1"X11	G3/4"X14	20.5	47.5	41
5B-16	G1"X11	G1"X11	20.5	55.5	41
5B-16-20	G1"X11	G1.1/4"X11	20.5	56.5	50
5B-20-16	G1.1/4"X11	G1"X11	20.5	49	50
5B-20	G1.1/4"X11	G1.1/4"X11	20.5	52.5	50
5B-20-24	G1.1/4"X11	G1.1/2"X11	20.5	57.5	55
5B-24	G1.1/2"X11	G1.1/2"X11	23	58	55
5B-32-24	G2"X11	G1.1/2"X11	26	59.5	70
5B-32	G2"X11	G2"X11	26	63	70

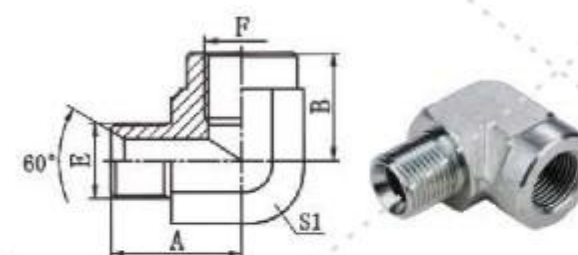

5B9

90° 弯英管外螺纹60° 内锥/ 英管内螺纹ISO 1179
90° ELBOW BSP MALE 60° SEAT/BSP FEMALE ISO 1179


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	B	S1
5B9-02	G1/8"X28	G1/8"X28	22.5	20	16
5B9-04	G1/4"X19	G1/4"X19	25.5	22	19
5B9-06	G3/8"X19	G3/8"X19	30.5	26	24
5B9-08	G1/2"X14	G1/2"X14	39	31	30
5B9-12	G3/4"X14	G3/4"X14	43.5	37	33
5B9-16	G1"X11	G1"X11	50.5	43	41
5B9-20	G1.1/4"X11	G1.1/4"X11	55	46	50

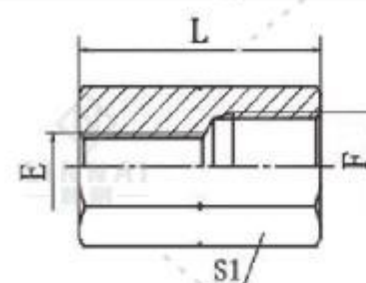

7B

英管内螺纹ISO 1179
BSP FEMALE ISO 1179


代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS	
	E	F	L	S1
7B-02	G1/8"X28	G1/8"X28	22	14
7B-02-04	G1/8"X28	G1/4"X19	24	19
7B-04	G1/4"X19	G1/4"X19	24	19
7B-04-06	G1/4"X19	G3/8"X19	29	22
7B-06	G3/8"X19	G3/8"X19	26	22
7B-08	G1/2"X14	G1/2"X14	32	27
7B-08-10	G1/2"X14	G5/8"X14	36	30
7B-10	G5/8"X14	G5/8"X14	36	30
7B-12	G3/4"X14	G3/4"X14	36	32
7B-12-16	G3/4"X14	G1"X11	43	41
7B-16	G1"X11	G1"X11	40	41
7B-16-20	G1"X11	G1.1/4"X11	46	50
7B-20	G1.1/4"X11	G1.1/4"X11	44	50
7B-20-24	G1.1/4"X11	G1.1/2"X11	48	55
7B-24	G1.1/2"X11	G1.1/2"X11	45	55
7B-24-32	G1.1/2"X11	G2"X11	56	70
7B-32	G2"X11	G2"X11	54	70

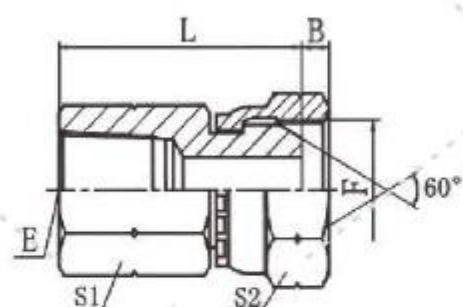

7TB-S

英锥管内螺纹/ 英管内螺纹60° 外锥
BSPT FEMALE / BSP FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	B	L	S1	S2
7TB-02-04S	Rc1/8"X28	G1/4"X19	5.5	26.5	17	19
7TB-04S	Rc1/4"X19	G1/4"X19	5.5	31	19	19
7TB-04-06S	Rc1/4"X19	G3/8"X19	6.3	31	19	22
7TB-06S	Rc3/8"X19	G3/8"X19	6.3	35.2	22	22
7TB-06-08S	Rc3/8"X19	G1/2"X14	7.5	37	22	27
7TB-08S	Rc1/2"X14	G1/2"X14	7.5	42	27	27
7TB-12S	Rc3/4"X14	G3/4"X14	10.9	45.1	36	32
7TB-16S	Rc1"X11	G1"X11	11.7	51.3	41	41



7B9-PK

90° 英管内螺纹ISO 1179
90° BSP FEMALE ISO 1179


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
7B9-02PK	G1/8"X28	G1/8"X28	20	20	16
7B9-04PK	G1/4"X19	G1/4"X19	22.5	22.5	19
7B9-06PK	G3/8"X19	G3/8"X19	26	26	24
7B9-08PK	G1/2"X14	G1/2"X14	31	31	27
7B9-12PK	G3/4"X14	G3/4"X14	34	34	33
7B9-16PK	G1"X11	G1"X11	42	42	41
7B9-20PK	G1.1/4"X11	G1.1/4"X11	48	48	50
7B9-24PK	G1.1/2"X11	G1.1/2"X11	53	53	60
7B9-32PK	G2"X11	G2"X11	62	62	70

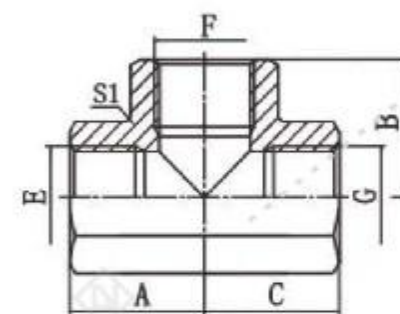

GB-PK

英管内螺纹ISO 1179 三通
BSP FEMALE ISO 1179 TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
GB-02PK	G1/8"X28	G1/8"X28	G1/8"X28	20	20	20	16
GB-04PK	G1/4"X19	G1/4"X19	G1/4"X19	22.5	22.5	22.5	19
GB-06PK	G3/8"X19	G3/8"X19	G3/8"X19	26	26	26	24
GB-08PK	G1/2"X14	G1/2"X14	G1/2"X14	31	31	31	27
GB-12PK	G3/4"X14	G3/4"X14	G3/4"X14	34	34	34	33
GB-16PK	G1"X11	G1"X11	G1"X11	42	42	42	41
GB-20PK	G1.1/4"X11	G1.1/4"X11	G1.1/4"X11	48	48	48	50
GB-24PK	G1.1/2"X11	G1.1/2"X11	G1.1/2"X11	53	53	53	60
GB-32PK	G2"X11	G2"X11	G2"X11	62	62	62	70

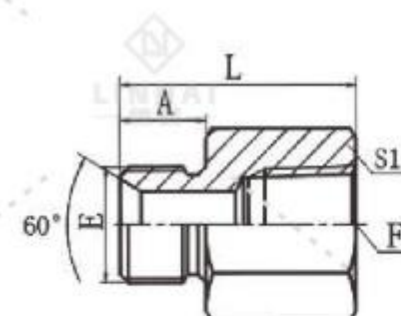

5BN

英管外螺纹60° 内锥或六角端面用组合垫密封/
美制布锥管内螺纹
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / NPT FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	L	S1
5BN-04	G1/4"X19	Z1/4"X18	12	31	19
5BN-06	G3/8"X19	Z3/8"X18	13.5	33	22
5BN-08	G1/2"X14	Z1/2"X14	16	42	30
5BN-12	G3/4"X14	Z3/4"X14	18.5	44.5	36
5BN-16	G1"X11	Z1"X11.5	20.5	52	41
5BN-20	G1.1/4"X11	Z1.1/4"X11.5	20.5	55	50
5BN-24	G1.1/2"X11	Z1.1/2"X11.5	23	60	60
5BN-32	G2"X11	Z2"X11.5	25.5	62	70

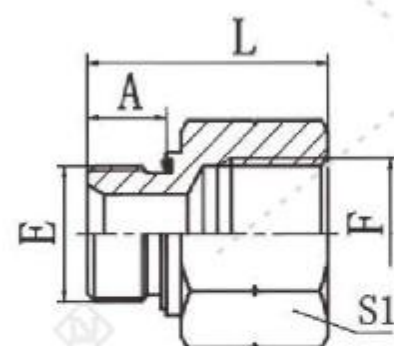


5B-WD

英管外螺纹胶垫密封/ 英管内螺纹ISO 1179
BSP MALE CAPTIVE SEAL /
BSP FEMALE ISO 1179



代号 PART NO.	螺 纹 THREAD		胶 垫 CAPTIVE E端	尺 寸 DIMENSIONS		
	E	F		A	L	S1
5B-02-04WD	G1/8"X28	G1/4"X19	WD-B02	8	30.5	19
5B-02-06WD	G1/8"X28	G3/8"X19	WD-B02	8	33.5	22
5B-04-02WD	G1/4"X19	G 1/8"X28	WD-B04	12	31.5	19
5B-04-06WD	G1/4"X19	G3/8"X19	WD-B04	12	37	22
5B-04-08WD	G1/4"X19	G1/2"X14	WD-B04	12	43	27
5B-06-04WD	G3/8"X19	G1/4"X19	WD-B06	12	37.5	22
5B-06-08WD	G3/8"X19	G1/2"X14	WD-B06	12	43.5	27
5B-08-04WD	G1/2"X14	G1/4"X19	WD-B08	14	38	27
5B-08-06WD	G1/2"X14	G3/8"X19	WD-B08	14	41	27
5B-08-12WD	G1/2"X14	G3/4"X14	WD-B08	14	46	36
5B-12-08WD	G3/4"X14	G1/2"X14	WD-B12	16	47.5	32
5B-12-16WD	G3/4"X14	G1"X11	WD-B12	16	53.5	41
5B-12-20WD	G3/4"X14	G1.1/4"X11	WD-B12	16	54.5	50
5B-16-12WD	G1"X11	G3/4"X14	WD-B16	18	50.5	41
5B-16-20WD	G1"X11	G1.1/4"X11	WD-B16	18	56.5	50
5B-20-16WD	G1.1/4"X11	G1"X11	WD-B20	20	57.5	50
5B-20-24WD	G1.1/4"X11	G1.1/2"X11	WD-B20	20	59.5	55
5B-20-32WD	G1.1/4"X11	G2"X11	WD-B20	20	64	70
5B-24-16WD	G1.1/2"X11	G1"X11	WD-B24	22	59.5	55
5B-24-20WD	G1.1/2"X11	G1.1/4"X11	WD-B24	22	60	55
5B-24-32WD	G1.1/2"X11	G2"X11	WD-B24	22	66	70




5BT

英管外螺纹60° 内锥或六角端面用组合垫密封/
英锥管内螺纹
BSP MALE DOUBLE USE FOR 60° CONE SEAT
OR BONDED SEAL / BSPT FEMALE



代号 PART NO.	螺 纹 THREAD		尺 寸 DIMENSIONS		
	E	F	A	L	S1
5BT-04-02	G1/4"X19	Rc1/8"X28	12	28	19
5BT-04	G1/4"X19	Rc1/4"X19	12	33.5	19
5BT-04-06	G1/4"X19	Rc3/8"X19	12	34	22
5BT-04-08	G1/4"X19	Rc1/2"X14	12	41	27
5BT-06-04	G3/8"X19	Rc1/4"X19	13.5	35	22
5BT-06	G3/8"X19	Rc3/8"X19	13.5	34	22
5BT-08-06	G1/2"X14	Rc3/8"X19	16	39.5	27
5BT-08	G1/2"X14	Rc1/2"X14	16	45	27
5BT-10-08	G5/8"X14	Rc1/2"X14	17.5	43.5	30
5BT-12-08	G3/4"X14	Rc1/2"X14	18.5	47.5	32
5BT-12	G3/4"X14	Rc3/4"X14	18.5	49	36
5BT-16-12	G1"X11	Rc3/4"X14	20.5	47.5	41
5BT-16	G1"X11	Rc1"X11	20.5	57	41
5BT-20	G1.1"X11	Rc1.1/4"X11	20.5	58.5	50
5BT-24	G1.1/2"X11	Rc1.1/2"X11	23	61	55




2B-G

英管螺纹60° 内锥/ 英管内螺纹表接头
BSP MALE 60° SEAT / BSP FEMALE
PRESSURE GAUGE CONNECTORS




代号 PART NO.	螺 纹 THREAD		紫铜片COPPER WASHER F端	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
2B-02-04G	G1/8"X28	G1/4"X19	DP-B04G	10	14.5	24.5	14	19
2B-04G	G1/4"X19	G1/4"X19	DP-B04G	12	14.5	26.5	19	19
2B-04-08G	G1/4"X19	G1/2"X14	DP-B08G	12	20	29	19	27
2B-06-04G	G3/8"X19	G1/4"X19	DP-B04G	13.5	14.5	30	22	19
2B-08-04G	G1/2"X14	G1/4"X19	DP-B04G	16	14.5	34.5	27	19
2B-08G	G1/2"X14	G1/2"X14	DP-B08G	16	20	37	27	27



1T-SP

英锥管外螺纹
BSPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1T-02SP	R1/8"X28	R1/8"X28	10	10	26	12
1T-02-04SP	R1/8"X28	R1/4"X19	10	14.5	30.5	14
1T-02-06SP	R1/8"X28	R3/8"X19	10	15	31	17
1T-04SP	R1/4"X19	R1/4"X19	14.5	14.5	34	14
1T-04-06SP	R1/4"X19	R3/8"X19	14.5	15	35	17
1T-06SP	R3/8"X19	R3/8"X19	15	15	36	17
1T-06-08SP	R3/8"X19	R1/2"X14	15	20	43	22
1T-08SP	R1/2"X14	R1/2"X14	20	20	46	22
1T-08-12SP	R1/2"X14	R3/4"X14	20	20	48	27
1T-12SP	R3/4"X14	R3/4"X14	20	20	48	27
1T-12-16SP	R3/4"X14	R1"X11	20	25.5	55.5	36
1T-16SP	R1"X11	R1"X11	25.5	25.5	61	36
1T-16-20SP	R1"X11	R1.1/4"X11	25.5	26.5	64.5	46
1T-20SP	R1.1/4"X11	R1.1/4"X11	26.5	26.5	65.5	46
1T-20-24SP	R1.1/4"X11	R1.1/2"X11	26.5	26.5	67	50
1T-24SP	R1.1/2"X11	R1.1/2"X11	26.5	26.5	67	50
1T-24-32SP	R1.1/2"X11	R2"X11	26.5	30	71.5	65
1T-32SP	R2"X11	R2"X11	30	30	75	65



1T9-SP

90° 弯英锥管外螺纹
90° ELBOW BSPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
1T9-02SP	R1/8"X28	R1/8"X28	21	21	11	
1T9-02-04SP	R1/8"X28	R1/4"X19	23.5	25.5	14	
1T9-04SP	R1/4"X19	R1/4"X19	25.5	25.5	14	
1T9-04-06SP	R1/4"X19	R3/8"X19	26.5	28.5	16	
1T9-04-08SP	R1/4"X19	R1/2"X14	30.5	36	22	
1T9-06-08SP	R3/8"X19	R1/2"X14	32.5	36	22	
1T9-06SP	R3/8"X19	R3/8"X19	28.5	28.5	16	
1T9-08SP	R1/2"X14	R1/2"X14	36	36	22	
1T9-08-12SP	R1/2"X14	R3/4"X14	39.5	43.5	27	
1T9-12SP	R3/4"X14	R3/4"X14	43.5	43.5	27	
1T9-12-16SP	R3/4"X14	R1"X11	48	50	33	
1T9-16SP	R1"X11	R1"X11	50	50	33	
1T9-16-20SP	R1"X11	R1.1/4"X11	56.5	57.5	41	
1T9-20SP	R1.1/4"X11	R1.1/4"X11	57.5	57.5	41	
1T9-24SP	R1.1/2"X11	R1.1/2"X11	62.5	62.5	48	
1T9-32SP	R2"X11	R2"X11	68	75	63	

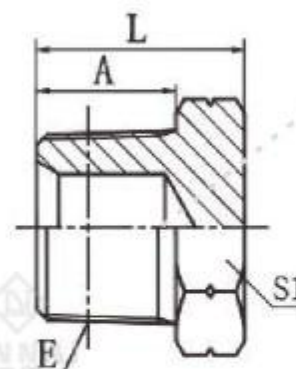

4T-SP

英锥管外螺纹堵头
BSPT MALE PLUG


代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS		
	E	A	L	S1
4T-02SP	R1/8"X28	10	16	12
4T-04SP	R1/4"X19	14.5	20	14
4T-06SP	R3/8"X19	15	21	17
4T-08SP	R1/2"X14	20	27	22
4T-12SP	R3/4"X14	20	29	27
4T-16SP	R1"X11	25.5	36.5	36
4T-20SP	R1.1/4"X11	26.5	38.5	46
4T-24SP	R1.1/2"X11	26.5	42	50
4T-32SP	R2"X11	30	47	65

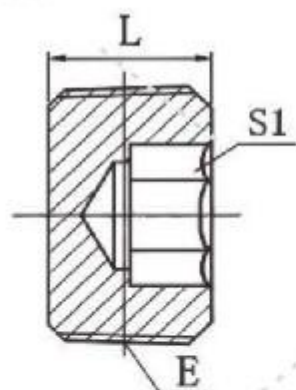

4TN

英锥管外螺纹内六角堵头
BSPT MALE HOLLOW HEX PLUG


代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS	
	E	L	S1
4TN-02	R1/8"X28	8	5
4TN-04	R1/4"X19	10	6
4TN-06	R3/8"X19	12	8
4TN-08	R1/2"X14	15	10
4TN-12	R3/4"X14	18	12
4TN-20	R1.1/4"X11	22	22



5T-SP

英锥管外螺纹/ 英锥管内螺纹
BSPT MALE / BSPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	L	S1
5T-02-04SP	R1/8"X28	Rc1/4"X19	11	32.5	19
5T-04-02SP	R1/4"X19	Rc1/8"X28	14.5	20.5	14
5T-04SP	R1/4"X19	Rc1/4"X19	14.5	36	19
5T-04-06SP	R1/4"X19	Rc3/8"X19	14.5	38	22
5T-06-02SP	R3/8"X19	Rc1/8"X28	15	23	19
5T-06SP	R3/8"X19	Rc3/8"X19	15	38.5	22
5T-06-08SP	R3/8"X19	Rc1/2"X14	15	44	27
5T-08-04SP	R1/2"X14	Rc1/4"X19	20	30	24
5T-08-06SP	R1/2"X14	Rc3/8"X19	20	30	24
5T-08SP	R1/2"X14	Rc1/2"X14	20	49	27
5T-08-12SP	R1/2"X14	Rc3/4"X14	20	51	36
5T-12-06SP	R3/4"X14	Rc3/8"X19	20	31	30
5T-12-08SP	R3/4"X14	Rc1/2"X14	20	31	30
5T-12SP	R3/4"X14	Rc3/4"X14	20	51	36
5T-12-16SP	R3/4"X14	Rc1"X11	20	56.5	41
5T-16-08SP	R1"X11	Rc1/2"X14	25.5	37	36
5T-16-12SP	R1"X11	Rc3/4"X14	25.5	37	36
5T-16SP	R1"X11	Rc1"X11	25.5	60	41
5T-16-20SP	R1"X11	Rc1.1/4"X11	25.5	64	50
5T-20-12SP	R1.1/4"X11	Rc3/4"X14	26.5	38	46
5T-20-16SP	R1.1/4"X11	Rc1"X11	26.5	38	46
5T-20SP	R1.1/4"X11	Rc1.1/4"X11	26.5	64.5	50
5T-24-16SP	R1.1/2"X11	Rc1"X11	26.5	41	50
5T-24-20SP	R1.1/2"X11	Rc1.1/4"X11	26.5	41	50
5T-32-20SP	R2"X11	Rc1.1/4"X11	30	45	65
5T-32-24SP	R2"X11	Rc1.1/2"X11	30	45	65



5T9-SP

90° 弯英锥管外螺纹/ 英锥管内螺纹
90° ELBOW BSPT MALE / BSPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
5T9-02SP	R1/8"X28	Rc1/8"X28	24.5	23	16
5T9-04SP	R1/4"X19	Rc1/4"X19	28.5	25	19
5T9-06SP	R3/8"X19	Rc3/8"X19	33.5	25	24
5T9-08SP	R1/2"X14	Rc1/2"X14	40.8	31.5	30
5T9-12SP	R3/4"X14	Rc3/4"X14	47.5	37	33
5T9-16SP	R1"X11	Rc1"X11	56.5	43	41
5T9-20SP	R1.1/4"X11	Rc1.1/4"X11	61	50	48
5T9-24SP	R1.1/2"X11	Rc1.1/2"X11	75	55	63

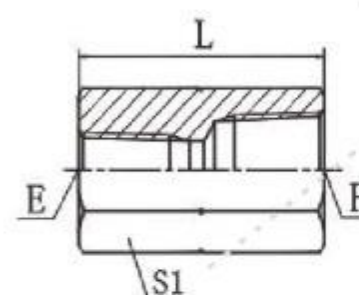

7T

英锥管内螺纹
BSPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS	
	E	F	L	S1
7T-02	Rc1/8"X28	Rc1/8"X28	20	14
7T-02-04	Rc1/8"X28	Rc1/4"X19	30	19
7T-04	Rc1/4"X19	Rc1/4"X19	30	19
7T-04-06	Rc1/4"X19	Rc3/8"X19	30	22
7T-04-08	Rc1/4"X19	Rc1/2"X14	40	27
7T-06	Rc3/8"X19	Rc3/8"X19	30	22
7T-06-08	Rc3/8"X19	Rc1/2"X14	40	27
7T-06-12	Rc3/8"X19	Rc3/4"X14	37	36
7T-08	Rc1/2"X14	Rc1/2"X14	40	27
7T-08-12	Rc1/2"X14	Rc3/4"X14	42	36
7T-12	Rc3/4"X14	Rc3/4"X14	42	36
7T-12-16	Rc3/4"X14	Rc1"X11	50	41
7T-16	Rc1"X11	Rc1"X11	50	41
7T-16-20	Rc1"X11	Rc1.1/4"X11	52	50
7T-20	Rc1.1/4"X11	Rc1.1/4"X11	55	50
7T-24	Rc1.1/2"X11	Rc1.1/2"X11	55	55
7T-32	Rc2"X11	Rc2"X11	65	70



7T9-PK

90° 弯英锥管内螺纹
90° ELBOW BSPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
7T9-02PK	Rc1/8"X28	Rc1/8"X28	20	20	16
7T9-02-04PK	Rc1/8"X28	Rc1/4"X19	20	22.5	19
7T9-04PK	Rc1/4"X19	Rc1/4"X19	22.5	22.5	19
7T9-06PK	Rc3/8"X19	Rc3/8"X19	26	26	24
7T9-08PK	Rc1/2"X14	Rc1/2"X14	31	31	27
7T9-12PK	Rc3/4"X14	Rc3/4"X14	34	34	33
7T9-16PK	Rc1"X11	Rc1"X11	42	42	41
7T9-20PK	Rc1.1/4"X11	Rc1.1/4"X11	48	48	50
7T9-24PK	Rc1.1/2"X11	Rc1.1/2"X11	53	53	60
7T9-32PK	Rc2"X11	Rc2"X11	62	62	70

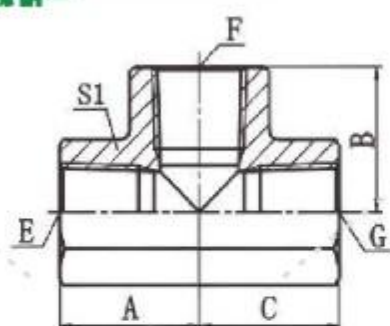

GT-PK

英锥管内螺纹三通
BSPT FEMALE TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
GT-02PK	Rc1/8"X28	Rc1/8"X28	Rc1/8"X28	20	20	20	16
GT-04PK	Rc1/4"X19	Rc1/4"X19	Rc1/4"X19	22.5	22.5	22.5	19
GT-06PK	Rc3/8"X19	Rc3/8"X19	Rc3/8"X19	26	26	26	24
GT-08PK	Rc1/2"X14	Rc1/2"X14	Rc1/2"X14	31	31	31	27
GT-12PK	Rc3/4"X14	Rc3/4"X14	Rc3/4"X14	34	34	34	33
GT-16PK	Rc1"X11	Rc1"X11	Rc1"X11	42	42	42	41
GT-20PK	Rc1.1/4"X11	Rc1.1/4"X11	Rc1.1/4"X11	48	48	48	50
GT-24PK	Rc1.1/2"X11	Rc1.1/2"X11	Rc1.1/2"X11	53	53	53	60
GT-32K	Rc2"X11	Rc2"X11	Rc2"X11	62	62	62	70



1N9

90° 弯布锥管外螺纹
90° ELBOW NPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
1N9-02	Z1/8"X27	Z1/8"X27	21	21	11
1N9-02-04	Z1/8"X27	Z1/4"X18	23.5	25.5	14
1N9-04	Z1/4"X18	Z1/4"X18	25.5	25.5	14
1N9-04-06	Z1/4"X18	Z3/8"X18	28	31	19
1N9-04-08	Z1/4"X18	Z1/2"X14	30.5	36.5	22
1N9-06	Z3/8"X18	Z3/8"X18	31	31	19
1N9-06-08	Z3/8"X18	Z1/2"X14	33.8	37.3	22
1N9-08	Z1/2"X14	Z1/2"X14	37.3	37.3	22
1N9-08-12	Z1/2"X14	Z3/4"X14	40	44	27
1N9-12	Z3/4"X14	Z3/4"X14	44	44	27
1N9-12-16	Z3/4"X14	Z1"X11.5	46.5	50	33
1N9-16	Z1"X11.5	Z1"X11.5	50	50	33
1N9-20	Z1.1/4"X11.5	Z1.1/4"X11.5	54	54	41
1N9-24	Z1.1/2"X11.5	Z1.1/2"X11.5	63	63	48
1N9-32	Z2"X11.5	Z2"X11.5	68	68	63

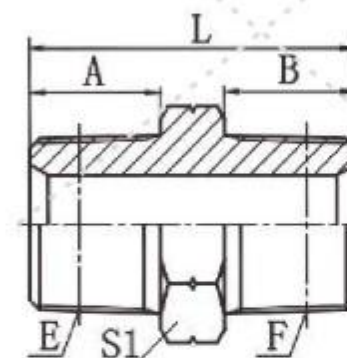

1N

美制布锥管外螺纹
NPT MALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1N-02	Z1/8"X27	Z1/8"X27	10.5	10.5	27	12
1N-02-04	Z1/8"X27	Z1/4"X18	10.5	15	31	17
1N-02-06	Z1/8"X27	Z3/8"X18	10.5	16	32	19
1N-04	Z1/4"X18	Z1/4"X18	15	15	35	17
1N-04-06	Z1/4"X18	Z3/8"X18	15	16	37	19
1N-06	Z3/8"X18	Z3/8"X18	16	16	38	19
1N-06-08	Z3/8"X18	Z1/2"X14	16	19.5	43.5	22
1N-06-12	Z3/8"X18	Z3/4"X14	16	19.5	45.5	27
1N-08	Z1/2"X14	Z1/2"X14	19.5	19.5	47	22
1N-08-12	Z1/2"X14	Z3/4"X14	19.5	19.5	49	27
1N-08-16	Z1/2"X14	Z1"X11.5	19.5	25.5	56	36
1N-12	Z3/4"X14	Z3/4"X14	19.5	19.5	49	27
1N-12-16	Z3/4"X14	Z1"X11.5	19.5	25.5	55	36
1N-12-20	Z3/4"X14	Z1.1/4"X11.5	19.5	26.5	59	46
1N-16	Z1"X11.5	Z1"X11.5	25.5	25.5	61	36
1N-16-20	Z1"X11.5	Z1.1/4"X11.5	25.5	26.5	64	46
1N-16-24	Z1"X11.5	Z1.1/2"X11.5	25.5	27.5	68	50
1N-20	Z1.1/4"X11.5	Z1.1/4"X11.5	26.5	26.5	65	46
1N-20-24	Z1.1/4"X11.5	Z1.1/2"X11.5	26.5	27.5	69	50
1N-24	Z1.1/2"X11.5	Z1.1/2"X11.5	27.5	27.5	69	50
1N-24-32	Z1.1/2"X11.5	Z2"X11.5	27.5	27.5	72	65
1N-32	Z2"X11.5	Z2"X11.5	27.5	27.5	71	65

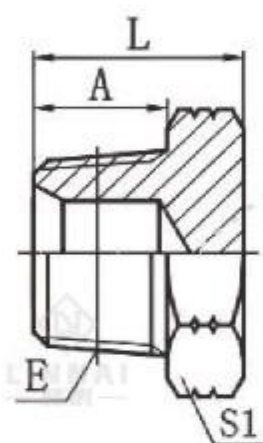

4N

美制布锥管外螺纹堵头
NPT MALE PLUG


代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS			
	E	A	L	S1	
4N-02	Z1/8"X27	10.5	16	12	
4N-04	Z1/4"X18	15	20	17	
4N-06	Z3/8"X18	16	21	19	
4N-08	Z1/2"X14	19.5	27	22	
4N-12	Z3/4"X14	19.5	29.5	27	
4N-16	Z1"X11.5	25.5	36.5	36	
4N-24	Z1.1/2"X11.5	27.5	43	50	
4N-32	Z2"X11.5	27.5	43.5	65	

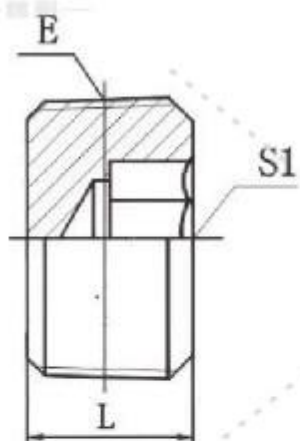

4NN

美布锥管外螺纹内六角堵头
NPT MALE HOLLOW HEX PLUG


代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS	
	E	L	S1
4NN-02	Z1/8"X27	8	5
4NN-04	Z1/4"X18	10	6
4NN-06	Z3/8"X18	12	8
4NN-08	Z1/2"X14	15	10
4NN-12	Z3/4"X14	16	12

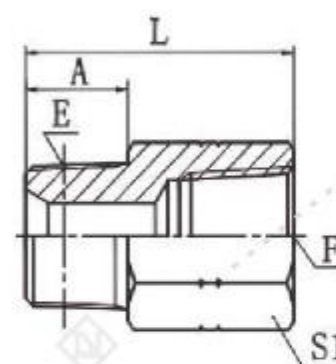

5N

布锥管外螺纹/ 布锥管内螺纹
NPT MALE / NPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	L	S1
5N-02	Z1/8"X27	Z1/8"X27	10.5	25.5	17
5N-02-04	Z1/8"X27	Z1/4"X18	10.5	31	19
5N-02-06	Z1/8"X27	Z3/8"X18	11	31	24
5N-04-02	Z1/4"X18	Z1/8"X27	15	22	17
5N-04	Z1/4"X18	Z1/4"X18	15	35.3	19
5N-04-06	Z1/4"X18	Z3/8"X18	15	36.6	24
5N-06-02	Z3/8"X18	Z1/8"X27	16	22	19
5N-06-04	Z3/8"X18	Z1/4"X18	16	22	19
5N-06	Z3/8"X18	Z3/8"X18	16	37.6	24
5N-06-08	Z3/8"X18	Z1/2"X14	17	43.7	30
5N-06-12	Z3/8"X18	Z3/4"X14	17	47	36
5N-08-04	Z1/2"X14	Z1/4"X18	19.5	28	24
5N-08-06	Z1/2"X14	Z3/8"X18	19.5	28.5	24
5N-08	Z1/2"X14	Z1/2"X14	19.5	47.5	30
5N-08-12	Z1/2"X14	Z3/4"X14	19.5	49	36
5N-12-06	Z3/4"X14	Z3/8"X18	19.5	30.5	27
5N-12-08	Z3/4"X14	Z1/2"X14	19.5	30.5	27
5N-12	Z3/4"X14	Z3/4"X14	19.5	49	36
5N-12-16	Z3/4"X14	Z1"X11.5	19.5	55.4	41
5N-16-08	Z1"X11.5	Z1/2"X14	25.5	35.5	36
5N-16-12	Z1"X11.5	Z3/4"X14	25.5	36.5	36
5N-16	Z1"X11.5	Z1"X11.5	25.5	60.7	41
5N-16-20	Z1"X11.5	Z1.1/4"X11.5	25.5	63.5	50
5N-20-12	Z1.1/4"X11.5	Z3/4"X14	26.5	38.5	46
5N-20-16	Z1.1/4"X11.5	Z1"X11.5	26.5	41	46
5N-20	Z1.1/4"X11.5	Z1.1/4"X11.5	26.5	61.5	50
5N-20-24	Z1.1/4"X11.5	Z1.1/2"X11.5	26.5	62.5	60
5N-24-16	Z1.1/2"X11.5	Z1"X11.5	27.5	41.5	50
5N-24-20	Z1.1/2"X11.5	Z1.1/4"X11.5	27.5	41	50
5N-24	Z1.1/2"X11.5	Z1.1/2"X11.5	27.5	62.5	65
5N-24-32	Z1.1/2"X11.5	Z2"X11.5	27.5	66.5	70
5N-32-20	Z2"X11.5	Z1.1/4"X11.5	27.5	44.5	65
5N-32-24	Z2"X11.5	Z1.1/2"X11.5	27.5	45	65
5N-32	Z2"X11.5	Z2"X11.5	27.5	62.5	70



5N9

90° 弯布锥管外螺纹/ 布锥管内螺纹
90° ELBOW NPT MALE / NPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
5N9-02	Z1/8"X27	Z1/8"X27	24.5	17.8	16	
5N9-04-02	Z1/4"X18	Z1/8"X27	26.5	16.8	16	
5N9-04	Z1/4"X18	Z1/4"X18	28	22.4	19	
5N9-04-06	Z1/4"X18	Z3/8"X18	31	25	24	
5N9-06-04	Z3/8"X18	Z1/4"X18	31	22.4	19	
5N9-06	Z3/8"X18	Z3/8"X18	33.5	25	24	
5N9-08	Z1/2"X14	Z1/2"X14	41.2	31.2	30	
5N9-12-08	Z3/4"X14	Z1/2"X14	45	31.2	30	
5N9-12	Z3/4"X14	Z3/4"X14	45.2	34.5	33	
5N9-16	Z1"X11.5	Z1"X11.5	54.5	41.1	41	
5N9-20	Z1.1/4"X11.5	Z1.1/4"X11.5	63	43.2	48	
5N9-24	Z1.1/2"X11.5	Z1.1/2"X11.5	71.5	52.8	63	
5N9-32	Z2"X11.5	Z2"X11.5	73.5	62	65	

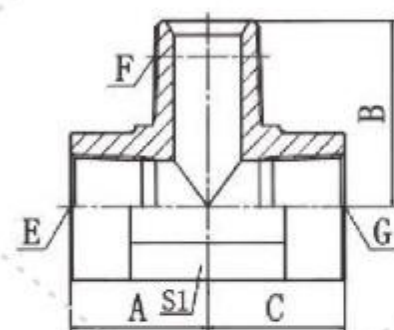

JN

布锥管内螺纹/ 布锥管外螺纹三通
NPT FEMALE / NPT MALE BRANCH TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
JN-02	Z1/8"X27	Z1/8"X27	Z1/8"X27	17.8	24.5	17.8	14
JN-04	Z1/4"X18	Z1/4"X18	Z1/4"X18	22.4	28	22.4	19
JN-06	Z3/8"X18	Z3/8"X18	Z3/8"X18	25	33.5	25	24
JN-08	Z1/2"X14	Z1/2"X14	Z1/2"X14	31.2	41.2	31.2	30
JN-12	Z3/4"X14	Z3/4"X14	Z3/4"X14	34.5	45.2	34.5	33

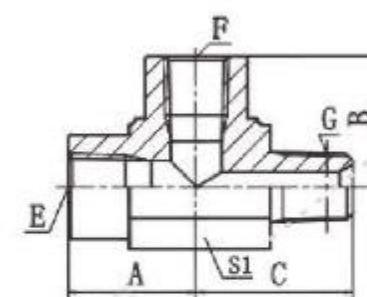

HN

美制布锥管内螺纹/ 布锥管外螺纹主支三通
NPT FEMALE / NPT MALE RUN TEE


代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
HN-02	Z1/8"X27	Z1/8"X27	Z1/8"X27	20	20	24.5	16
HN-04	Z1/4"X18	Z1/4"X18	Z1/4"X18	25	25	28.5	19
HN-06	Z3/8"X18	Z3/8"X18	Z3/8"X18	27	27	33.5	24
HN-08	Z1/2"X14	Z1/2"X14	Z1/2"X14	35	35	42.5	30
HN-12	Z3/4"X14	Z3/4"X14	Z3/4"X14	37	37	45.2	33
HN-20	Z1.1/4"X11.5	Z1.1/4"X11.5	Z1.1/4"X11.5	48	48	58.5	48

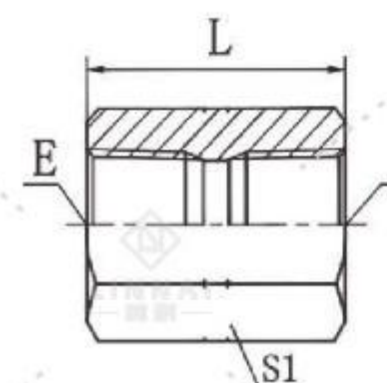

7N

美制布锥管内螺纹
NPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS	
	E	F	L	S1
7N-02	Z1/8"X27	Z1/8"X27	24	17
7N-02-04	Z1/8"X27	Z1/4"X18	27	19
7N-02-06	Z1/8"X27	Z3/8"X18	30	22
7N-04	Z1/4"X18	Z1/4"X18	29	19
7N-04-06	Z1/4"X18	Z3/8"X18	31	22
7N-06	Z3/8"X18	Z3/8"X18	29	22
7N-06-08	Z3/8"X18	Z1/2"X14	38	30
7N-06-12	Z3/8"X18	Z3/4"X14	40	36
7N-08	Z1/2"X14	Z1/2"X14	38	30
7N-08-12	Z1/2"X14	Z3/4"X14	43	36
7N-12	Z3/4"X14	Z3/4"X14	39	36
7N-12-16	Z3/4"X14	Z1"X11.5	45.5	41
7N-16	Z1"X11.5	Z1"X11.5	48	41
7N-20	Z1.1/4"X11.5	Z1.1/4"X11.5	49	50
7N-24	Z1.1/2"X11.5	Z1.1/2"X11.5	49	60
7N-32	Z2"X11.5	Z2"X11.5	50	70



7N9-PK

90° 弯美制布锥管内螺纹
90° ELBOW NPT FEMALE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
7N9-02PK	Z1/8"X27	Z1/8"X27	20	20	16	
7N9-02-04PK	Z1/8"X27	Z1/4"X18	20	22.5	19	
7N9-04PK	Z1/4"X18	Z1/4"X18	22.5	22.5	19	
7N9-04-06PK	Z1/4"X18	Z3/8"X18	25	26	24	
7N9-06PK	Z3/8"X18	Z3/8"X18	26	26	24	
7N9-08PK	Z1/2"X14	Z1/2"X14	31	31	27	
7N9-08-12PK	Z1/2"X14	Z3/4"X14	34	34	33	
7N9-12PK	Z3/4"X14	Z3/4"X14	34	34	33	
7N9-12-16PK	Z3/4"X14	Z1"X11.5	42	42	41	
7N9-16PK	Z1"X11.5	Z1"X11.5	42	42	41	
7N9-20PK	Z1.1/4"X11.5	Z1.1/4"X11.5	48	48	50	
7N9-24PK	Z1.1/2"X11.5	Z1.1/2"X11.5	53	53	60	
7N9-32PK	Z2"X11.5	Z2"X11.5	62	62	70	

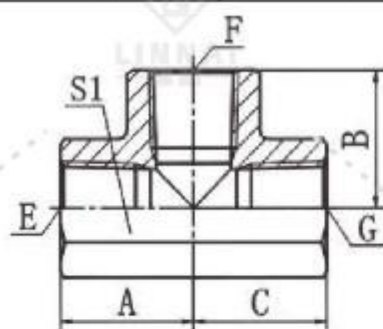

GN-PK

美制布锥管内螺纹三通
NPT FEMALE TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
GN-02PK	Z1/8"X27	Z1/8"X27	Z1/8"X27	20	20	20	16
GN-04PK	Z1/4"X18	Z1/4"X18	Z1/4"X18	22.5	22.5	22.5	19
GN-06PK	Z3/8"X18	Z3/8"X18	Z3/8"X18	26	26	26	24
GN-08PK	Z1/2"X14	Z1/2"X14	Z1/2"X14	31	31	31	27
GN-12PK	Z3/4"X14	Z3/4"X14	Z3/4"X14	34	34	34	33
GN-16PK	Z1"X11.5	Z1"X11.5	Z1"X11.5	42	42	42	41
GN-20PK	Z1.1/4"X11.5	Z1.1/4"X11.5	Z1.1/4"X11.5	48	48	48	50
GN-24PK	Z1.1/2"X11.5	Z1.1/2"X11.5	Z1.1/2"X11.5	53	53	53	60
GN-32PK	Z2"X11.5	Z2"X11.5	Z2"X11.5	62	62	62	70

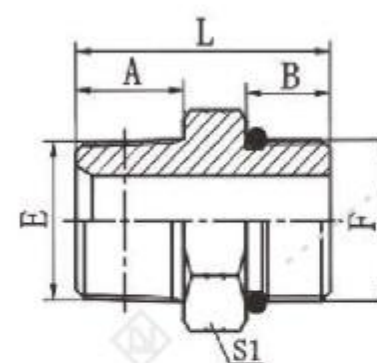


1NO

美制布锥管外螺纹/
美制SAE外螺纹带O形圈轻系列

ISO11926-3 NPT MALE /
SAE O-RING BOSS L-SERIES ISO 11926-3


代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1NO-04	Z1/4"X18	7/16"X20	O904	15	9.1	30	14
1NO-04-06	Z1/4"X18	9/16"X18	O906	15	9.9	31	17
1NO-06-04	Z3/8"X18	7/16"X20	O904	16	9.1	31	19
1NO-06	Z3/8"X18	9/16"X18	O906	16	9.9	32	19
1NO-06-08	Z3/8"X18	3/4"X16	O908	16	11.1	35.5	22
1NO-08-10	Z1/2"X14	7/8"X14	O910	19.5	12.7	42	27
1NO-08-12	Z1/2"X14	1.1/16"X12	O912	19.5	15.1	45.5	32
1NO-12-10	Z3/4"X14	7/8"X14	O910	19.5	12.7	43	30
1NO-12	Z3/4"X14	1.1/16"X12	O912	19.5	15.1	45.5	32
1NO-16	Z1"X11.5	1.5/16"X12	O916	25.5	15.1	51.5	38
1NO-20-16	Z1.1/4"X11.5	1.5/16"X12	O916	26.5	15.1	54.5	46
1NO-20	Z1.1/4"X11.5	1.5/8"X12	O920	26.5	15.1	56.5	50
1NO-24	Z1.1/2"X11.5	1.7/8"X12	O924	27.5	15.1	57.5	55



5NO

美制布锥管外螺纹/ 美制SAE内螺纹ISO 11926-1
NPT MALE / SAE FEMALE ISO 11926-1


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	L	S1	
5NO-02-04	Z1/8"X27	7/16"X20	10.5	29.5	17	
5NO-02-05	Z1/8"X27	1/2"X20	10.5	30.5	17	
5NO-04	Z1/4"X18	7/16"X20	15	34	17	
5NO-04-06	Z1/4"X18	9/16"X18	15	36	19	
5NO-04-08	Z1/4"X18	3/4"X16	15	41	27	
5NO-06	Z3/8"X18	9/16"X18	16	34.5	19	
5NO-06-08	Z3/8"X18	3/4"X16	16	40	24	
5NO-08-06	Z1/2"X14	9/16"X18	19.5	27.5	24	
5NO-08	Z1/2"X14	3/4"X16	19.5	41.5	27	
5NO-08-10	Z1/2"X14	7/8"X14	19.5	46.5	30	
5NO-12-08	Z3/4"X14	3/4"X16	19.5	29.5	30	
5NO-12-10	Z3/4"X14	7/8"X14	19.5	42.5	30	
5NO-12	Z3/4"X14	1.1/16"X12	19.5	47	36	
5NO-16-12	Z1"X11.5	1.1/16"X12	25.5	36.5	36	
5NO-16	Z1"X11.5	1.5/16"X12	25.5	53	41	
5NO-20	Z1.1/4"X11.5	1.5/8"X12	26.5	55.5	50	



50N

美制SAE外螺纹带O形圈轻系列ISO 11926-3 /
美制布锥管内螺纹
SAE O-RING BOSS L-SERIES ISO 11926-3/NPT FEMALE



代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS		
	E	F		A	L	S1
50N-02	5/16"X24	Z1/8"X27	O902	7.54	24.5	17
50N-02-04	5/16"X24	Z1/4"x18	O902	7.54	29	19
50N-03-02	3/8"X24	Z1/8"X27	O903	7.54	24.5	17
50N-03-04	3/8"X24	Z1/4"x18	O903	7.54	29	19
50N-04-02	7/16"X20	Z1/8"X27	O904	9.1	24.5	17
50N-04	7/16"X20	Z1/4"x18	O904	9.1	30.5	19
50N-05-02	1/2"X20	Z1/8"X27	O905	9.1	26	17
50N-06-04	9/16"X18	Z1/4"x18	O906	9.9	31.5	19
50N-08-04	3/4"X16	Z1/4"x18	O908	11.1	32.5	22
50N-08-06	3/4"X16	Z3/8"x18	O908	11.1	34	22
50N-08	3/4"X16	Z1/2"X14	O908	11.1	40	30
50N-08-12	3/4"X16	Z3/4"x14	O908	11.1	40.1	36
50N-10-08	7/8"X14	Z1/2"x14	O910	12.7	41.5	30
50N-10-06	7/8"X14	Z3/8"x18	O910	12.7	35.5	27
50N-10-12	7/8"X14	Z3/4"x14	O910	12.7	41	36
50N-12-08	1.1/16"X12	Z1/2"x14	O912	15.1	42	32
50N-12	1.1/16"X12	Z3/4"x14	O912	15.1	45.5	36
50N-12-16	1.1/16"X12	Z1"X11.5	O912	15.1	50.5	41
50N-16-12	1.5/16"X12	Z3/4"x14	O916	15.1	43	38
50N-16	1.5/16"X12	Z1"X11.5	O916	15.1	51.5	41
50N-20-16	1.5/8"X12	Z1"X11.5	O920	15.1	40	50
50N-20	1.5/8"X12	Z1.1/4"X11.5	O920	15.1	53.5	50
50N-24-16	1.7/8"X12	Z1"X11.5	O924	15.1	34	55
50N-24-20	1.7/8"X12	Z1.1/4"X11.5	O924	15.1	48	55
50N-24	1.7/8"X12	Z1.1/2"X11.5	O924	15.1	53.5	60
50N-32	2.1/2"X12	2"X11.5	O932	15.1	50	70



5GN

英管外螺纹O形圈/美制布锥管内螺纹
BSP MALE O-RING/NPT FEMALE


代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS		
	E	F		A	L	S1
5GN-02	G1/8"X28	Z1/8"X27	O011	9.5	24.5	17
5GN-02-04	G1/8"X28	Z1/4"X18	O011	9.5	29.5	19
5GN-04-02	G1/4"X19	Z1/8"X27	O111	11	26	19
5GN-04	G1/4"X19	Z1/4"X18	O111	11	31	19
5GN-04-06	G1/4"X19	Z3/8"X18	O111	11	33	22
5GN-06	G3/8"X19	Z3/8"X18	O113	11.5	35	22
5GN-08-04	G1/2"X14	Z1/4"X18	O115	14	27	27
5GN-08-06	G1/2"X14	Z3/8"X18	O115	14	34	27
5GN-08	G1/2"X14	Z1/2"X14	O115	14	43	30
5GN-12	G3/4"X14	Z3/4"X14	O119	15.5	44.5	36
5GN-16	G1"X11	Z1"X11.5	O217	18	54.5	41
5GN-20	G1.1/4"X11	Z1.1/4"X11.5	O222	20	55.5	50
5GN-24	G1.1/2"X11	Z1.1/2"X11.5	O224	21.5	57	60

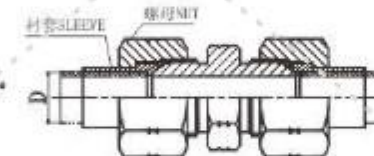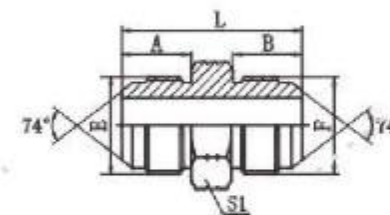

1J
美制JIC外螺纹74° 外锥
JIC MALE 74° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1J-02	5/16"X24	5/16"X24	11.4	11.4	29	12
1J-02-03	5/16"X24	3/8"X24	11.4	12.2	29.5	12
1J-03	3/8"X24	3/8"X24	12.2	12.2	30.5	12
1J-04	7/16"X20	7/16"X20	14	14	34	12
1J-04-05	7/16"X20	1/2"X20	14	14	34	14
1J-04-08	7/16"X20	3/4"X16	14	16.7	38.5	22
1J-05	1/2"X20	1/2"X20	14	14	34	14
1J-05-06	1/2"X20	9/16"X18	14	14.1	34	17
1J-05-08	1/2"X20	3/4"X16	14	16.7	38.5	22
1J-05-10	1/2"X20	7/8"X14	14	19.3	41	24
1J-06	9/16"X18	9/16"X18	14.4	14.1	34.2	17
1J-06-08	9/16"X18	3/4"X16	14.1	16.7	38.5	22
1J-06-10	9/16"X18	7/8"X14	14.1	19.3	41.5	24
1J-06-12	9/16"X18	1.1/16"X12	14.1	21.9	46	30
1J-08	3/4"X16	3/4"X16	16.7	16.7	42	22
1J-08-10	3/4"X16	7/8"X14	16.7	19.3	44	24
1J-08-12	3/4"X16	1.1/16"X12	16.7	21.9	48.5	30
1J-08-16	3/4"X16	1.5/16"X12	16.7	23.1	51	36
1J-10	7/8"X14	7/8"X14	19.3	19.3	46.5	24
1J-10-12	7/8"X14	1.1/16"X12	19.3	21.9	51	30
1J-10-16	7/8"X14	1.5/16"X12	19.3	23.1	53.5	36
1J-12	1.1/16"X12	1.1/16"X12	21.9	21.9	54	30
1J-12-14	1.1/16"X12	1.3/16"X12	21.9	22.6	55.5	32
1J-12-16	1.1/16"X12	1.5/16"X12	21.9	23.1	56	36
1J-14	1.3/16"X12	1.3/16"X12	22.6	22.6	56	32
1J-14-16	1.3/16"X12	1.5/16"X12	22.6	23.1	56.5	36
1J-16	1.5/16"X12	1.5/16"X12	23.1	23.1	57	36
1J-16-20	1.5/16"X12	1.5/8"X12	23.1	24.3	60.5	46
1J-16-24	1.5/16"X12	1.7/8"X12	23.1	27.5	65.5	50
1J-20	1.5/8"X12	1.5/8"X12	24.3	24.3	62	46
1J-20-24	1.5/8"X12	1.7/8"X12	24.3	27.5	67	50
1J-20-32	1.5/8"X12	2.1/2"X12	24.3	33.9	75	65
1J-24	1.7/8"X12	1.7/8"X12	27.5	27.5	70	50
1J-24-32	1.7/8"X12	2.1/2"X12	27.5	33.9	78.5	65
1J-32	2.1/2"X12	2.1/2"X12	33.9	33.9	85	65

注：螺母及衬套需另行订货。管子直径D为公制时，选用螺母及衬套分别选用NB200、NB500。管子直径为英制时，选用螺母及衬套分别选用NB200、NB300。Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

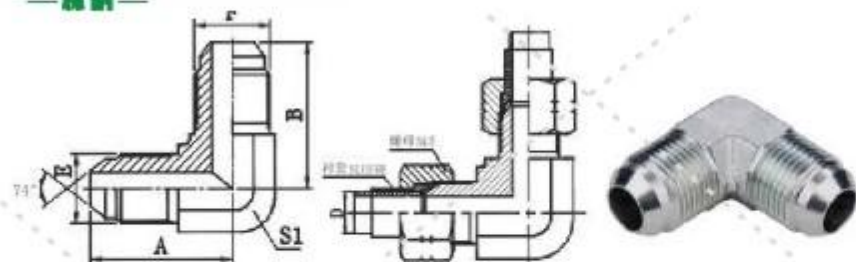


1J9

90° 弯美制JIC外螺纹74° 外锥
90° ELBOW JIC MALE 74° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
1J9-02	5/16"X24	5/16"X24	20.5	20.5	11	
1J9-03	3/8"X24	3/8"X24	22	22	11	
1J9-04	7/16"X20	7/16"X20	24.5	24.5	11	
1J9-05	1/2"X20	1/2"X20	26.6	26.6	14	
1J9-06	9/16"X18	9/16"X18	26.9	26.9	14	
1J9-06-08	9/16"X18	3/4"X16	30	32	19	
1J9-06-10	9/16"X18	7/8"X14	32	37.8	22	
1J9-08	3/4"X16	3/4"X16	32	32	19	
1J9-08-10	3/4"X16	7/8"X14	34.8	37.8	22	
1J9-10	7/8"X14	7/8"X14	37.8	37.8	22	
1J9-10-12	7/8"X14	1.1/16"X12	41	44.2	27	
1J9-12	1.1/16"X12	1.1/16"X12	44.2	44.2	27	
1J9-14	1.3/16"X12	1.3/16"X12	47.5	47.5	30	
1J9-16	1.5/16"X12	1.5/16"X12	49	49	33	
1J9-20	1.5/8"X12	1.5/8"X12	55.5	55.5	41	
1J9-24	1.7/8"X12	1.7/8"X12	62.5	62.5	48	
1J9-32	2.1/2"X12	2.1/2"X12	78	78	63	

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。
Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

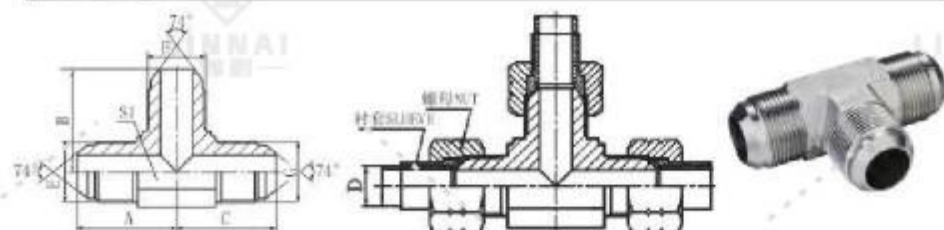


AJ

美制JIC外螺纹74° 外锥三通
JIC MALE 74° CONE TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
AJ-04	7/16"X20	7/16"X20	7/16"X20	24.5	24.5	24.5	11
AJ-04-06-04	7/16"X20	9/16"X18	7/16"X20	26.6	26.9	26.6	14
AJ-05	1/2"X20	1/2"X20	1/2"X20	26	26	26	14
AJ-06-04-06	9/16"X18	7/16"X20	9/16"X18	26.9	26.6	26.9	14
AJ-06	9/16"X18	9/16"X18	9/16"X18	26.9	26.9	26.9	14
AJ-08-06-08	3/4"X16	9/16"X18	3/4"X16	32	30	32	19
AJ-10	7/8"X14	7/8"X14	7/8"X14	37.8	37.8	37.8	22
AJ-12	1.1/16"X12	1.1/16"X12	1.1/16"X12	44.2	44.2	44.2	27
AJ-16	1.5/16"X12	1.5/16"X12	1.5/16"X12	49	49	49	33
AJ-16-12-16	1.5/16"X12	1.1/16"X12	1.5/16"X12	49	48	49	33
AJ-20	1.5/8"X12	1.5/8"X12	1.5/8"X12	56.5	56.5	56.5	41
AJ-24	1.7/8"X12	1.7/8"X12	1.7/8"X12	63	63	63	48
AJ-32	2.1/2"X12	2.1/2"X12	2.1/2"X12	78	78	78	63

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。
Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

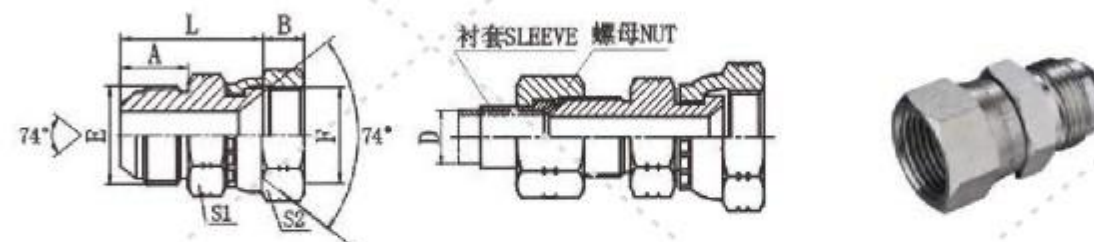


2J

美制JIC外螺纹74° 外锥/JIC内螺纹74° 内锥
JIC MALE 74° CONE /JIC FEMALE 74° SEAT

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2J-04	7/16"X20	7/16"X20	14	9	28	12	15
2J-04-05	7/16"X20	7/16"X20	14	9.5	28.5	12	17
2J-04-06	7/16"X20	9/16"X18	14	10.5	28.5	14	19
2J-04-08	7/16"X20	3/4"X16	14	11	30.5	19	24
2J-05	1/2"X20	1/2"X20	14	9.5	29	14	17
2J-05-08	1/2"X20	3/4"X16	14	11	30.5	19	24
2J-06	9/16"X18	9/16"X18	14.1	10.5	29	17	19
2J-06-08	9/16"X18	3/4"X16	14.1	11	31	19	24
2J-06-10	9/16"X18	7/8"X14	14.1	13	33.5	22	27
2J-08	3/4"X16	3/4"X16	16.7	11	36	22	24
2J-08-06	3/4"X16	9/16"X18	16.7	10.5	34	22	19
2J-08-10	3/4"X16	7/8"X14	16.7	13	36.5	22	27
2J-08-12	3/4"X16	1.1/16"X12	16.7	15	39.5	27	32
2J-10	7/8"X14	7/8"X14	19.3	13	39	24	27
2J-10-08	7/8"X14	3/4"X16	19.3	11	38	24	24
2J-10-12	7/8"X14	1.1/16"X12	19.3	15	42	27	32
2J-12	1.1/16"X12	1.1/16"X12	21.9	15	44.5	30	32
2J-12-10	1.1/16"X12	7/8"X14	21.9	13	43.5	30	27
2J-12-16	1.1/16"X12	1.5/16"X12	21.9	16	45.5	36	41
2J-16	1.5/16"X12	1.5/16"X12	23.1	16	46.5	36	41
2J-16-20	1.5/16"X12	1.5/8"X12	23.1	17	53	41	50
2J-20	1.5/8"X12	1.5/8"X12	24.3	17	54.5	46	50
2J-20-24	1.5/8"X12	1.7/8"X12	24.3	20	55.5	46	55
2J-24	1.7/8"X12	1.7/8"X12	27.5	20	61	50	55
2J-24-32	1.7/8"X12	2.1/2"X12	27.5	24.5	63	65	75
2J-32	2.1/2"X12	2.1/2"X12	33.9	24.5	69.5	65	75

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。
Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

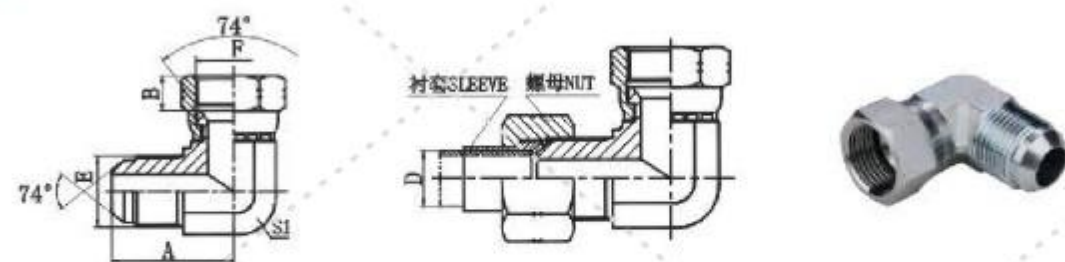


90° 弯美制JIC外螺纹74° 外锥/JIC内螺纹74° 内锥
90° ELBOW JIC MALE 74° CONE/ JIC FEMALE 74° SEAT

2J9

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
2J9-02	5/16"X24	5/16"X24	21	5.6	11	12
2J9-03	3/8"X24	3/8"X24	22	5	11	14
2J9-04	7/16"X20	7/16"X20	24.5	9	11	15
2J9-05	1/2"X20	1/2"X20	26.5	9.5	14	17
2J9-06	9/16"X18	9/16"X18	26.9	10.5	14	19
2J9-06-08	9/16"X18	3/4"X16	28.5	11	16	24
2J9-08-06	3/4"X16	9/16"X18	32	10.5	19	19
2J9-08	3/4"X16	3/4"X16	32	11	19	24
2J9-08-10	3/4"X16	7/8"X14	32	13	19	27
2J9-10	7/8"X14	7/8"X14	37.8	13	22	27
2J9-10-08	7/8"X14	3/4"X16	37.8	11	22	24
2J9-10-12	7/8"X14	1.1/16"X12	39.5	15	24	32
2J9-12	1.1/16"X12	1.1/16"X12	44.2	15	27	32
2J9-12-10	1.1/16"X12	7/8"X14	44.2	13	27	27
2J9-12-16	1.1/16"X12	1.5/16"X12	46	16	30	41
2J9-14	1.3/16"X12	1.3/16"X12	47.5	15	30	36
2J9-16	1.5/16"X12	1.5/16"X12	48.8	16	33	41
2J9-16-20	1.5/16"X12	1.5/8"X12	54	17	41	50
2J9-20-16	1.5/8"X12	1.5/16"X12	55.5	16	41	41
2J9-20	1.5/8"X12	1.5/8"X12	55.5	17	41	50
2J9-20-24	1.5/8"X12	1.7/8"X12	59.5	20	48	55
2J9-24-20	1.7/8"X12	1.5/8"X12	62.5	17	48	50
2J9-24	1.7/8"X12	1.7/8"X12	62.5	20	48	55
2J9-32	2.1/2"X12	2.1/2"X12	75.5	24.5	63	75

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

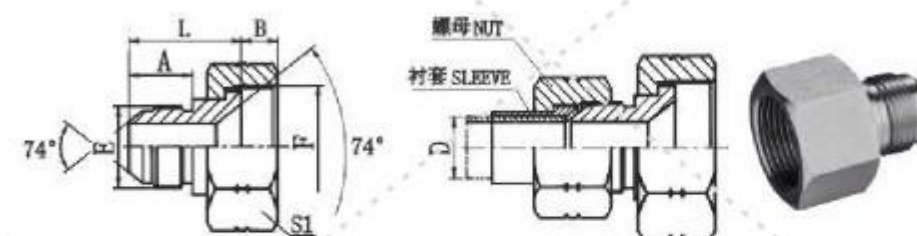

5J-S


美制JIC外螺纹/ 美制JIC内螺纹
JIC MALE / JIC FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
5J-04-06S	7/16"X20	9/16"X18	14	9.8	26.2	19
5J-04-08S	7/16"X20	3/4"X16	14	10.9	26.2	24
5J-04-10S	7/16"X20	7/8"X14	14	12.8	28	27
5J-04-12S	7/16"X20	1.1/16"X12	14	15	29.3	32
5J-04-14S	7/16"X20	1.3/16"X12	14	15.2	32.5	36
5J-05-08S	1/2"X20	3/4"X16	14	10.9	26.2	24
5J-05-10S	1/2"X20	7/8"X14	14	12.8	28	27
5J-05-12S	1/2"X20	1.1/16"X12	14	15	29.8	32
5J-06-08S	9/16"X18	3/4"X16	14.1	10.9	26.3	24
5J-06-10S	9/16"X18	7/8"X14	14.1	12.8	28.2	27
5J-06-12S	9/16"X18	1.1/16"X12	14.1	15	30.1	32
5J-06-14S	9/16"X18	1.3/16"X12	14.1	15.2	32.5	36
5J-06-16S	9/16"X18	1.5/16"X12	14.1	15.9	33	38
5J-08-12S	3/4"X16	1.1/16"X12	16.7	15	33.3	32
5J-08-14S	3/4"X16	1.3/16"X12	16.7	15.2	35	36
5J-08-16S	3/4"X16	1.5/16"X12	16.7	15.9	35.6	38
5J-08-20S	3/4"X16	1.5/8"X12	16.7	16.8	35.5	50
5J-10-16S	7/8"X14	1.5/16"X12	19.3	15.9	37.5	38
5J-10-20S	7/8"X14	1.5/8"X12	19.3	16.8	37.9	50
5J-10-24S	7/8"X14	1.7/8"X12	19.3	19.7	42	60
5J-12-16S	1.1/16"X12	1.5/16"X12	22	15.9	40.2	38
5J-12-20S	1.1/16"X12	1.5/3"X12	22	16.8	40.6	50
5J-12-24S	1.1/16"X12	1.7/8"X12	22	19.7	42	60
5J-16-20S	1.5/16"X12	1.5/8"X12	23	16.8	41.8	50
5J-16-24S	1.5/16"X12	1.7/8"X12	23	19.7	43.2	60
5J-16-32S	1.5/16"X12	2.1/2"X12	23	29.1	49	75
5J-20-24S	1.5/8"X12	1.7/8"X12	24.3	19.7	44.3	60
5J-20-32S	1.5/8"X12	2.1/2"X12	24.3	29.1	50	75

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

BJ

美制JIC外螺纹74° 外锥/ 美制
JIC内螺纹74° 内锥分支三通
JIC MALE 74° CONE / JIC FEMALE
BRANCH TEE

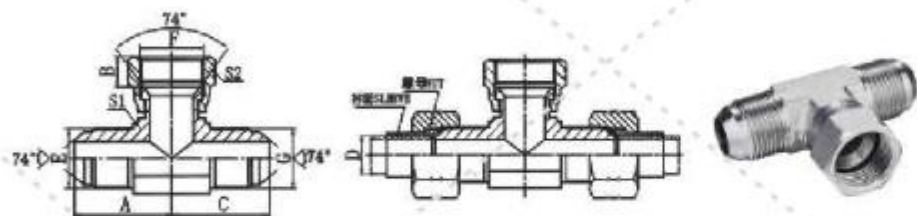


代号 PART NO.	螺 纹 THREAD			尺 寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
BJ-04	7/16"X20	7/16"X20	7/16"X20	24.5	9	24.5	11	15
BJ-05	1/2"X20	1/2"X20	1/2"X20	26.5	9.5	26.5	14	17
BJ-06	9/16"X18	9/16"X18	9/16"X18	26.9	10.5	26.9	14	19
BJ-08	3/4"X16	3/4"X16	3/4"X16	32	11	32	19	24
BJ-10	7/8"X14	7/8"X14	7/8"X14	37.8	14	37.8	22	27
BJ-12	1.1/16"X12	1.1/16"X12	1.1/16"X12	44.2	15	44.2	27	32
BJ-14	1.3/16"X12	1.3/16"X12	1.3/16"X12	47.5	15	47.5	30	36
BJ-16	1.5/16"X12	1.5/16"X12	1.5/16"X12	49	16	49	33	41
BJ-20	1.5/8"X12	1.5/8"X12	1.5/8"X12	56	17	56	41	50
BJ-24	1.7/8"X12	1.7/8"X12	1.7/8"X12	62.5	20	62.5	48	55
BJ-32	2.1/2"X12	2.1/2"X12	2.1/2"X12	78	24.5	78	63	75

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

CJ

美制JIC外螺纹74° 外锥/ 美制JIC内
螺纹74° 内锥主支三通
JIC MALE 74° CONE / JIC FEMALE 74°
SEAT RUN TEE

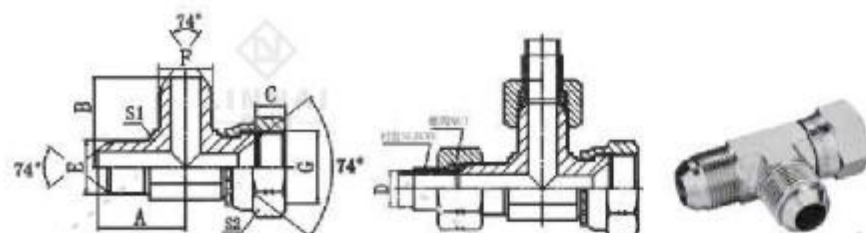


代号 PART NO.	螺 纹 THREAD			尺 寸 DIMENSIONS				
	E	F	G	A	B	C	S1	S2
CJ-04	7/16"X20	7/16"X20	7/16"X20	24.5	24.5	9	11	15
CJ-05	1/2"X20	1/2"X20	1/2"X20	26.5	26.5	9.5	14	17
CJ-06	9/16"X18	9/16"X18	9/16"X18	26.9	26.9	10.5	14	19
CJ-08	3/4"X16	3/4"X16	3/4"X16	32	32	9.5	19	24
CJ-10	7/8"X14	7/8"X14	7/8"X14	37.8	37.8	13	22	27
CJ-12	1.1/16"X12	1.1/16"X12	1.1/16"X12	44.2	44.2	15	27	32
CJ-14	1.3/16"X12	1.3/16"X12	1.3/16"X12	47.5	47.5	15	30	36
CJ-16	1.5/16"X12	1.5/16"X12	1.5/16"X12	49	49	16	33	41
CJ-20	1.5/8"X12	1.5/8"X12	1.5/8"X12	56	56	17	41	50
CJ-24	1.7/8"X12	1.7/8"X12	1.7/8"X12	62.5	62.5	20	48	55
CJ-32	2.1/2"X12	2.1/2"X12	2.1/2"X12	78	78	24.5	63	75


注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

DJ

美制JIC内螺纹74° 内锥三通
JIC FEMALE 74° SEAT TEE

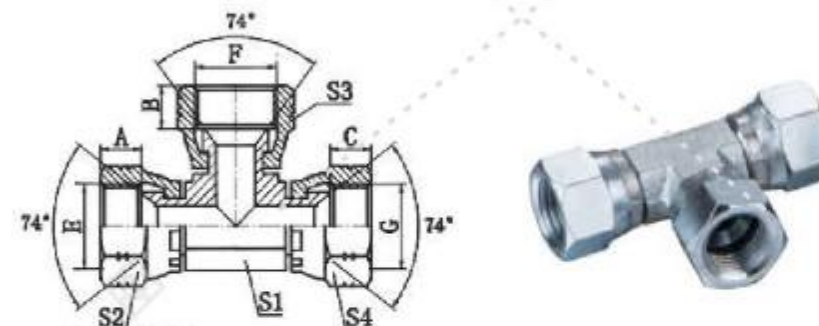


代号 PART NO.	螺 纹 THREAD			尺 寸 DIMENSIONS		
	E	F	G	A,B,C	S1	S2,S3,S4
DJ-04	7/16"X20	7/16"X20	7/16"X20	9	11	15
DJ-05	1/2"X20	1/2"X20	1/2"X20	9.5	11	17
DJ-06	9/16"X18	9/16"X18	9/16"X18	10.5	14	19
DJ-08	3/4"X16	3/4"X16	3/4"X16	11	16	24
DJ-10	7/8"X14	7/8"X14	7/8"X14	14	22	27
DJ-12	1.1/16"X12	1.1/16"X12	1.1/16"X12	15	24	32
DJ-16	1.5/16"X12	1.5/16"X12	1.5/16"X12	16	33	41

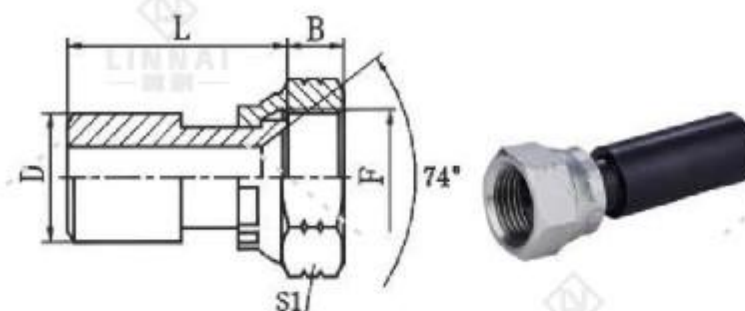

2WJ

焊接管/ 美制JIC内螺纹74° 内锥
BUTT-WELD TUBE / JIC FEMALE 74° SEAT



代号 PART NO.	螺 纹 THREAD F	管子直径 TUBE O.D.	尺 寸 DIMENSIONS			
			B	D	L	S1
2WJ-10-04	7/16"X20	10	9	10	25.5	15
2WJ-12-05	1/2"X20	12	9.5	12	27	17
2WJ-14-04	7/16"X20	14	9	14	27	15
2WJ-14-06	9/16"X18	14	10.5	14	55	19
2WJ-18-08	3/4"X16	18	11	18	60	24
2WJ-20-10	7/8"X14	20	13	20	33	27
2WJ-22-12	1.1/16"X12	22	15	22	68	32
2WJ-28-16	1.5/16"X12	28	16	28	68	41
2WJ-34-20	1.5/8"X12	34	17	34	75	50

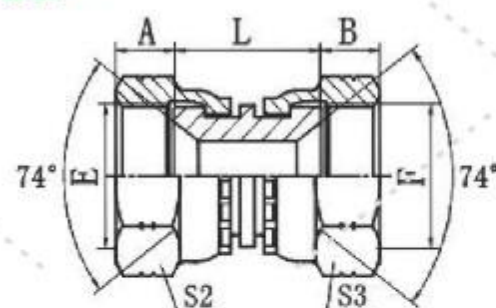

3J

美制JIC内螺纹74° 内锥
JIC FEMALE 74° SEAT

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S2	S3
3J-04	7/16"X20	7/16"X20	9	9	19	15	15
3J-05	1/2"X20	1/2"X20	9.5	9.5	21	17	17
3J-06	9/16"X18	9/16"X18	10.5	10.5	21	19	19
3J-06-08	9/16"X18	3/4"X16	10.5	11	23	19	24
3J-08	3/4"X16	3/4"X16	11	11	26	24	24
3J-10	7/8"X14	7/8"X14	13	13	27	27	27
3J-12	1.1/16"X12	1.1/16"X12	15	15	29	32	32
3J-16	1.5/16"X12	1.5/16"X12	16	16	29	41	41
3J-20	1.5/8"X12	1.5/8"X12	17	17	35	50	50
3J-24	1.7/8"X12	1.7/8"X12	20	20	37	55	55




4J

美制JIC外螺纹74° 外锥堵头
JIC MALE 74° CONE PLUG

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E		A	L	S1
4J-04	7/16"X20		14	20	12
4J-05	1/2"X20		14	20	14
4J-06	9/16"X18		14.1	20	17
4J-08	3/4"X16		16.7	25	22
4J-10	7/8"X14		19.3	27.5	24
4J-12	1.1/16"X12		21.9	32	30
4J-14	1.3/16"X12		22.6	33.5	32
4J-16	1.5/16"X12		23.1	34	36
4J-20	1.5/8"X12		24.3	38	46
4J-24	1.7/8"X12		27.5	44.5	50
4J-32	2.1/2"X12		33.9	51	65


注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.



9J

美制JIC内螺纹74° 内锥堵头
JIC FEMALE 74° SEAT PLUG


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E		A	L	S2
9J-04	7/16"X20		9	10.5	15
9J-05	1/2"X20		9.5	11	17
9J-06	9/16"X18		10.5	11	19
9J-08	3/4"X16		11	13	24
9J-10	7/8"X14		13	13.5	27
9J-12	1.1/16"X12		15	15	32
9J-14	1.3/16"X12		15	15	36
9J-16	1.5/16"X12		16	15.5	41
9J-20	1.5/8"X12		17	18.5	50
9J-24	1.7/8"X12		20	19	55
9J-32	2.1/2"X12		23.5	20.5	75

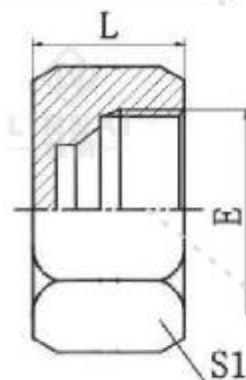

9J-CAP

JIC 74° 内螺纹堵头
JIC 74° FEMALE PLUG

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS	
	E		L	S1
9J-04CAP	7/16"X20		15.1	15
9J-05CAP	1/2"X20		15.5	17
9J-06CAP	9/16"X18		15.9	19
9J-08CAP	3/4"X16		19	24
9J-10CAP	7/8"X14		21.4	27
9J-12CAP	1.1/16"X12		23	32
9J-16CAP	1.5/16"X12		25.8	41
9J-20CAP	1.5/8"X12		27	50
9J-24CAP	1.7/8"X12		30.2	60
9J-32CAP	2.1/2"X12		36.5	75

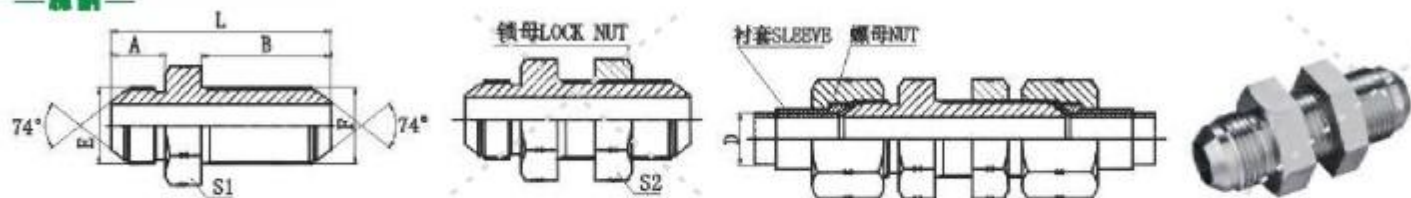


6J

6J-LN

美制JIC外螺纹74° 外锥过板接头
JIC MALE 74° CONE BULKHEAD

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
6J-04	7/16"X20	7/16"X20	14	32.5	52.5	17	17
6J-05	1/2"X20	1/2"X20	14	32.5	52.5	19	19
6J-06	9/16"X18	9/16"X18	14.1	32.5	54.5	22	22
6J-08	3/4"X16	3/4"X16	16.7	36.5	61.5	24	24
6J-10	7/8"X14	7/8"X14	19.3	40	69.5	30	30
6J-12	1.1/16"X12	1.1/16"X12	21.9	44.5	78.5	36	36
6J-14	1.3/16"X12	1.3/16"X12	22.6	44.5	79.2	38	38
6J-16	1.5/16"X12	1.5/16"X12	23.1	44.5	79.8	41	41
6J-20	1.5/8"X12	1.5/8"X12	24.3	45.7	84	50	50
6J-24	1.7/8"X12	1.7/8"X12	27.5	46	89.5	55	55
6J-32	2.1/2"X12	2.1/2"X12	33.9	53.1	106.5	70	70

注：如需带美制JIC锁母8J-X订货，则在代号后加“LN”，如6J-12N。螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。

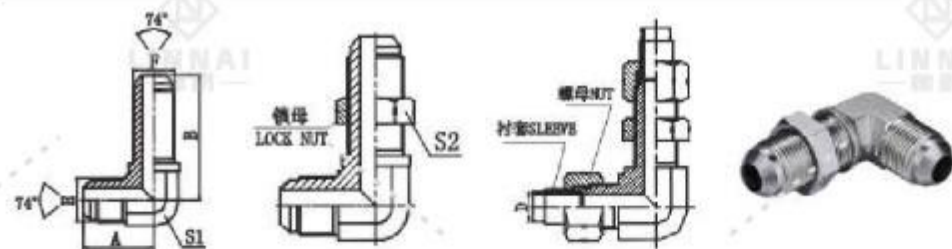

6J9 6J9-LN

90° 弯美制JIC外螺纹
74° 外锥过板接头
90° ELBOW JIC MALE
74° CONE BULKHEAD

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
6J9-04	7/16"X20	7/16"X20	24.5	40.4	11	17
6J9-05	1/2"X20	1/2"X20	26.6	43.7	14	19
6J9-06	9/16"X18	9/16"X18	27.7	46	14	22
6J9-08	3/4"X16	3/4"X16	34.5	53.5	19	24
6J9-10	7/8"X14	7/8"X14	39.6	60.7	22	30
6J9-12	1.1/16"X12	1.1/16"X12	45.2	67.8	27	36
6J9-14	1.3/16"X12	1.3/16"X12	48.2	69.5	30	38
6J9-16	1.5/16"X12	1.5/16"X12	50	71	33	41
6J9-20	1.5/8"X12	1.5/8"X12	57.5	79.2	41	50

注：如需带美制JIC锁母8J-X订货，则在代号后加“LN”，如6J-12N。螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。




1JN

JIC外螺纹74° 外锥/ 布锥管外螺纹
JIC MALE 74° CONE / NPT MALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1JN-02	5/16"X24	Z1/8"X27	11.4	10.5	28	12
1JN-04-02	7/16"X20	Z1/8"X27	14	10.5	30.5	12
1JN-04	7/16"X20	Z1/4"X18	14	15	35	17
1JN-04-06	7/16"X20	Z3/8"X18	14	16	36	19
1JN-04-08	7/16"X20	Z1/2"X14	14	19.5	41.5	24
1JN-05-04	1/2"X20	Z1/4"X18	14	15	35	17
1JN-05-06	1/2"X20	Z3/8"X18	14	16	36	19
1JN-05-08	1/2"X20	Z1/2"X14	14	19.5	41.5	24
1JN-06-04	9/16"X18	Z1/4"X18	14.1	15	34.5	17
1JN-06	9/16"X18	Z3/8"X18	14.1	16	36	19
1JN-06-08	9/16"X18	Z1/2"X14	14.1	19.5	41.5	24
1JN-08-04	3/4"X16	Z1/4"X18	16.7	15	39	22
1JN-08-06	3/4"X16	Z3/8"X18	16.7	16	40	22
1JN-08	3/4"X16	Z1/2"X14	16.7	19.5	44	24
1JN-08-12	3/4"X16	Z3/4"X14	16.7	19.5	46.5	30
1JN-10-06	7/8"X14	Z3/8"X18	19.3	16	43.5	24
1JN-10-08	7/8"X14	Z1/2"X14	19.3	19.5	47	24
1JN-10-12	7/8"X14	Z3/4"X14	19.3	19.5	49	30
1JN-12-08	1.1/16"X12	Z1/2"X14	21.9	19.5	51	30
1JN-12	1.1/16"X12	Z3/4"X14	21.9	19.5	51.5	30
1JN-12-16	1.1/16"X12	Z1"X11.5	21.9	25.5	58.5	36
1JN-12-20	1.1/16"X12	Z1.1/4"X11.5	21.9	26.5	61.5	46
1JN-14-12	1.3/16"X12	Z3/4"X14	22.6	19.5	53	32
1JN-16-12	1.5/16"X12	Z3/4"X14	23.1	19.5	53.5	36
1JN-16	1.5/16"X12	Z1"X11.5	23.1	25.5	58.5	36
1JN-16-20	1.5/16"X12	Z1.1/4"X11.5	23.1	26.5	62.5	46
1JN-16-24	1.5/16"X12	Z1.1/2"X11.5	23.1	27.5	65.5	50
1JN-20-16	1.5/8"X12	Z1"X11.5	24.3	25.5	63	46
1JN-20	1.5/8"X12	Z1.1/4"X11.5	24.3	26.5	63.5	46
1JN-20-24	1.5/8"X12	Z1.1/2"X11.5	24.3	27.5	67	50
1JN-24-20	1.7/8"X12	Z1.1/4"X11.5	27.5	26.5	69	50
1JN-24	1.7/8"X12	Z1.1/2"X11.5	27.5	27.5	70	50
1JN-24-32	1.7/8"X12	Z2"X11.5	27.5	27.5	72	65
1JN-32	2.1/2"X12	Z2"X11.5	33.9	27.5	78.5	65
1JN-32-20	2.1/2"X12	Z1.1/4"X11.5	33.9	26.5	77	65
1JN-32-24	2.1/2"X12	Z1.1/2"X11.5	33.9	27.5	78.5	65

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

1JN9

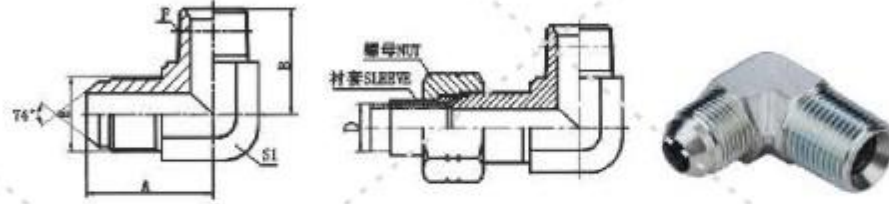


90° 弯JIC外螺纹74° 外锥/
布锥管外螺纹
90° ELBOW JIC MALE 74°
CONE / NPT MALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
1JN9-02	5/16"X24	Z1/8"X27	21	21	11	
1JN9-03-02	3/8"X24	Z1/8"X27	22	21	11	
1JN9-04	7/16"X20	Z1/4"X18	26.6	25.5	14	
1JN9-04-02	7/16"X20	Z1/8"X27	24.5	21	11	
1JN9-04-06	7/16"X20	Z3/8"X18	29.5	31	19	
1JN9-05-02	1/2"X20	Z1/8"X27	26.6	23.5	14	
1JN9-05-04	1/2"X20	Z1/4"X18	26.6	25.5	14	
1JN9-05-06	1/2"X20	Z3/8"X18	29.5	31	19	
1JN9-06	9/16"X18	Z3/8"X18	30	31	19	
1JN9-06-04	9/16"X18	Z1/4"X18	26.9	25.5	14	
1JN9-06-08	9/16"X18	Z1/2"X14	32	36.7	22	
1JN9-08	3/4"X16	Z1/2"X14	34.8	37.3	22	
1JN9-08-04	3/4"X16	Z1/4"X18	32	28.5	19	
1JN9-08-06	3/4"X16	Z3/8"X18	32	31	19	
1JN9-08-12	3/4"X16	Z3/4"X14	37.9	44	27	
1JN9-10-06	7/8"X14	Z3/8"X18	37.8	32.5	22	
1JN9-10-08	7/8"X14	Z1/2"X14	37.8	37.3	22	
1JN9-10-12	7/8"X14	Z3/4"X14	41	44	27	
1JN9-10-16	7/8"X14	Z1"X11.5	44.5	50	33	
1JN9-12	1.1/16"X12	Z3/4"X14	44.2	44	27	
1JN9-12-08	1.1/16"X12	Z1/2"X14	44.2	40	27	
1JN9-12-16	1.1/16"X12	Z1"X11.5	49	50	33	
1JN9-12-20	1.1/16"X12	Z1.1/4"X11.5	52.5	54.5	41	
1JN9-14-12	1.3/16"X12	Z3/4"X14	47.5	45	30	
1JN9-14-16	1.3/16"X12	Z1"X11.5	48.7	50	33	
1JN9-16	1.5/16"X12	Z1"X11.5	49	50	33	
1JN9-16-12	1.5/16"X12	Z3/4"X14	49	45.2	33	
1JN9-16-20	1.5/16"X12	Z1.1/4"X11.5	54	60.5	41	
1JN9-16-24	1.5/16"X12	Z1.1/2"X11.5	59.4	59.5	48	
1JN9-20	1.5/8"X12	Z1.1/4"X11.5	55.5	54.5	41	
1JN9-20-16	1.5/8"X12	Z1"X11.5	55.5	54.5	41	
1JN9-20-24	1.5/8"X12	Z1.1/2"X11.5	59.4	63	48	
1JN9-24	1.7/8"X12	Z1.1/2"X11.5	62.5	63	48	
1JN9-24-20	1.7/8"X12	Z1.1/4"X11.5	62.5	63	48	
1JN9-32-24	2.1/2"X12	Z1.1/2"X11.5	75.4	70	63	
1JN9-32	2.1/2"X12	Z2"X11.5	75.4	67.5	63	

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.


AJJN

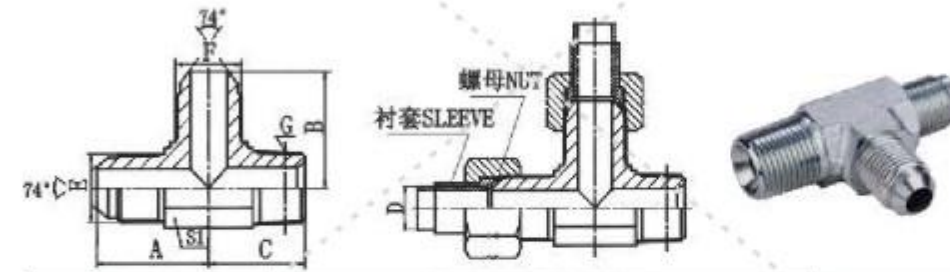

美制JIC外螺纹74° 外锥/
布锥管外螺纹主支三通
JIC MALE 74° CONE /
NPT MALE RUN TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
AJJN-04	7/16"X20	7/16"X20	Z1/4"X18	26.6	26.6	25.5	14
AJJN-04-04-02	7/16"X20	7/16"X20	Z1/8"X27	24.5	24.5	21	11
AJJN-05-05-02	1/2"X20	1/2"X20	Z1/8"X27	26.5	26.5	23.5	14
AJJN-05-05-04	1/2"X20	1/2"X20	Z1/4"X18	26.5	26.5	25.5	14
AJJN-06	9/16"X18	9/16"X18	Z3/8"X18	30	30	31	19
AJJN-06-06-04	9/16"X18	9/16"X18	Z1/4"X18	26.9	26.9	25.5	14
AJJN-08	3/4"X16	3/4"X16	Z1/2"X14	34.8	34.8	36.7	22
AJJN-08-08-06	3/4"X16	3/4"X16	Z3/8"X18	32	32	31	19
AJJN-10-10-08	7/8"X14	7/8"X14	Z1/2"X14	37.8	37.8	36.7	22
AJJN-10-10-12	7/8"X14	7/8"X14	Z3/4"X14	41	41	44	27
AJJN-12	1.1/16"X12	1.1/16"X12	Z3/4"X14	44.2	44.2	44	27
AJJN-16	1.5/16"X12	1.5/16"X12	Z1"X11.5	49	49	50	33
AJJN-20	1.5/8"X12	1.5/8"X12	Z1.1/4"X11.5	55.5	55.5	54.5	41
AJJN-24	1.7/8"X12	1.7/8"X12	Z1.1/2"X11.5	62.5	62.5	60	48

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

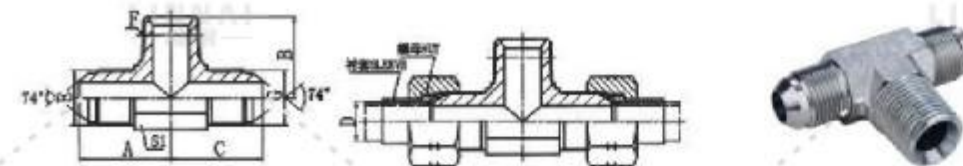


AJNJ

美制JIC外螺纹74° 外锥/
布锥管外螺纹分支三通
JIC MALE 74° CONE /
NPT MALE BRANCH TEE

代号 PART NO.	螺纹 THREAD			尺寸 DIMENSIONS			
	E	F	G	A	B	C	S1
AJNJ-04	7/16"X20	Z1/4"X18	7/16"X20	26.6	25.5	26.6	14
AJNJ-04-02-04	7/16"X20	Z1/8"X27	7/16"X20	24.5	21	24.5	11
AJNJ-05-02-05	1/2"X20	Z1/8"X27	1/2"X20	26.6	23.5	26.6	14
AJNJ-05-04-05	1/2"X20	Z1/4"X18	1/2"X20	26.6	25.5	26.6	14
AJNJ-06	9/16"X18	Z3/8"X18	9/16"X18	30	31	30	19
AJNJ-06-04-06	9/16"X18	Z1/4"X18	9/16"X18	26.9	25.5	26.9	14
AJNJ-06-08-06	9/16"X18	Z1/2"X14	9/16"X18	32	36.7	32	22
AJNJ-08	3/4"X16	Z1/2"X14	3/4"X16	34.8	37.3	34.8	22
AJNJ-08-06-08	3/4"X16	Z3/8"X18	3/4"X16	32	31	32	19
AJNJ-10-08-10	7/8"X14	Z1/2"X14	7/8"X14	37.8	36.7	37.8	22
AJNJ-12	1.1/16"X12	Z3/4"X14	1.1/16"X12	44.2	44	44.2	27
AJNJ-16	1.5/16"X12	Z1"X11.5	1.5/16"X12	49	50	49	33
AJNJ-20	1.5/8"X12	Z1.1/4"X11.5	1.5/8"X12	55.5	54.5	55.5	41
AJNJ-24	1.7/8"X12	Z1.1/2"X11.5	1.7/8"X12	62.5	63	62.5	48

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

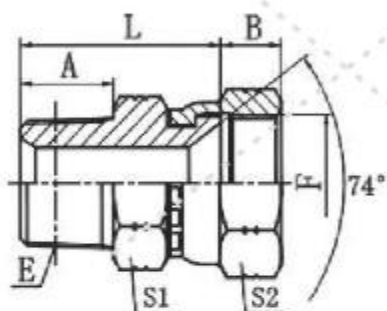


2NJ

布锥管外螺纹/JIC内螺纹74° 内锥
NPT MALE/JIC FEMALE 74° SEAT



代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2NJ-02-04	Z1/8"X27	7/16"X20	10.5	9	24.5	12	17
2NJ-02-05	Z1/8"X27	1/2"X20	10.5	9	25	12	17
2NJ-04	Z1/4"X18	7/16"X20	15	9	29	17	17
2NJ-04-05	Z1/4"X18	1/2"X20	15	9	29.5	17	17
2NJ-04-06	Z1/4"X18	9/16"X18	15	10.5	29.5	17	19
2NJ-04-08	Z1/4"X18	3/4"X16	15	10.5	31.5	19	24
2NJ-06	Z3/8"X18	9/16"X18	16	10.5	30.5	19	19
2NJ-06-08	Z3/8"X18	3/4"X16	16	10.5	32.5	19	24
2NJ-06-10	Z3/8"X18	7/8"X14	16	12	35	22	27
2NJ-08	Z1/2"X14	3/4"X16	19.5	10.5	37.5	22	24
2NJ-08-06	Z1/2"X14	9/16"X18	19.5	10.5	36	22	19
2NJ-08-10	Z1/2"X14	7/8"X14	19.5	12	38	22	27
2NJ-08-12	Z1/2"X14	1.1/16"X12	19.5	15	42	27	32
2NJ-12	Z3/4"X14	1.1/16"X12	19.5	15	42	30	32
2NJ-12-08	Z3/4"X14	3/4"X16	19.5	10.5	40	30	24
2NJ-12-10	Z3/4"X14	7/8"X14	19.5	12	40.5	30	27
2NJ-12-16	Z3/4"X14	1.5/16"X12	19.5	16	42.5	32	41
2NJ-16	Z1"X11.5	1.5/16"X12	25.5	16	48	36	41
2NJ-16-12	Z1"X11.5	1.1/16"X12	25.5	15	49	36	32
2NJ-16-20	Z1"X11.5	1.5/8"X12	25.5	17	55	41	50
2NJ-20	Z1.1/4"X11.5	1.5/8"X12	26.5	17	56	46	50
2NJ-20-24	Z1.1/4"X11.5	1.7/8"X12	26.5	20	57.5	46	60
2NJ-24-20	Z1.1/2"X11.5	1.5/8"X12	27.5	17	58.5	50	50
2NJ-24	Z1.1/2"X11.5	1.7/8"X12	27.5	23.5	60.5	50	60

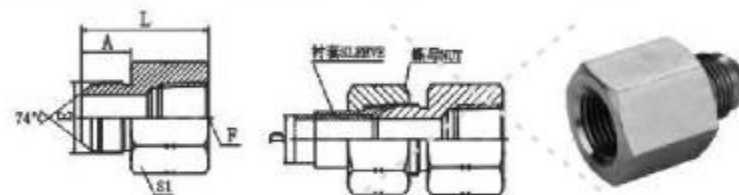

5JN

美制JIC外螺纹74° 外锥/
布锥管内螺纹

JIC MALE 74° CONE / NPT FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	L	S1
5JN-04-02	7/16"X20	Z1/8"X27	14	30	17
5JN-04	7/16"X20	Z1/4"X18	14	35.5	19
5JN-05-04	1/2"X20	Z1/4"X18	14	35.3	19
5JN-06-04	9/16"X18	Z1/4"X18	14.1	35.6	19
5JN-06	9/16"X18	Z3/8"X18	14.1	37.1	22
5JN-06-08	9/16"X18	Z1/2"X14	14.1	42.5	30
5JN-08-06	3/4"X16	Z3/8"X18	16.7	39.6	22
5JN-08	3/4"X16	Z1/2"X14	16.7	45.6	30
5JN-08-12	3/4"X16	Z3/4"X14	16.7	45	36
5JN-10-08	7/8"X14	Z1/2"X14	19.3	48	30
5JN-10-12	7/8"X14	Z3/4"X14	19.3	49.7	36
5JN-12-08	1.1/16"X12	Z1/2"X14	21.9	52.1	30
5JN-12	1.1/16"X12	Z3/4"X14	21.9	52.3	36
5JN-16-12	1.5/16"X12	Z3/4"X14	23.1	50	36
5JN-16	1.5/16"X12	Z1"X11.5	23.1	59.7	41
5JN-20	1.5/8"X12	Z1.1/4"X11.5	24.3	61.5	50
5JN-24	1.7/8"X12	Z1.1/2"X11.5	27.5	62.5	60
5JN-32	2.1/2"X12	Z2"X11.5	33.9	70	70

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。




5JN9

90° 弯JIC外螺纹74° 外锥/布锥管内螺纹

90° ELBOW JIC MALE 74° CONE /
NPT FEMALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS		
	E	F	A	B	S1
5JN9-04-02	7/16"X20	Z1/8"X27	27.5	16.8	16
5JN9-04	7/16"X20	Z1/4"X18	30.9	22.4	19
5JN9-06-04	9/16"X18	Z1/4"X18	31.2	22.4	19
5JN9-06	9/16"X18	Z3/8"X18	33.5	25.9	24
5JN9-08-04	3/4"X16	Z1/4"X18	31.6	22.4	19
5JN9-08	3/4"X16	Z1/2"X14	39.5	31.2	30
5JN9-12-08	1.1/16"X12	Z1/2"X14	46	31.2	30
5JN9-12	1.1/16"X12	Z3/4"X14	48	34.5	33
5JN9-12-16	1.1/16"X12	Z1"X11.5	52.5	41.1	41
5JN9-16-12	1.5/16"X12	Z3/4"X14	49	34.5	33
5JN9-16	1.5/16"X12	Z1"X11.5	55.1	41.1	41
5JN9-20	1.5/8"X12	Z1.1/4"X11.5	59.2	43.2	48
5JN9-24	1.7/8"X12	Z1.1/2"X11.5	73.4	52.8	63

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。

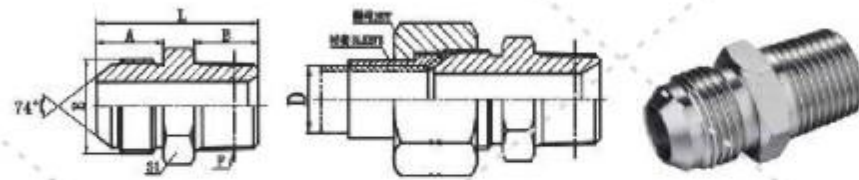


1JT-SP

美制JIC外螺纹74° 外锥/
英锥管外螺纹
JIC MALE 74° CONE / BSPT MALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	L	S1
1JT-04-02SP	7/16"X20	R1/8"X28	14	10	30	12
1JT-04-04SP	7/16"X20	R1/4"X19	14	14.5	34.5	14
1JT-04-06SP	7/16"X20	R3/8"X19	14	15	35	17
1JT-05-02SP	1/2"X20	R1/8"X28	14	10.5	30.5	14
1JT-05-04SP	1/2"X20	R1/4"X19	14	14.5	34	14
1JT-06-02SP	9/16"X18	R1/8"X28	14.1	10.5	30.5	17
1JT-06-04SP	9/16"X18	R1/4"X19	14.1	14.5	34	17
1JT-06-06SP	9/16"X18	R3/8"X19	14.1	15	34	17
1JT-06-08SP	9/16"X18	R1/2"X14	14.1	20	41	22
1JT-08-06SP	3/4"X16	R3/8"X19	16.7	15	39	22
1JT-08-08SP	3/4"X16	R1/2"X14	16.7	20	44.5	22
1JT-08-12SP	3/4"X16	R3/4"X14	16.7	20	46	30
1JT-10-06SP	7/8"X14	R3/8"X19	19.3	15	42.5	24
1JT-10-08SP	7/8"X14	R1/2"X14	19.3	20	46.5	24
1JT-10-12SP	7/8"X14	R3/4"X14	19.3	20	48.5	30
1JT-12-08SP	1.1/16"X12	R1/2"X14	21.9	20	51	30
1JT-12-12SP	1.1/16"X12	R3/4"X14	21.9	20	51	30
1JT-12-16SP	1.1/16"X12	R1"X11	21.9	25.5	57.5	36
1JT-14-12SP	1.3/16"X12	R3/4"X14	22.6	20	52.5	32
1JT-14-16SP	1.3/16"X12	R1"X11	22.6	25.5	57.5	36
1JT-16-12SP	1.5/16"X12	R3/4"X14	23.1	20	53	36
1JT-16-16SP	1.5/16"X12	R1"X11	23.1	25.5	59	36
1JT-16-20SP	1.5/16"X12	R1.1/4"X11	23.1	26.5	61.5	46
1JT-20-16SP	1.5/8"X12	R1"X11	24.3	25.5	62.5	46
1JT-20-20SP	1.5/8"X12	R1.1/4"X11	24.3	26.5	63	46
1JT-20-24SP	1.5/8"X12	R1.1/2"X11	24.3	26.5	66.5	50
1JT-24-20SP	1.7/8"X12	R1.1/4"X11	27.5	26.5	67.5	50
1JT-24-24SP	1.7/8"X12	R1.1/2"X11	27.5	26.5	69.5	50
1JT-24-32SP	1.7/8"X12	R2"X11	27.5	30	74.5	65
1JT-32-24SP	2.1/2"X12	R1.1/2"X11	33.9	26.5	77.5	65
1JT-32-32SP	2.1/2"X12	R2"X11	33.9	30	80	65

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

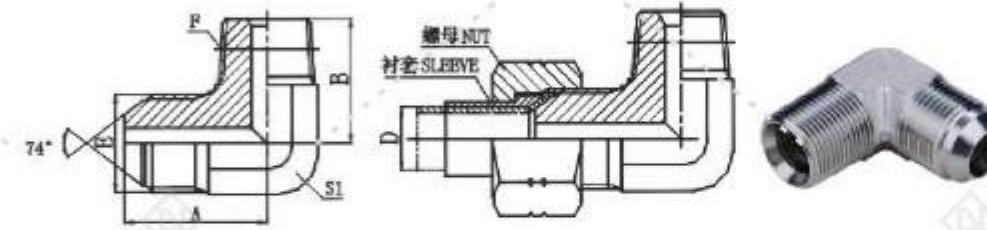


1JT9-SP

90° 弯美制JIC外螺纹74°
外锥/ 英锥管外螺纹
90° ELBOW JIC MALE 74°
CONE / BSPT MALE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	
1JT9-02SP	5/16"X24	R1/8"X28	20.5	21	11	
1JT9-04-02SP	7/16"X20	R1/8"X28	24.5	21	11	
1JT9-04-04SP	7/16"X20	R1/4"X19	26.6	25.5	14	
1JT9-04-06SP	7/16"X20	R3/8"X19	27.5	28	16	
1JT9-05-02SP	1/2"X20	R1/8"X28	26.6	23.5	14	
1JT9-05-04SP	1/2"X20	R1/4"X19	26.6	25.5	14	
1JT9-06-02SP	9/16"X18	R1/8"X28	26.9	23.5	14	
1JT9-06-04SP	9/16"X18	R1/4"X19	26.9	25.5	14	
1JT9-06-06SP	9/16"X18	R3/8"X19	28.5	28.5	16	
1JT9-06-08SP	9/16"X18	R1/2"X14	32	36	22	
1JT9-08-04SP	3/4"X16	R1/4"X19	32	28	19	
1JT9-08-06SP	3/4"X16	R3/8"X19	32	30.5	19	
1JT9-08-08SP	3/4"X16	R1/2"X14	34.8	36	22	
1JT9-08-12SP	3/4"X16	R3/4"X14	37.9	43.5	27	
1JT9-10-06SP	7/8"X14	R3/8"X19	38	32	22	
1JT9-10-08SP	7/8"X14	R1/2"X14	37.8	36	22	
1JT9-10-12SP	7/8"X14	R3/4"X14	41	43.5	27	
1JT9-12-08SP	1.1/16"X12	R1/2"X14	44.2	40	27	
1JT9-12-12SP	1.1/16"X12	R3/4"X14	44.2	43.5	27	
1JT9-12-16SP	1.1/16"X12	R1"X11	47.8	50	33	
1JT9-16-12SP	1.5/16"X12	R3/4"X14	49	47.5	33	
1JT9-16-16SP	1.5/16"X12	R1"X11	49	50	33	
1JT9-16-20SP	1.5/16"X12	R1.1/4"X11	54	56.5	41	
1JT9-20-16SP	1.5/8"X12	R1"X11	55.5	56.5	41	
1JT9-20-20SP	1.5/8"X12	R1.1/4"X11	55.5	56.5	41	
1JT9-24-20SP	1.7/8"X12	R1.1/4"X11	62.5	61	48	
1JT9-24-24SP	1.7/8"X12	R1.1/2"X11	62.5	62.5	48	
1JT9-24-32SP	1.7/8"X12	R2"X11	74.5	67	63	
1JT9-32-32SP	2.1/2"X12	R2"X11	75.4	67	63	


注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

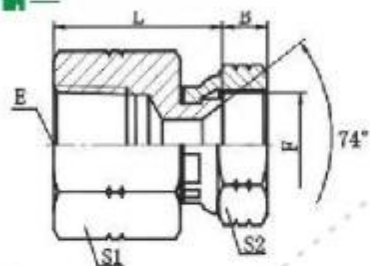

7NJ-S

布锥管内螺纹/ JIC内螺纹74° 内锥
NPT FEMALE / JIC FEMALE 74° SEAT

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	B	L	S1	S2
7NJ-04S	Z1/4"X18	7/16"X20	9	29	19	15
7NJ-04-06S	Z1/4"X18	9/16"X18	10.5	28	19	19
7NJ-06S	Z3/8"X18	9/16"X18	10.5	30	24	19
7NJ-06-08S	Z3/8"X18	3/4"X16	11	32	24	24
7NJ-08S	Z1/2"X14	3/4"X16	11	37.5	30	24
7NJ-08-10S	Z1/2"X14	7/8"X14	14	38	30	27
7NJ-08-12S	Z1/2"X14	1.1/16"X12	15	37.5	30	32
7NJ-12S	Z3/4"X14	1.1/16"X12	15	40.5	36	32
7NJ-16S	Z1"X11.5	1.5/16"X12	16	47.5	41	41
7NJ-20S	Z1.1/4"X11.5	1.5/8"X12	16.1	52	50	50
7NJ-24S	Z1.1/2"X11.5	1.7/8"X12	20	53.5	60	55

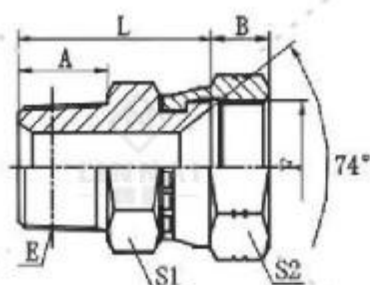

2TJ-SP

英锥管外螺纹/ 美制JIC内螺纹74° 内锥
BSPT MALE / JIC FEMALE 74° SEAT

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2TJ-02-04SP	R1/8"X28	7/16"X20	10	9	24	12	17
2TJ-04SP	R1/4"X19	7/16"X20	14	9	28	14	17
2TJ-04-05SP	R1/4"X19	1/2"X20	14	9	28.5	14	17
2TJ-04-06SP	R1/4"X19	9/16"X18	14	10.5	28.5	14	19
2TJ-06-05SP	R3/8"X19	1/2"X20	15	9	29.5	17	17
2TJ-06SP	R3/8"X19	9/16"X18	15	10.5	29.5	17	19
2TJ-08SP	R1/2"X14	3/4"X16	19	10.5	37.5	24	24
2TJ-08-10SP	R1/2"X14	7/8"X14	19	12	38	24	27
2TJ-08-12SP	R1/2"X14	1.1/16"X12	20	15	41.5	27	32
2TJ-12SP	R3/4"X14	1.1/16"X12	19	15	41.5	30	32
2TJ-12-16SP	R3/4"X14	1.5/16"X12	20	16	43.5	32	41
2TJ-16SP	R1"X11	1.5/16"X12	24	16	47.5	36	41
2TJ-20SP	R1.1/4"X11	1.5/8"X12	25	17	55	46	50
2TJ-24SP	R1.1/2"X11	1.7/8"X12	26.5	20	59.5	50	55




美制JIC外螺纹74° 外锥/ SAE外螺纹
带O形圈轻系列ISO 11926-3
JIC MALE 74° CONE / SAE O-RING
BOSS L-SERIES ISO 11926-3

1JO

代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
	E	F	F端	A	B	L	S1
1JO-04-02	7/16"X20	5/16"X24	O902	14	7.54	27.5	14
1JO-04-03	7/16"X20	3/8"X24	O903	14	7.54	27.5	14
1JO-04	7/16"X20	7/16"X20	O904	14	9.14	29	14
1JO-04-05	7/16"X20	1/2"X20	O905	14	9.14	29	17
1JO-04-06	7/16"X20	9/16"X18	O906	14	9.93	30	17
1JO-05-04	1/2"X20	7/16"X20	O904	14	9.14	29	14
1JO-05-06	1/2"X20	9/16"X18	O906	14	9.93	30	17
1JO-06	9/16"X18	9/16"X18	O906	14.1	9.93	30	17
1JO-06-04	9/16"X18	7/16"X20	O904	14.1	9.14	29	17
1JO-06-05	9/16"X18	1/2"X20	O905	14.1	9.14	29.5	17
1JO-06-08	9/16"X18	3/4"X16	O908	14.1	11.13	33	22
1JO-08	3/4"X13	3/4"X16	O908	16.7	11.13	36	22
1JO-08-06	3/4"X16	9/16"X18	O906	16.7	9.93	35	22
1JO-08-10	3/4"X16	7/8"X14	O910	16.7	12.7	40	27
1JO-08-12	3/4"X16	1.1/16"X12	O912	16.7	15.09	43	32
1JO-10	7/8"X14	7/8"X14	O910	19.3	12.7	42.5	27
1JO-10-08	7/8"X14	3/4"X16	O908	19.3	11.13	39	24
1JO-10-12	7/8"X14	1.1/16"X12	O912	19.3	15.09	45.5	32
1JO-12	1.1/16"X12	1.1/16"X12	O912	21.9	15.09	48	32
1JO-12-08	1.1/16"X12	3/4"X16	O908	21.9	11.13	43	30
1JO-12-10	1.1/16"X12	7/8"X14	O910	21.9	12.7	45	30
1JO-12-16	1.1/16"X12	1.5/16"X12	O916	21.9	15.09	48	38
1JO-14	1.3/16"X12	1.3/16"X12	O914	22.6	15.09	48.5	36
1JO-14-12	1.3/16"X12	1.1/16"X12	O912	22.6	15.09	48.5	32
1JO-16	1.5/16"X12	1.5/16"X12	O916	23.1	15.09	49	38
1JO-16-12	1.5/16"X12	1.1/16"X12	O912	23.1	15.09	49	36
1JO-16-14	1.5/16"X12	1.3/16"X12	O914	23.1	15.09	49	36
1JO-16-20	1.5/16"X12	1.5/8"X12	O920	23.1	15.09	53	50
1JO-20	1.5/8"X12	1.5/8"X12	O920	24.3	15.09	54.5	50
1JO-20-16	1.5/8"X12	1.5/16"X12	O916	24.3	15.09	52.5	46
1JO-20-24	1.5/8"X12	1.7/8"X12	O924	24.3	15.09	54.5	55
1JO-24	1.7/8"X12	1.7/8"X12	O924	27.5	15.09	57.5	55
1JO-24-20	1.7/8"X12	1.5/8"X12	O920	27.5	15.09	57.5	50
1JO-32	2.1/2"X12	2.1/2"X12	O932	33.9	15.09	66	70

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。

Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

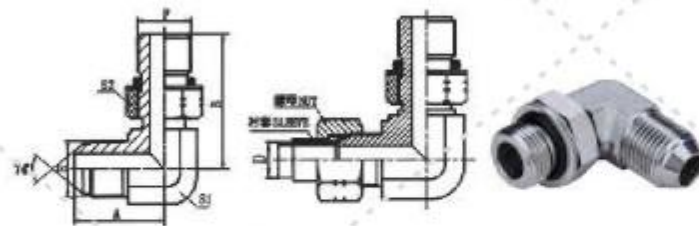


90° 弯美制JIC外螺纹74° 外锥/
SAE外螺纹带O形圈轻系列ISO 11926-3
90° ELBOW JIC MALE 74° CONE / SAE
O-RING BOSS L-SERIES ISO 11926-3

1J09-OG

代号 PART NO.	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
	E	F		A	B	S1	S2
1J09-04-03OG	7/16"X20	3/8"X24	O903	24.5	28	11	14
1J09-04OG	7/16"X20	7/16"X20	O904	24.5	27.2	11	17
1J09-04-05OG	7/16"X20	1/2"X20	O905	26.6	29.9	14	17
1J09-04-06OG	7/16"X20	9/16"X18	O906	26.6	31.8	14	19
1J09-05OG	1/2"X20	1/2"X20	O905	26.6	29	14	17
1J09-05-06OG	1/2"X20	9/16"X18	O906	26.6	31.8	14	19
1J09-06-04OG	9/16"X18	7/16"X20	O904	26.9	30	14	17
1J09-06-05OG	9/16"X18	1/2"X20	O905	26.9	29.9	14	17
1J09-06OG	9/16"X18	9/16"X18	O906	26.9	31.8	14	19
1J09-06-08OG	9/16"X18	3/4"X16	O908	30	36.8	19	24
1J09-08-04OG	3/4"X16	7/16"X20	O904	32	33	19	17
1J09-08-06OG	3/4"X16	9/16"X18	O906	33	33.5	19	19
1J09-08OG	3/4"X16	3/4"X16	O908	33	36.8	19	24
1J09-08-10OG	3/4"X16	7/8"X14	O910	34.8	44	22	27
1J09-08-12OG	3/4"X16	1.1/16"X12	O912	37.9	51	27	32
1J09-10-08OG	7/8"X14	3/4"X16	O908	38	40	22	27
1J09-10OG	7/8"X14	7/8"X14	O910	37.8	44	22	27
1J09-10-12OG	7/8"X14	1.1/16"X12	O912	41	51	27	32
1J09-12-08OG	1.1/16"X12	3/4"X16	O908	45	44	27	24
1J09-12-10OG	1.1/16"X12	7/8"X14	O910	44.2	47	27	27
1J09-12OG	1.1/16"X12	1.1/16"X12	O912	44.2	51	27	32
1J09-12-16OG	1.1/16"X12	1.5/16"X12	O916	47.8	54.5	33	41
1J09-14OG	1.3/16"X12	1.3/16"X12	O914	47.5	53	30	36
1J09-14-16OG	1.3/16"X12	1.5/16"X12	O916	48.5	54.5	33	41
1J09-16-12OG	1.5/16"X12	1.1/16"X12	O912	48.8	54.5	33	32
1J09-16-14OG	1.5/16"X12	1.3/16"X12	O914	49	56	33	36
1J09-16OG	1.5/16"X12	1.5/16"X12	O916	48.8	54.5	33	41
1J09-16-20OG	1.5/16"X12	1.5/8"X12	O920	53.8	59	41	50
1J09-20-16OG	1.5/8"X12	1.5/16"X12	O916	55.5	59.5	41	41
1J09-20OG	1.5/8"X12	1.5/8"X12	O920	55.3	59	41	50
1J09-20-24OG	1.5/8"X12	1.7/8"X12	O924	59.4	63	48	55
1J09-24OG	1.7/8"X12	1.7/8"X12	O924	62.5	63	48	55
1J09-32OG	2.1/2"X12	2.1/2"X12	O932	80	76	63	70

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 F端与ISO 11926-1油口相配。

Note: 1 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube. 2 F end is connected with ISO 11926-1 port.

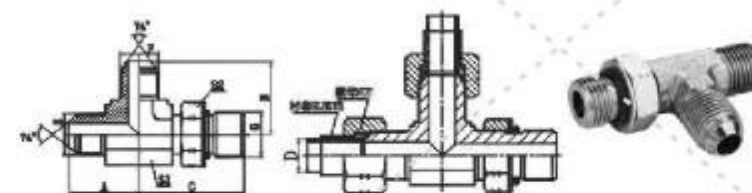

AJJO-OG

美制JIC外螺纹74° 外锥/ SAE外螺纹带O形
圈轻系列ISO 11926-3主支三通
JIC MALE 74° CONE / SAE O-RING
BOSS L-SERIES ISO 11926-3 RUN TEE

代号 PART NO.	螺纹 THREAD			O形圈 O-RING	尺寸 DIMENSIONS			
	E	F	G		A	B	C	S1 S2
AJJO-04OG	7/16"X20	7/16"X20	7/16"X20	O904	24.5	24.5	27.2	11 17
AJJO-05OG	1/2"X20	1/2"X20	1/2"X20	O905	26.6	26.6	29	14 17
AJJO-05-05-04OG	1/2"X20	1/2"X20	7/16"X20	O904	26.6	26.6	30	14 17
AJJO-06-06-04OG	9/16"X18	9/16"X18	7/16"X20	O904	26.9	26.9	30.1	14 17
AJJO-06-06-05OG	9/16"X18	9/16"X18	1/2"X20	O905	26.9	26.9	30	14 17
AJJO-06-06-08OG	9/16"X18	9/16"X18	3/4"X16	O908	30	30	37.5	19 24
AJJO-08OG	3/4"X16	3/4"X16	3/4"X16	O908	33	33	36.8	19 24
AJJO-08-08-06OG	3/4"X16	3/4"X16	9/16"X18	O906	32	32	33.5	19 19
AJJO-08-08-10OG	3/4"X16	3/4"X16	7/8"X14	O910	34.8	34.8	44	22 27
AJJO-10OG	7/8"X14	7/8"X14	7/8"X14	O910	37.8	37.8	44	22 27
AJJO-10-10-08OG	7/8"X14	7/8"X14	3/4"X16	O908	37.8	37.8	39.5	22 24
AJJO-12OG	1.1/16"X12	1.1/16"X12	1.1/16"X12	O912	44.2	44.2	51	27 32
AJJO-12-12-08OG	1.1/16"X12	1.1/16"X12	3/4"X16	O908	44.2	44.2	43	27 24
AJJO-12-12-10OG	1.1/16"X12	1.1/16"X12	7/8"X14	O910	44.2	44.2	49	27 27
AJJO-16OG	1.5/16"X12	1.5/16"X12	1.5/16"X12	O916	48.8	48.8	54.5	33 41
AJJO-20OG	1.5/8"X12	1.5/8"X12	1.5/8"X12	O920	55.3	55.3	59	41 50
AJJO-24OG	1.7/8"X12	1.7/8"X12	1.7/8"X12	O924	62.5	62.5	63	48 55

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 G端与ISO 11926-1油口相配




AJOJ-OG

美制JIC外螺纹74° 外锥/ SAE外螺纹带O形圈
轻系列ISO 11926-3分支三通
JIC MALE 74° CONE / SAE O-RING BOSS
L-SERIES ISO 11926-3 BRANCH TEE

代号 PART NO.	螺纹 THREAD			O形圈 O-RING	尺寸 DIMENSION			
	E	F	G		A	B	C	S1 S2
AJOJ-04OG	7/16"X20	7/16"X20	7/16"X20	O904	24.5	27.2	24.5	11 17
AJOJ-05-04-05OG	1/2"X20	7/16"X20	1/2"X20	O904	26.6	30	26.6	14 17
AJOJ-06-04-06OG	9/16"X18	7/16"X20	9/16"X18	O904	26.9	30	26.9	14 17
AJOJ-06-05-06OG	9/16"X18	1/2"X20	9/16"X18	O905	26.9	30	26.9	14 17
AJOJ-06OG	9/16"X18	9/16"X18	9/16"X18	O906	26.9	31.8	26.9	14 19
AJOJ-08-06-08OG	3/4"X16	9/16"X18	3/4"X16	O906	32	33.5	32	19 19
AJOJ-08OG	3/4"X16	3/4"X16	3/4"X16	O908	33	36.8	33	19 24
AJOJ-10-08-10OG	7/8"X14	3/4"X16	7/8"X14	O908	38	40	38	22 24
AJOJ-10OG	7/8"X14	7/8"X14	7/8"X14	O910	37.8	44	37.8	22 27
AJOJ-12-08-12OG	1.1/16"X12	3/4"X16	1.1/16"X12	O908	45	44	45	27 24
AJOJ-12-10-12OG	1.1/16"X12	7/8"X14	1.1/16"X12	O910	44.2	49	44.2	27 27
AJOJ-12OG	1.1/16"X12	1.1/16"X12	1.1/16"X12	O912	44.2	51	44.2	27 32
AJOJ-16OG	1.5/16"X12	1.5/16"X12	1.5/16"X12	O916	48.8	54.5	48.8	33 41
AJOJ-20-16-20OG	1.5/8"X12	1.5/16"X12	1.5/8"X12	O916	55.5	59.5	55.5	41 41
AJOJ-20OG	1.5/8"X12	1.5/8"X12	1.5/8"X12	O920	55.3	59	55.3	41 50
AJOJ-24OG	1.7/8"X12	1.7/8"X12	1.7/8"X12	O924	62.5	63	62.5	48 55

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 F端与ISO 11926-1油口相配

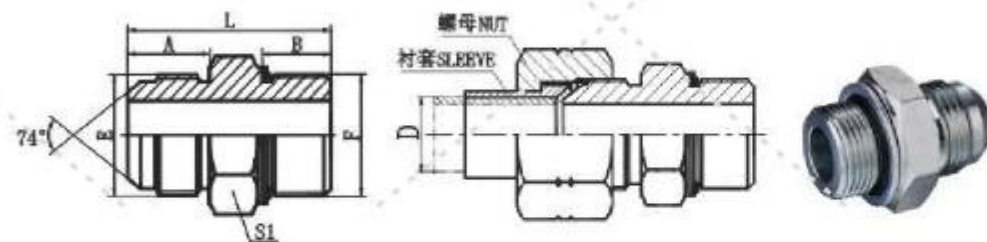


1JG

美制JIC外螺纹74° 外锥/
英管外螺纹O形圈
JIC MALE 74° CONE /
BSPP MALE O-RING

代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1JG-04-02	7/16"X20	G1/8"X28	O011	14	9.5	31	14
1JG-04	7/16"X20	G1/4"X19	O111	14	10	32.5	19
1JG-04-06	7/16"X20	G3/8"X19	O113	14	11.5	34	24
1JG-04-08	7/16"X20	G1/2"X14	O115	14	14	39	27
1JG-05-04	1/2"X20	G1/4"X19	O111	14	10	33	19
1JG-05-08	1/2"X20	G1/2"X14	O115	14	14	39	27
1JG-06-04	9/16"X18	G1/4"X19	O111	14.1	11	31.5	19
1JG-06	9/16"X18	G3/8"X19	O113	14.1	11.5	34	24
1JG-06-08	9/16"X18	G1/2"X14	O115	14.1	14	39	27
1JG-08-04	3/4"X16	G1/4"X19	O111	16.7	10	36	22
1JG-08-06	3/4"X16	G3/8"X19	O113	16.7	11.5	37	24
1JG-08	3/4"X16	G1/2"X14	O115	16.7	14	42	27
1JG-08-12	3/4"X16	G3/4"X14	O119	16.7	15.5	44	36
1JG-10-06	7/8"X14	G3/8"X19	O113	19.3	11.5	39.5	24
1JG-10-08	7/8"X14	G1/2"X14	O115	19.3	14	44.5	27
1JG-10-12	7/8"X14	G3/4"X14	O119	19.3	15.5	48.5	36
1JG-12-08	1.1/16"X12	G1/2"X14	O115	22	14	49	30
1JG-12	1.1/16"X12	G3/4"X14	O119	22	15.5	49.5	36
1JG-12-16	1.1/16"X12	G1"X11	O217	22	18	54	41
1JG-12-20	1.1/16"X12	G1.1/4"X11	O222	22	20	57	50
1JG-16-12	1.5/16"X12	G3/4"X14	O119	23	15.5	52.5	36
1JG-16	1.5/16"X12	G1"X11	O217	23	18	55	41
1JG-16-20	1.5/16"X12	G1.1/4"X11	O222	23	20	58	50
1JG-20-16	1.5/8"X12	G1"X11	O217	24.3	18	58	46
1JG-20	1.5/8"X12	G1.1/4"X11	O222	24.3	20	59.5	50
1JG-24-16	1.7/8"X12	G1"X11	O217	27.5	18	63.5	50
1JG-24-20	1.7/8"X12	G1.1/4"X11	O222	27.5	20	65.5	50
1JG-24	1.7/8"X12	G1.1/2"X11	O224	27.5	21.5	64	60

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。

Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

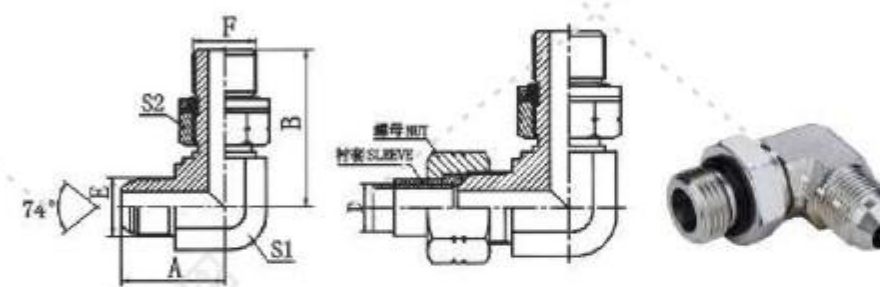

1JG9-OG

90° 弯美制JIC外螺纹74° 外锥/
英管外螺纹O形圈
90° ELBOW JIC MALE 74° CONE /
BSPP MALE O-RING


代号 PART NO.	螺纹 THREAD		O形圈 O-RING F端	尺寸 DIMENSIONS			
	E	F		A	B	S1	S2
1JG9-04-02OG	7/16"X20	G1/8"X28	O011	24.5	26.2	11	14
1JG9-04-06OG	7/16"X20	G3/8"X19	O113	27.5	36.8	16	22
1JG9-04OG	7/16"X20	G1/4"X19	O111	26.6	31.3	14	19
1JG9-05-04OG	1/2"X20	G1/4"X19	O111	26.5	31.8	14	19
1JG9-05-06OG	1/2"X20	G3/8"X19	O113	27.5	35.8	16	22
1JG9-06-04OG	9/16"X18	G1/4"X19	O111	26.9	31.3	14	19
1JG9-06-08OG	9/16"X18	G1/2"X14	O115	32.5	43.2	22	27
1JG9-06OG	9/16"X18	G3/8"X19	O113	28.5	35.8	16	22
1JG9-08-04OG	3/4"X16	G1/4"X19	O111	32	33.5	19	19
1JG9-08OG	3/4"X16	G1/2"X14	O115	34.8	43.2	22	27
1JG9-08-06OG	3/4"X16	G3/8"X19	O113	32	36.8	19	22
1JG9-08-12OG	3/4"X16	G3/4"X14	O119	37.9	49.3	27	32
1JG9-10-06OG	7/8"X14	G3/8"X19	O113	37.8	39.2	22	22
1JG9-10-08OG	7/8"X14	G1/2"X14	O115	37.8	43.2	22	27
1JG9-10-12OG	7/8"X14	G3/4"X14	O119	41	49.3	27	32
1JG9-12OG	1.1/16"X12	G3/4"X14	O119	44.2	49.3	27	32
1JG9-12-08OG	1.1/16"X12	G1/2"X14	O115	44.2	46.5	27	27
1JG9-12-16OG	1.1/16"X12	G1"X11	O217	48	53	33	41
1JG9-16OG	1.5/16"X12	G1"X11	O217	49	53	33	41
1JG9-16-12OG	1.5/16"X12	G3/4"X14	O119	49	53	33	32
1JG9-16-20OG	1.5/16"X12	G1.1/4"X11	O222	53.8	58	41	50
1JG9-20OG	1.5/8"X12	G1.1/4"X11	O222	55.5	58	41	50
1JG9-20-16OG	1.5/8"X12	G1"X11	O217	55.5	58	41	41
1JG9-24-16OG	1.7/8"X12	G1"X11	O217	62.5	63	48	41
1JG9-24-20OG	1.7/8"X12	G1.1/4"X11	O222	62.5	63	48	50
1JG9-24OG	1.7/8"X12	G1.1/2"X11	O224	62.5	63	48	55

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 F端与DIN 3852油口相配。

Note: 1 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube. 2 F end is connected with DIN 3852 port.

AJGJ-OG

JIC外螺纹74° 外锥/
英管外螺纹O形圈分支三通
90° ELBOW JIC MALE 74° CONE/
BSPP MALE O-RING BRANCH TEE

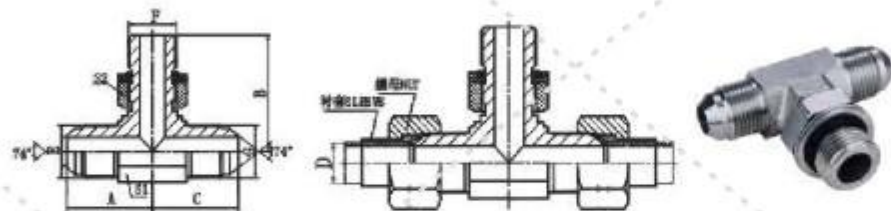


代号 PART NO.	螺纹 THREAD			O形圈 O-RING F端	尺寸 DIMENSIONS				
	E	F	G		A	B	C	S1	S2
AJGJ-04-02-04OG	7/16"X20	G1/8"X28	7/16"X20	O111	24.5	26.2	24.5	11	19
AJGJ-04OG	7/16"X20	G1/4"X19	7/16"X20	O111	26.6	31.8	26.6	14	19
AJGJ-05-02-05OG	1/2"X20	G1/8"X28	1/2"X20	O111	26.6	29	26.6	14	19
AJGJ-05-04-05OG	1/2"X20	G1/4"X19	1/2"X20	O111	26.6	31.8	26.6	14	19
AJGJ-06-04-06OG	9/16"X18	G1/4"X19	9/16"X18	O111	37	31	27	14	19
AJGJ-08-06-08OG	3/4"X16	G3/8"X19	3/4"X16	O113	33	37	33	19	22
AJGJ-08OG	3/4"X16	G1/2"X14	3/4"X16	O115	35	43.2	35	22	27
AJGJ-10-08-10OG	7/8"X14	G1/2"X14	7/8"X14	O115	37.8	43.5	37.8	22	27
AJGJ-12OG	1.1/16"X12	G3/4"X14	1.1/16"X12	O119	44.2	51	44.2	27	32
AJGJ-16OG	1.5/16"X12	G1"X11	1.5/16"X12	O217	48.8	53	48.8	33	41

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 F端与DIN 3852油口相配。

AJJG-OG

JIC外螺纹74° 外锥/
英管外螺纹O形圈主支三通
90° ELBOW JIC MALE 74° CONE/
BSPP MALE O-RING RUN TEE

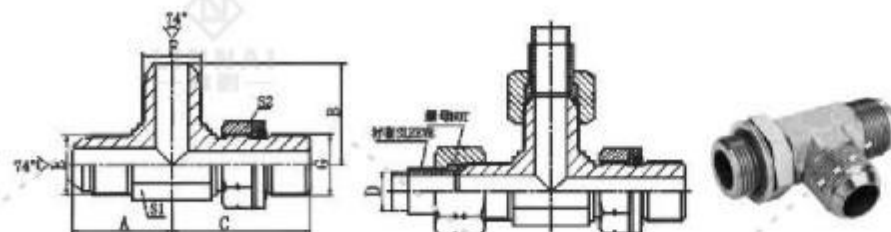


代号 PART NO.	螺纹 THREAD			O形圈 O-RING G端	尺寸 DIMENSIONS				
	E	F	G		A	B	C	S1	S2
AJJG-04OG	7/16"X20	7/16"X20	G1/4"X19	O111	26.6	26.5	31.9	14	19
AJJG-05-05-04OG	1/2"X20	1/2"X20	G1/4"X19	O111	26.6	26.6	31.3	14	19
AJJG-05-06-04OG	1/2"X20	9/16"X18	G1/4"X19	O111	26.6	26.9	31.3	14	19
AJJG-06OG	9/16"X18	9/16"X18	G3/8"X19	O113	28.5	28.5	36.8	16	22
AJJG-06-06-04OG	9/16"X18	9/16"X18	G1/4"X19	O111	26.9	26.9	31.3	14	19
AJJG-08OG	3/4"X16	3/4"X16	G1/2"X14	O115	35	35	43.2	22	27
AJJG-10-10-08OG	7/8"X14	7/8"X14	G1/2"X14	O115	37.8	37.8	44	22	27
AJJG-12OG	1.1/16"X12	1.1/16"X12	G3/4"X14	O119	44	44	49.5	27	32
AJJG-16OG	1.5/16"X12	1.5/16"X12	G1"X11	O217	48.8	48.8	53	33	41

注：1 螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。2 G端与DIN 3852油口相配。
Note: 1 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube. 2 G end is connected with DIN 3852 port.


1JB-WD

JIC外螺纹74° 外锥/
英管外螺纹胶垫密封
JIC MALE 74° CONE / BSPP
MALE CAPTIVE SEAL

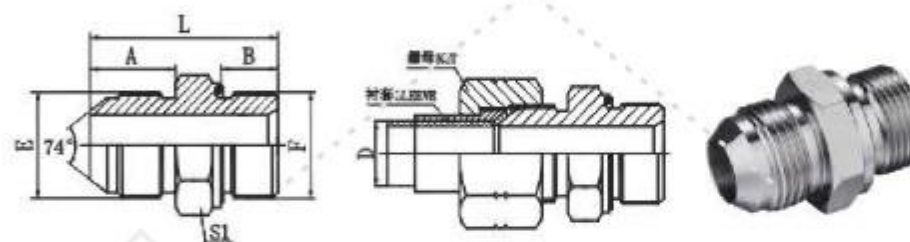

代号 PART NO.	螺纹 THREAD		胶垫 CAPTIVE F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1JB-04-02WD	7/16"X20	G1/8"X28	WD-B02	14	3	29.5	14
1JB-04WD	7/16"X20	G1/4"X19	WD-B04	14	12	34	19
1JB-04-06WD	7/16"X20	G3/8"X19	WD-B06	14	12	34.5	22
1JB-04-08WD	7/16"X20	G1/2"X14	WD-B08	14	14	41	27
1JB-05-04WD	1/2"X20	G1/4"X19	WD-B04	14	12	34	19
1JB-06-02WD	9/16"X18	G1/8"X28	WD-B02	14.1	8	29.5	17
1JB-06-04WD	9/16"X18	G1/4"X19	WD-B04	14.1	12	34	19
1JB-06WD	9/16"X18	G3/8"X19	WD-B06	14.1	12	34.5	22
1JB-06-08WD	9/16"X18	G1/2"X14	WD-B08	14.1	14	41	27
1JB-08-04WD	3/4"X16	G1/4"X19	WD-B04	16.7	12	37	22
1JB-08-06WD	3/4"X16	G3/8"X19	WD-B06	16.7	12	37.5	22
1JB-08WD	3/4"X16	G1/2"X14	WD-B08	16.7	14	43.5	27
1JB-10-08WD	7/8"X14	G1/2"X14	WD-B08	19.3	14	46.5	27
1JB-10-12WD	7/8"X14	G3/4"X14	WD-B12	19.3	16	47.5	32
1JB-12-08WD	1.1/16"X12	G1/2"X14	WD-B08	21.9	14	48.5	30
1JB-12WD	1.1/16"X12	G3/4"X14	WD-B12	21.9	16	50	32
1JB-12-16WD	1.1/16"X12	G1"X11	WD-B16	21.9	18	56	41
1JB-16-12WD	1.5/16"X12	G3/4"X14	WD-B12	23.1	16	53	36
1JB-16WD	1.5/16"X12	G1"X11	WD-B16	23.1	18	57	41
1JB-16-20WD	1.5/16"X12	G1.1/4"X11	WD-B20	23.1	20	61	50
1JB-20-16WD	1.5/8"X12	G1"X11	WD-B16	24.3	18	58	46
1JB-20WD	1.5/8"X12	G1.1/4"X11	WD-B20	24.3	20	62	50
1JB-20-24WD	1.5/8"X12	G1.1/2"X11	WD-B24	24.3	22	64	55
1JB-24-20WD	1.7/8"X12	G1.1/4"X11	WD-B20	27.5	20	65.5	50
1JB-24WD	1.7/8"X12	G1.1/2"X11	WD-B24	27.5	22	67.5	55

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。
Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

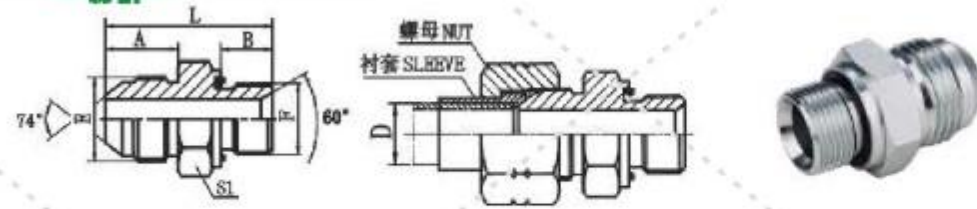


1JM-WD

JIC外螺纹74° 外锥/
公制外螺纹胶垫密封
JIC MALE 74° CONE/
METRIC MALE CAPTIVE SEAL

代号 PART NO.	螺纹 THREAD		胶垫 CAPTIVE F端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1
1JM-04-10WD	7/16"X20	M10X1	WD-B02	14	8	29.5	17
1JM-04-12WD	7/16"X20	M12X1.5	WD-M12	14	12	34	17
1JM-05-14WD	1/2"X20	M14X1.5	WD-B04	14	12	34	19
1JM-06-14WD	9/16"X18	M14X1.5	WD-B04	14.1	12	34	19
1JM-06-18WD	9/16"X18	M18X1.5	WD-M18	14.1	12	36.5	24
1JM-08-18WD	3/4"X16	M18X1.5	WD-M18	16.7	12	39	24
1JM-08-20WD	3/4"X16	M20X1.5	WD-M20	16.7	14	43	27
1JM-08-22WD	3/4"X16	M22X1.5	WD-M22	16.7	14	43.5	27
1JM-10-18WD	7/8"X14	M18X1.5	WD-M18	19.3	12	41.5	24
1JM-10-20WD	7/8"X14	M20X1.5	WD-M20	19.3	14	45.5	27
1JM-10-22WD	7/8"X14	M22X1.5	WD-M22	19.3	14	46	27
1JM-12-20WD	1.1/16"X12	M20X1.5	WD-M20	21.9	14	48.5	30
1JM-12-22WD	1.1/16"X12	M22X1.5	WD-M22	21.9	14	49	30
1JM-12-26WD	1.1/16"X12	M26X1.5	WD-B12	21.9	16	52	32
1JM-12-27WD	1.1/16"X12	M27X2	WD-B12	21.9	16	52	32
1JM-16-26WD	1.5/16"X12	M26X1.5	WD-B12	23.1	16	53	36
1JM-16-33WD	1.5/16"X12	M33X2	WD-B16	23.1	18	57	41
1JM-20-42WD	1.5/8"X12	M42X2	WD-B20	24.3	20	62	50
1JM-20-48WD	1.5/8"X12	M48X2	WD-B24	24.3	22	64	55
1JM-24-48WD	1.7/8"X12	M48X2	WD-B24	27.5	22	67.5	55


注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

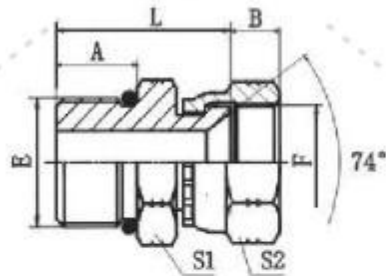

20J

制SAE外螺纹带O形圈轻系列ISO 11926-3/
JIC内螺纹74° 内锥
SAE O-RING BOSS L-SERIES ISO 11926-3/JIC
FEMALE 74° SEAT


代号 PART NO.	螺纹 THREAD		O形圈 O-RING E端	尺寸 DIMENSIONS			
	E	F		A	B	L	S1 S2
20J-04	7/16"X20	7/16"X20	O904	9.1	9	23	14 15
20J-05	1/2"X20	1/2"X20	O905	9.1	9	23.5	17 17
20J-06	9/16"X18	9/16"X18	O906	9.9	10.5	24.5	17 19
20J-08	3/4"X16	3/4"X16	O908	11.1	10.5	29.5	22 24
20J-10	7/8"X14	7/8"X14	O910	12.7	12	34	27 27
20J-12	1.1/16"X12	1.1/16"X12	O912	15.1	15	38.5	32 32
20J-14	1.3/16"X12	1.3/16"X12	O914	15.1	15	38.5	36 36
20J-16	1.5/16"X12	1.5/16"X12	O916	15.1	16	38.5	38 41
20J-20	1.5/8"X12	1.5/8"X12	O920	15.1	17	44	50 50
20J-24	1.7/8"X12	1.7/8"X12	O924	15.1	20	44.5	55 55
20J-32	2.1/2"X12	2.1/2"X12	O932	15.1	24.5	47	70 75

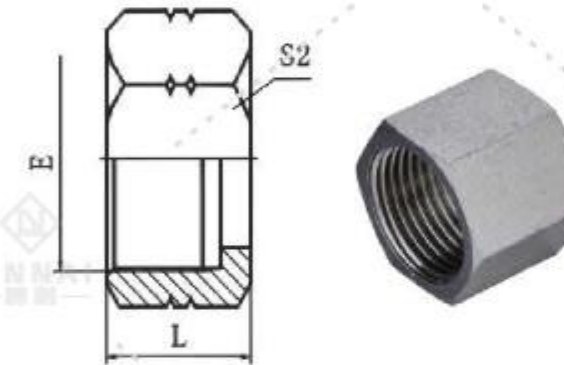

NB200

美制JIC扩口管接头螺母
JIC FLARE TUBE END NUT


代号 PART NO.	螺纹 THREAD E	英制衬套INCH SLEEVE		公制衬套METRIC SLEEVE		尺寸 DIMENSIONS	
		管子外径O.D.	衬套代号 NO.	管子外径O.D.	衬套代号 NO.	L	S2
NB200-04	7/16"X20	1/4"	NB300-04	6	NB500-06	15.8	14
NB200-05	1/2"X20	5/16"	NB300-05	8	NB500-08	17.3	17
NB200-06	9/16"X18	3/8"	NB300-06	10	NB500-10	18.5	19
NB200-08	3/4"X16	1/2"	NB300-08	12	NB500-12	21.6	24
NB200-10	7/8"X14			14	NB500-14	24.9	27
NB200-10	7/8"X14			15	NB500-15	24.9	27
NB200-10	7/8"X14	5/8"	NB300-10	16	NB500-16	24.9	27
NB200-12	1.1/16"X12	3/4"	NB300-12	18	NB500-18	26.2	32
NB200-12A	1.1/16"X12			20	NB500-20A	26.2	32
NB200-14	1.3/16"X12			20	NB500-20	27.7	36
NB200-14	1.3/16"X12	7/8"	NB300-14	22	NB500-22	27.7	36
NB200-16	1.5/16"X12	1"	NB300-16	25	NB500-25	28.7	38
NB200-20	1.5/8"X12			28	NB500-28	31.2	50
NB200-20	1.5/8"X12			30	NB500-30	31.2	50
NB200-20	1.5/8"X12	1.1/4"	NB300-20	32	NB500-32	31.2	50
NB200-24	1.7/8"X12			35	NB500-35	36.1	60
NB200-24	1.7/8"X12	1.1/2"	NB300-24	38	NB500-38	36.1	60
NB200-32	2.1/2"X12	2"	NB300-32	50	NB500-50	44.5	75



NB300

JIC 英制管衬套
JIC INCH SLEEVE


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS	
			D	L
NB300-04	7/16"X20	1/4"	9.73	10.4
NB300-05	1/2"X20	5/16"	11.3	11.2
NB300-06	9/16"X18	3/8"	12.75	12.7
NB300-08	3/4"X16	1/2"	17.32	14.2
NB300-10	7/8"X14	5/8"	20.24	16.8
NB300-12	1.1/16"X12	3/4"	24.69	17.3
NB300-14	1.3/16"X12	7/8"	27.86	19.3
NB300-16	1.5/16"X12	1"	31.04	19.8
NB300-20	1.5/8"X12	1.1/4"	38.96	23.1
NB300-24	1.7/8"X12	1.1/2"	45.31	28.4
NB300-32	2.1/2"X12	2"	61.19	30.2



NB500

JIC 公制管衬套
JIC METRIC SLEEVE


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS	
			D	L
NB500-06	7/16"X20	6	9.7	10.4
NB500-08	1/2"X20	8	11.3	11.2
NB500-10	9/16"X18	10	12.7	12.7
NB500-12	3/4"X16	12	17.3	14.2
NB500-15	7/8"X14	15	20.2	16.8
NB500-16	7/8"X14	16	20.2	16.8
NB500-18	1.1/16"X12	18	24.7	17.3
NB500-20A	1.1/16"X12	20	24.7	17.3
NB500-20	1.3/16"X12	20	27.8	19.3
NB500-22	1.3/16"X12	22	27.8	19.3
NB500-25	1.5/16"X12	25	31	19.8
NB500-28	1.5/8"X12	28	38.9	23.1
NB500-30	1.5/8"X12	30	38.9	23.1
NB500-32	1.5/8"X12	32	38.9	23.1
NB500-35	1.7/8"X12	35	45.3	28.4
NB500-38	1.7/8"X12	38	45.3	28.4
NB500-50	2.1/2"X12	50	61.2	30.2



1F

美制ORFS外螺纹O形圈平面密封
ORFS MALE O-RING


代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	L	S1
1F-04	9/16"X18	9/16"X18	O011	O011	9.8	9.8	27.5	17
1F-04-06	9/16"X18	11/16"X16	O011	O012	9.8	11.2	29.7	19
1F-04-08	9/16"X18	13/16"X16	O011	O014	9.8	12.8	32.5	22
1F-06	11/16"X16	11/16"X16	O012	O012	11.2	11.2	31.1	19
1F-06-08	11/16"X16	13/16"X16	O012	O014	11.2	12.8	33.8	22
1F-06-10	11/16"X16	1"X14	O012	O016	11.2	15.5	38	27
1F-08	13/16"X16	13/16"X16	O014	O014	12.8	12.8	35.4	22
1F-08-10	13/16"X16	1"X14	O014	O016	12.8	15.5	40	27
1F-08-12	13/16"X16	1.3/16"X12	O014	O018	12.8	17	43	32
1F-10	1"X14	1"X14	O016	O016	15.5	15.5	42.5	27
1F-10-12	1"X14	1.3/16"X12	O016	O018	15.5	17	45.5	32
1F-12	1.3/16"X12	1.3/16"X12	O018	O018	17	17	47.1	32
1F-12-16	1.3/16"X12	1.7/16"X12	O018	O021	17	17.5	45.5	38
1F-12-20	1.3/16"X12	1.11/16"X12	O018	O025	17	17.5	50.5	46
1F-16	1.7/16"X12	1.7/16"X12	O021	O021	17.5	17.5	49.3	38
1F-16-20	1.7/16"X12	1.11/16"X12	O021	O025	17.5	17.5	51.3	46
1F-16-24	1.7/16"X12	2"X12	O021	O029	17.5	17.5	53	55
1F-20	1.11/16"X12	1.11/16"X12	O025	O025	17.5	17.5	51.3	46
1F-20-24	1.11/16"X12	2"X12	O025	O029	17.5	17.5	53	55
1F-24	2"X12	2"X12	O029	O029	17.5	17.5	53	55



1F9

90° 弯美制ORFS外螺纹O形圈平面密封
90° ELBOW ORFS MALE O-RING


代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	L	S1
1F9-04	9/16"X18	9/16"X18	O011	O011	23	23	14	
1F9-04-06	9/16"X18	11/16"X16	O011	O012	25.5	27	19	
1F9-06	11/16"X16	11/16"X16	O012	O012	27.5	27.5	19	
1F9-06-08	11/16"X16	13/16"X16	O012	O014	29	31	22	
1F9-08	13/16"X16	13/16"X16	O014	O014	31	31	22	
1F9-08-12	13/16"X16	1.3/16"X12	O014	O018	35.5	40.3	30	
1F9-10	1"X14	1"X14	O016	O016	36.5	36.5	27	
1F9-12	1.3/16"X12	1.3/16"X12	O018	O018	41	41	30	
1F9-16	1.7/16"X12	1.7/16"X12	O021	O021	44.5	44.5	36	
1F9-20	1.11/16"X12	1.11/16"X12	O025	O025	47.5	47.5	41	
1F9-24	2"X12	2"X12	O029	O029	53.5	53.5	50	

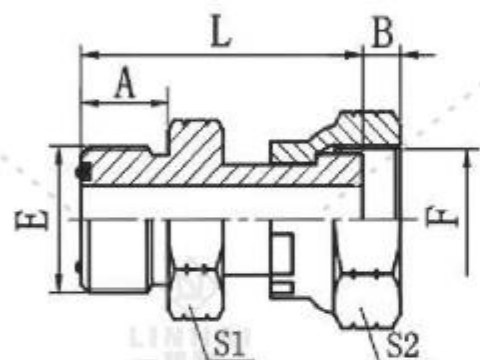

2F

美制ORFS外螺纹O形圈平面密封/
ORFS内螺纹
ORFS MALE O-RING/ ORFS FEMALE


代号	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS				
PART NO.	E	F	E端	A	B	L	S1	S2
2F-04	9/16"X18	9/16"X18	O011	9.8	8.5	33	17	19
2F-04-06	9/16"X18	11/16"X16	O011	9.8	10	34.5	17	22
2F-04-08	9/16"X18	13/16"X16	O011	9.8	11	36.5	19	27
2F-06-04	11/16"X16	9/16"X18	O012	11.2	8.5	35.5	19	19
2F-06	11/16"X16	11/16"X16	O012	11.2	10	38.5	19	22
2F-06-08	11/16"X16	13/16"X16	O012	11.2	11	37.7	19	27
2F-06-10	11/16"X16	1"X14	O012	11.2	13.5	43.7	24	30
2F-08-06	13/16"X16	11/16"X16	O014	13	10	41	22	22
2F-08	13/16"X16	13/16"X16	O014	13	11	43	22	27
2F-08-10	13/16"X16	1"X14	O014	13	13.5	45.5	24	30
2F-08-12	13/16"X16	1.3/16"X12	O014	13	15	49	30	36
2F-10-08	1"X14	13/16"X16	O016	15.5	11	47.5	27	27
2F-10	1"X14	1"X14	O016	15.5	13.5	51.5	27	30
2F-10-12	1"X14	1.3/16"X12	O016	15.5	15	51.5	30	36
2F-10-16	1"X14	1.7/16"X12	O016	15.5	15	56	36	41
2F-12-08	1.3/16"X12	13/16"X16	O018	17	11	50.5	32	27
2F-12-10	1.3/16"X12	1"X14	O018	17	13.5	54.5	32	30
2F-12	1.3/16"X12	1.3/16"X12	O018	17	15	56	32	36
2F-12-16	1.3/16"X12	1.7/16"X12	O018	17	15	58	36	41
2F-16-12	1.7/16"X12	1.3/16"X12	O021	17.5	15	58	38	36
2F-16	1.7/16"X12	1.7/16"X12	O021	17.5	15	60	38	41
2F-16-20	1.7/16"X12	1.11/16"X12	O021	17.5	15	62	41	50
2F-20-16	1.11/16"X12	1.7/16"X12	O025	17.5	15	58.5	46	41
2F-20	1.11/16"X12	1.11/16"X12	O025	17.5	15	62	46	50
2F-20-24	1.11/16"X12	2"X12	O025	17.5	16	65.5	50	60
2F-24-20	2"X12	1.11/16"X12	O029	17.5	15	64	55	50
2F-24	2"X12	2"X12	O029	17.5	16	64	55	60



2F9

30° 弯美制ORFS外螺纹O形圈平面密封
ORFS内螺纹
90° ELBOW ORFS MALE O-RING / ORFS FEMALE


代号	螺纹 THREAD		O形圈 O-RING	尺寸 DIMENSIONS			
PART NO.	E	F	E端	A	B	S1	S2
2F9-04	9/16"X18	9/16"X18	O011	23	8.5	14	19
2F9-04-06	9/16"X18	11/16"X16	O011	23	10	14	22
2F9-06-04	11/16"X16	9/16"X18	O012	27.5	8.5	19	19
2F9-06	11/16"X16	11/16"X16	O012	27.5	10	19	22
2F9-06-08	11/16"X16	13/16"X16	O012	27	11	19	27
2F9-08-06	13/16"X16	11/16"X16	O014	31	10	22	22
2F9-08	13/16"X16	13/16"X16	O014	31	11	22	27
2F9-10-08	1"X14	13/16"X16	O016	36.5	11	27	27
2F9-10	1"X14	1"X14	O016	36.5	15	27	30
2F9-10-12	1"X14	1.3/16"X12	O016	36.5	15	27	36
2F9-12	1.3/16"X12	1.3/16"X12	O018	41	15	30	36
2F9-12-16	1.3/16"X12	1.7/16"X12	O018	42.5	15	33	41
2F9-16-12	1.7/16"X12	1.3/16"X12	O021	44.5	15	36	36
2F9-16	1.7/16"X12	1.7/16"X12	O021	44.5	15	36	41
2F9-20	1.11/16"X12	1.11/16"X12	O025	44.5	15	41	50
2F9-24	2"X12	2"X12	O029	53.5	15	50	60

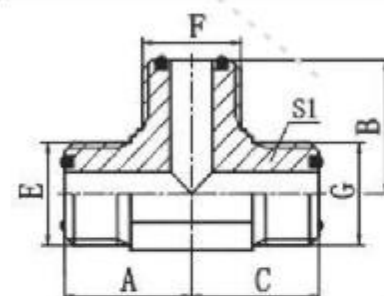

AF

美制ORFS外螺纹O形圈平面密封三通
ORFS MALE O-RING TEE

代号	螺纹 THREAD			O形圈 O-RING			尺寸 DIMENSIONS			
PART NO.	E	F	G	E端	F端	G端	A	B	C	S1
AF-04	9/16"X18	9/16"X18	9/16"X18	O011	O011	O011	23	23	23	14
AF-06	11/16"X16	11/16"X16	11/16"X16	O012	O012	O012	27	27	27	19
AF-08	13/16"X16	13/16"X16	13/16"X16	O014	O014	O014	31	31	31	22
AF-10	1"X14	1"X14	1"X14	O016	O016	O016	36.5	36.5	36.5	27
AF-12	1.3/16"X12	1.3/16"X12	1.3/16"X12	O018	O018	O018	40.3	40.3	40.3	30
AF-16	1.7/16"X12	1.7/16"X12	1.7/16"X12	O021	O021	O021	44.5	44.5	44.5	36
AF-20	1.11/16"X12	1.11/16"X12	1.11/16"X12	O025	O025	O025	47.5	47.5	47.5	41
AF-24	2"X12	2"X12	2"X12	O029	O029	O029	53.5	53.5	53.5	50

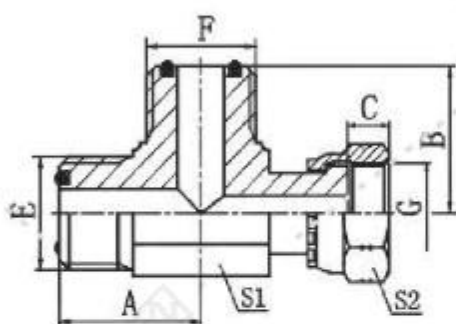


CF

美制ORFS外螺纹O形圈平面密封/
美制ORFS内螺纹平面主支三通
ORFS MALE O-RING /
ORFS FEMALE RUN TEE



代号 PART NO.	螺纹 THREAD			O形圈 O-RING		尺寸 DIMENSIONS				
	E	F	G	E端	F端	A	B	C	S1	S2
CF-04	9/16"X18	9/16"X18	9/16"X18	O011	O011	23	23	8.5	14	19
CF-06	11/16"X16	11/16"X16	11/16"X16	O012	O012	27.5	27.5	10	19	22
CF-08	13/16"X16	13/16"X16	13/16"X16	O014	O014	31	31	11	22	27
CF-10	1"X14	1"X14	1"X14	O016	O016	36.5	36.5	13.5	27	30
CF-12	1.3/16"X12	1.3/16"X12	1.3/16"X12	O018	O018	40.3	40.3	15	30	36
CF-16	1.7/16"X12	1.7/16"X12	1.7/16"X12	O021	O021	44.5	44.5	15	36	41
CF-20	1.11/16"X12	1.11/16"X12	1.11/16"X12	O025	O025	47.5	47.5	15	41	50
CF-24	2"X12	2"X12	2"X12	O029	O029	53.5	53.5	15	50	60

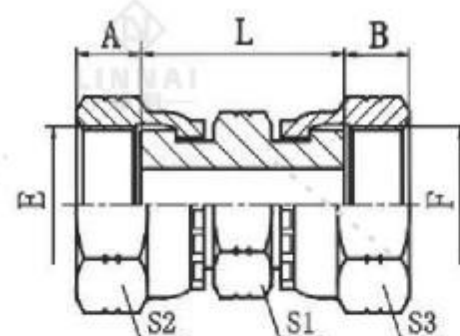


3F

美制ORFS内螺纹
ORFS FEMALE



代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2,S3
3F-04	9/16"X18	9/16"X18	8.5	8.5	33.5	19	19
3F-06	11/16"X16	11/16"X16	10	10	40.5	22	22
3F-08	13/16"X16	13/16"X16	11	11	44.5	27	27
3F-10	1"X14	1"X14	13.5	13.5	52.5	30	30
3F-12	1.3/16"X12	1.3/16"X12	15	15	56	36	36
3F-16	1.7/16"X12	1.7/16"X12	15	15	60	41	41
3F-20	1.11/16"X12	1.11/16"X12	15	15	59.5	50	50
3F-24	2"X12	2"X12	16	16	64	60	60

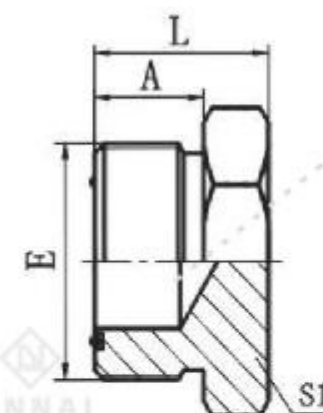


4F

美制ORFS外螺纹O形圈平面密封堵头
ORFS MALE O-RING PLUG



代号 PART NO.	螺纹 THREAD	O形圈 O-RING	尺寸 DIMENSIONS		
	E	E端	A	L	S1
4F-04	9/16"X18	O011	9.8	16.8	17
4F-06	11/16"X16	O012	11.2	19.2	19
4F-08	13/16"X16	O014	12.8	21.8	22
4F-10	1"X14	O016	15.5	25.9	27
4F-12	1.3/16"X12	O018	17	27.4	32
4F-16	1.7/16"X12	O021	17.5	27.9	38
4F-20	1.11/16"X12	O025	17.5	27.9	46
4F-24	2"X12	O029	17.5	27.9	55

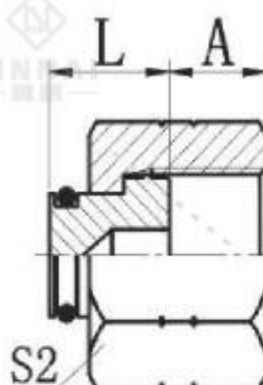


9F

美制ORFS内螺纹堵头
ORFS FEMALE PLUG



代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS		
	E	A	L	S2
9F-04	9/16"X18	8.5	10.5	19
9F-06	11/16"X16	10	13	22
9F-08	13/16"X16	11	14	27
9F-10	1"X14	13.5	16	30
9F-12	1.3/16"X12	15	15	36
9F-16	1.7/16"X12	15	18	41
9F-20	1.11/16"X12	15	19	50
9F-24	2"X12	16	21	60

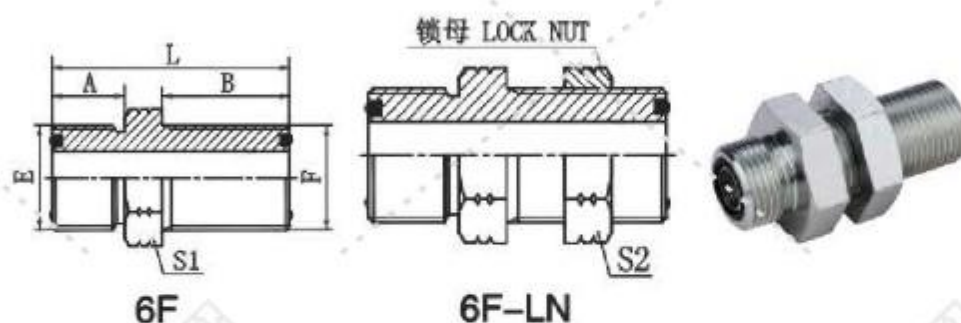


美制ORFS外螺纹
O形圈平面密封过板接头
ORFS MALE O-RING
BULKHEAD

代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS				
	E	F	E端	F端	A	B	L	S1	S2
6F-04	9/16"X18	9/16"X18	O011	O011	9.8	31.5	48.2	22	22
6F-06	11/16"X16	11/16"X16	O012	O012	11.2	34	53.2	27	27
6F-08	13/16"X16	13/16"X16	O014	O014	12.8	36.5	58.3	30	30
6F-10	1"X14	1"X14	O016	O016	15.5	40.6	66.6	36	36
6F-12	1.3/16"X12	1.3/16"X12	O018	O018	17	41.7	69.2	38	38
6F-16	1.7/16"X12	1.7/16"X12	O021	O021	17.5	42.2	70.2	46	46
6F-20	1.11/16"X12	1.11/16"X12	O025	O025	17.5	42.2	70.2	50	50
6F-24	2"X12	2"X12	O029	O029	17.5	42.2	70.2	60	60

注：如需带锁母订货，则在代号后加“LN”，如6F-16LN，锁母代号为8F。

Note: In case if you are interested to order the adapter with lock nut, please insert suffix "LN" after our part no., for example 6F-16LN, The lock nut no. is 8F.

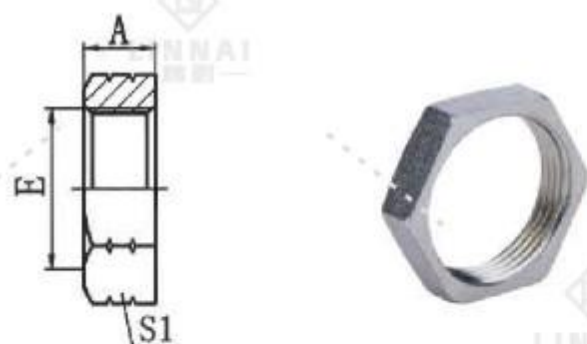


8F

美制ORFS锁母
ORFS LOCK NUT

代号 PART NO.	螺纹 THREAD	尺寸 DIMENSIONS	
	E	A	S1
8F-04	9/16"X18	7	22
8F-06	11/16"X16	8	27
8F-08	13/16"X16	9	30
8F-10	1"X14	10.4	36
8F-12	1.3/16"X12	10.4	38
8F-16	1.7/16"X12	10.4	46
8F-20	1.11/16"X12	10.4	50
8F-24	2"X12	10.4	60

注：8F-04 与8J-06同。 Note: 8F-04 is the same as 8J-06.

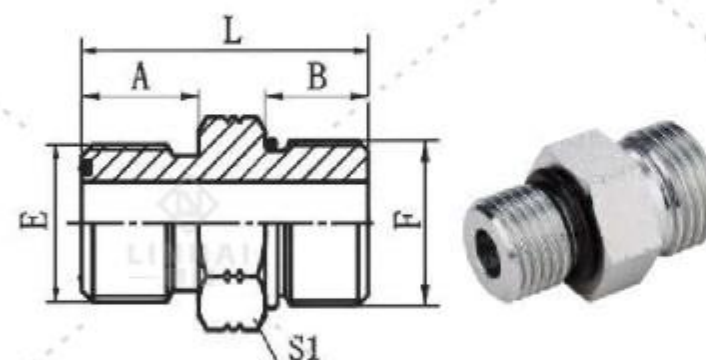


1FO

美制ORFS外螺纹O形圈平面密封/
美制SAE外螺纹带O形圈重系列ISO 11926-2
ORFS MALE O-RING/SAE O-RING
BOSS S-SERIES ISO 11926-2

代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	L	S1
1FO-04	9/16"X18	7/16"X20	O011	O904	9.8	11	28.7	17
1FO-04-05	9/16"X18	1/2"X20	O011	O905	9.8	11	28.7	17
1FO-04-06	9/16"X18	9/16"X18	O011	O906	9.8	12	29.5	17
1FO-04-08	9/16"X18	3/4"X16	O011	O908	9.8	14	33.5	22
1FO-06-04	11/16"X16	7/16"X20	O012	O904	11.2	11	31	19
1FO-06	11/16"X16	9/16"X18	O012	O906	11.2	12	31.9	19
1FO-06-08	11/16"X16	3/4"X16	O012	O908	11.2	14	35	22
1FO-06-10	11/16"X16	7/8"X14	O012	O910	11.2	16	38.5	27
1FO-08-06	13/16"X16	9/16"X18	O014	O906	12.8	12	34.5	22
1FO-08	13/16"X16	3/4"X16	O014	O908	12.8	14	36.6	22
1FO-08-10	13/16"X16	7/8"X14	O014	O910	12.8	16	40.5	27
1FO-08-12	13/16"X16	1.1/16"X12	O014	O912	12.8	18.5	44.5	32
1FO-10	1"X14	7/8"X14	O016	O910	15.5	16	43.1	27
1FO-10-08	1"X14	3/4"X16	O016	O908	15.5	14	41	27
1FO-10-12	1"X14	1.1/16"X12	O016	O912	15.5	18.5	47	32
1FO-12-10	1.3/16"X12	7/8"X14	O018	O910	17	16	46	32
1FO-12	1.3/16"X12	1.1/16"X12	O018	O912	17	18.5	48.6	32
1FO-12-16	1.3/16"X12	1.5/16"X12	O018	O916	17	18.5	49.8	38
1FO-16-12	1.7/16"X12	1.1/16"X12	O021	O912	17.5	18.5	50	38
1FO-16	1.7/16"X12	1.5/16"X12	O021	O916	17.5	18.5	50.3	38
1FO-16-20	1.7/16"X12	1.5/8"X12	O021	O920	17.5	18.5	52	50
1FO-20-16	1.11/16"X12	1.5/16"X12	O025	O916	17.5	18.5	52	46
1FO-20	1.11/16"X12	1.5/8"X12	O025	O920	17.5	18.5	52.3	50
1FO-24-20	2"X12	1.5/8"X12	O029	O920	17.5	18.5	54	55
1FO-24	2"X12	1.7/8"X12	O029	O924	17.5	18.5	54.1	55

注：F端与ISO 11926-1油口相配。

Note: F end is connected with ISO 11926-1 port.

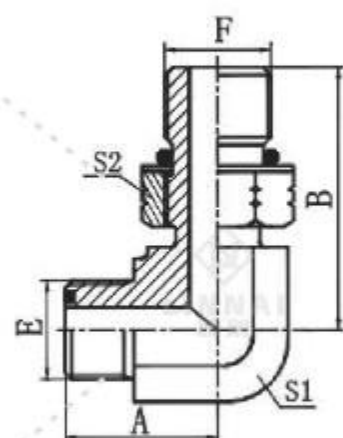


1FO9-OG

90° 弯美制ORFS外螺纹O形圈平面密封/
美制SAE外螺纹带O形圈重系列ISO 11926-2
90° ELBOW ORFS MALE O-RING /
SAE O-RING BOSS S-SERIES ISO 11926-2

代号 PART NO.	螺纹 THREAD		O形圈 O-RING		尺寸 DIMENSIONS			
	E	F	E端	F端	A	B	S1	S2
1FO9-04OG	9/16"X18	7/16"X20	O011	O904	23	30.3	14	17
1FO9-04-06OG	9/16"X18	9/16"X18	O011	O906	23	32	14	19
1FO9-06-04OG	11/16"X16	7/16"X20	O012	O904	27.5	33.5	19	17
1FO9-06OG	11/16"X16	9/16"X18	O012	O906	27.5	34.5	19	19
1FO9-06-08OG	11/16"X16	3/4"X16	O012	O908	27.5	38	19	24
1FO9-08-06OG	13/16"X16	9/16"X18	O014	O906	31	37	22	19
1FO9-08OG	13/16"X16	3/4"X16	O014	O908	31	40.5	22	24
1FO9-08-10OG	13/16"X16	7/8"X14	O014	O910	31	45.3	22	27
1FO9-08-12OG	13/16"X16	1.1/16"X12	O014	O912	34.5	52	27	32
1FO9-10-08OG	1"X14	3/4"X16	O016	O908	36.5	45	27	24
1FO9-10OG	1"X14	7/8"X14	O016	O910	36.5	50.8	27	27
1FO9-10-12OG	1"X14	1.1/16"X12	O016	O912	36.5	52	27	32
1FO9-12-10OG	1.3/16"X12	7/8"X14	O018	O910	41	52.8	30	27
1FO9-12OG	1.3/16"X12	1.1/16"X12	O018	O912	41	54	30	32
1FO9-12-16OG	1.3/16"X12	1.5/16"X12	O018	O916	43	55.5	33	41
1FO9-16-12OG	1.7/16"X12	1.1/16"X12	O021	O912	44.5	59	36	32
1FO9-16OG	1.7/16"X12	1.5/16"X12	O021	O916	44.5	59	36	41
1FO9-20OG	1.11/16"X12	1.5/8"X12	O025	O920	47.5	60.5	41	50
1FO9-20-24OG	1.11/16"X12	1.7/8"X12	O025	O924	51.5	66.5	48	55
1FO9-24-20OG	2"X12	1.5/8"X12	O029	O920	53.5	67.5	50	50
1FO9-24OG	2"X12	1.7/8"X12	O029	O924	53.5	67.5	50	55

注：F端与ISO 11926-1油口相配。 Note: F end is connected with ISO 11926-1 port.

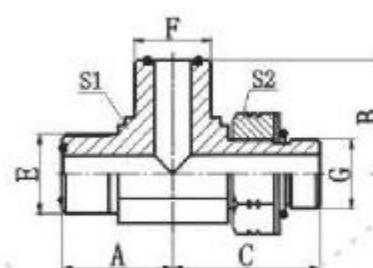


AFFO-OG

美制ORFS外螺纹O形圈平面密封/ 美制SAE外螺
纹带O形圈重系列ISO 11926-2主支三通
ORFS MALE O-RING / SAE O-RING BOSS
S-SERIES ISO 11926-2 RUN TEE

代号 PART NO.	螺纹 THREAD			O形圈 O-RING			尺寸 DIMENSIONS				
	E	F	G	E端	F端	G端	A	B	C	S1	S2
AFFO-04OG	9/16"X18	9/16"X18	7/16"X20	O011	O011	O904	23	23	30	14	17
AFFO-04-04-06OG	9/16"X18	9/16"X18	9/16"X18	O011	O011	O906	23	23	32	14	19
AFFO-06OG	11/16"X16	11/16"X16	9/16"X18	O012	O012	O906	27.5	27.5	35.5	19	19
AFFO-06-06-08OG	11/16"X16	11/16"X16	3/4"X16	O012	O012	O908	27.5	27.5	38	19	24
AFFO-08-08-06OG	13/16"X16	13/16"X16	9/16"X18	O014	O014	O906	31	31	37.5	22	19
AFFO-08-08-10OG	13/16"X16	13/16"X16	7/8"X14	O014	O014	O910	31	31	45.3	22	27
AFFO-08OG	13/16"X16	13/16"X16	3/4"X16	O014	O014	O908	31	31	40.5	22	24
AFFO-08-08-12OG	13/16"X16	13/16"X16	1.1/16"X12	O014	O014	O912	34.5	34.5	54	27	32
AFFO-10OG	1"X14	1"X14	7/8"X14	O016	O016	O910	36.5	36.5	50.8	27	27
AFFO-10-10-12OG	1"X14	1"X14	1.1/16"X12	O016	O016	O912	36.5	36.5	52	27	32
AFFO-12OG	1.3/16"X12	1.3/16"X12	1.1/16"X12	O018	O018	O912	40.3	40.3	55.3	30	32
AFFO-16-16-12OG	1.7/16"X12	1.7/16"X12	1.1/16"X12	O021	O021	O912	44.5	44.5	59.5	36	32
AFFO-16OG	1.7/16"X12	1.7/16"X12	1.5/16"X12	O021	O021	O916	44.5	44.5	59.3	36	41
AFFO-20OG	1.11/16"X12	1.11/16"X12	1.5/8"X12	O025	O025	O920	47.5	47.5	60.5	41	50
AFFO-24OG	2"X12	2"X12	1.7/8"X12	O029	O029	O924	53.5	53.5	68.5	50	55

注：F端与ISO 11926-1油口相配。 Note: F end is connected with ISO 11926-1 port.




AFOF-OG

美制ORFS外螺纹O形圈平面密封/ 美制SAE外螺
纹带O形圈重系列ISO 11926-2分支三通
ORFS MALE O-RING / SAE O-RING BOSS
S-SERIES ISO 11926-2 BRANCH TEE

代号 PART NO.	螺纹 THREAD			O形圈 O-RING			尺寸 DIMENSIONS				
	E	F	G	E端	F端	G端	A	B	C	S1	S2
AFOF-04OG	9/16"X18	7/16"X20	9/16"X18	O011	O904	O011	23	30.3	23	14	17
AFOF-04-06-04OG	9/16"X18	9/16"X18	9/16"X18	O011	O906	O011	23	32	23	14	19
AFOF-06OG	11/16"X16	9/16"X18	11/16"X16	O012	O906	O012	27.5	35.5	27.5	19	19
AFOF-06-08-06OG	11/16"X16	3/4"X16	11/16"X16	O012	O908	O012	27	38	27	19	24
AFOF-08OG	13/16"X16	3/4"X16	13/16"X16	O014	O908	O014	31	40.5	31	22	24
AFOF-08-12-08OG	13/16"X16	1.1/16"X12	13/16"X16	O014	O912	O014	34.5	54	34.5	27	32
AFOF-10OG	1"X14	7/8"X14	1"X14	O016	O910	O016	36.5	50.8	36.5	27	27
AFOF-10-12-10OG	1"X14	1.1/16"X12	1"X14	O016	O912	O016	36.5	52	36.5	27	32
AFOF-12OG	1.3/16"X12	1.1/16"X12	1.3/16"X12	O018	O912	O018	40.3	55.3	40.3	30	32
AFOF-16OG	1.7/16"X12	1.5/16"X12	1.7/16"X12	O021	O916	O021	41.5	59.3	41.5	36	41
AFOF-20OG	1.11/16"X12	1.5/8"X12	1.11/16"X12	O025	O920	O025	47.5	60.5	47.5	41	50
AFOF-24OG	2"X12	1.7/8"X12	2"X12	O029	O924	O029	53.5	68	53.5	50	55


注：F端与ISO 11926-1油口相配。 Note: F end is connected with ISO 11926-1 port.

20F

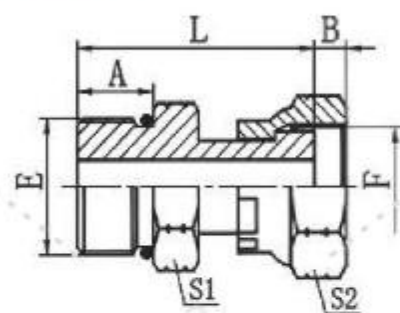

美制SAE外螺纹带O形圈
重系列ISO 11926-2 / ORFS内螺纹
SAE O-RING BOSS S-SERIES ISO
11926-2 / ORFS FEMALE

代号 PART NO.	螺纹 THREAD		O形圈 O-RING E端	尺寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
20F-04	7/16"X20	9/16"X18	O904	11	8.5	32.5	17	19
20F-04-06	7/16"X20	11/16"X16	O904	11	10	35.5	17	22
20F-06-04	9/16"X18	9/16"X18	O906	12	8.5	33.5	17	19
20F-06	9/16"X18	11/16"X16	O906	12	10	36.5	19	22
20F-06-08	9/16"X18	13/16"X16	O906	12	11	38.5	19	27
20F-08-06	3/4"X16	11/16"X16	O908	14	10	40.5	22	22
20F-08	3/4"X16	13/16"X16	O908	14	11	42.5	22	27
20F-10-08	7/8"X14	13/16"X16	O910	16	11	46.5	27	27
20F-10	7/8"X14	1"X14	O910	16	13.5	50.5	27	30
20F-12-10	1.1/16"X12	1"X14	O912	18.5	13.5	54	32	30
20F-12	1.1/16"X12	1.3/16"X12	O912	18.5	15	56	32	36
20F-16-12	1.5/16"X12	1.3/16"X12	O916	18.5	15	55.5	38	36
20F-16	1.5/16"X12	1.7/16"X12	O916	18.5	15	57.5	38	41
20F-20-16	1.5/8"X12	1.7/16"X12	O920	18.5	15	61.5	50	41
20F-20	1.5/8"X12	1.11/16"X12	O920	18.5	15	65	50	50
20F-24	2"X12	1.7/8"X12	O924	18.5	16	65	55	60




20F9-OG

90° 弯美制SAE外螺纹带O形圈重系列ISO
11926-2 / ORFS内螺纹
90° ELBOW SAE O-RING BOSS S-SERIES
ISO 11926-2 / ORFS FEMALE

代号 PART NO.	螺纹 THREAD		O形圈 O-RING E端	尺寸 DIMENSIONS				
	E	F		A	B	S1	S2	S3
20F9-04OG	7/16"X20	9/16"X18	O904	30.5	8.5	14	19	19
20F9-06OG	9/16"X18	11/16"X16	O906	34.5	10	16	22	22
20F9-08OG	3/4"X16	13/16"X16	O908	37.5	11	19	27	27
20F9-10OG	7/8"X14	1"X14	O910	45.2	13.5	22	30	30
20F9-12OG	1.1/16"X12	1.3/16"X12	O912	52	15	27	36	36
20F9-16OG	1.5/16"X12	1.7/16"X12	O916	56	15	33	41	41
20F9-20OG	1.5/8"X12	1.11/16"X12	O920	59	15	41	50	50
20F9-24OG	1.7/8"X12	2"X12	O924	63	16	48	55	60


注: E端与ISO 11926-1油口相配。 Note: E end is connected with ISO 11926-1 port.

NB200-F



ORFS 螺母
ORFS TUBE END NUT


代号 PART NO.	螺纹 E THREAD	英制衬套INCH SLEEVE		公制衬套METRIC SLEEVE		尺寸DIMENSIONS	
		管子外径O.D.	衬套代号 NO.	管子外径O.D.	衬套代号 NO.	L	S2
NB200-04F	9/16"X18	1/4"	NB300-04F	6	NB500-06F	14.7	19
NB200-06F	11/16"X16	3/8"	NB300-06F	10	NB500-10F	17	22
NB200-08F	13/16"X16	1/2"	NB300-08F	12	NB500-12F	21	27
NB200-10F	1"X14	5/8"	NB300-10F	16	NB500-16F	23.5	30
NB200-12F	1.3/16"X12	3/4"	NB300-12F	20	NB500-20F	26	36
NB200-16F	1.7/16"X12	1"	NB300-16F	25	NB500-25F	27.8	41
NB200-20F	1.11/16"X12	1.1/4"	NB300-20F	30	NB500-30F	27.8	50
NB200-24F	2"X12	1.1/2"	NB300-24F	38	NB500-38F	27.8	60



NB300-F

ORFS英制管衬套
ORFS INCH SLEEVE


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS	
			D	L
NB300-04F	9/16"X18	1/4"	12.8	8.5
NB300-06F	11/16"X16	3/8"	15.8	8.5
NB300-08F	13/16"X16	1/2"	18.9	8.5
NB300-10F	1"X14	5/8"	23.4	9
NB300-12F	1.3/16"X12	3/4"	27.9	12.5
NB300-16F	1.7/16"X12	1"	34.2	14
NB300-20F	1.11/16"X12	1.1/4"	40.6	14
NB300-24F	2"X12	1.1/2"	48.5	14



NB500-F

ORFS公制管衬套
ORFS METRIC SLEEVE


代号 PART NO.	螺纹 THREAD	管子外径 TUBE O.D.	尺寸 DIMENSIONS	
			D	L
NB500-06F	9/16"X18	6	12.8	8.5
NB500-10F	11/16"X16	10	15.8	8.5
NB500-12F	13/16"X16	12	18.9	8.5
NB500-16F	1"X14	16	23.4	9
NB500-20F	1.3/16"X12	20	27.9	12.5
NB500-25F	1.7/16"X12	25	34.2	14
NB500-30F	1.11/16"X12	30	40.6	14
NB500-38F	2"X12	38	48.5	14



2NU

布锥管外螺纹/ 美制NPSM内螺纹60° 外锥
NPT MALE / NPSM FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS				
	E	F	A	B	L	S1	S2
2NU-02	Z1/8"X27	1/8"X27	10.5	3.5	25.5	12	15
2NU-02-04	Z1/8"X27	1/4"X18	10.5	4.6	27.5	12	19
2NU-04-02	Z1/4"X18	1/8"X27	15	3.5	30	14	15
2NU-04	Z1/4"X18	1/4"X18	15	4.6	32	17	19
2NU-04-06	Z1/4"X18	3/8"X18	15	6	33	17	22
2NU-06	Z3/8"X18	3/8"X18	16	6	34.5	19	22
2NU-06-04	Z3/8"X18	1/4"X18	16	4.6	33	19	19
2NU-06-08	Z3/8"X18	1/2"X14	16	7.5	36	19	27
2NU-08	Z1/2"X14	1/2"X14	19.5	7.5	41.5	22	27
2NU-08-04	Z1/2"X14	1/4"X18	19.5	4.6	38.5	22	19
2NU-08-06	Z1/2"X14	3/8"X18	19.5	6	39.5	22	22
2NU-12	Z3/4"X14	3/4"X14	19.5	8.9	44.5	30	32
2NU-12-06	Z3/4"X14	3/8"X18	19.5	6	41.5	30	22
2NU-12-08	Z3/4"X14	1/2"X14	19.5	7.5	43.5	30	27
2NU-12-16	Z3/4"X14	1"X11.5	19.5	10.5	46.5	32	41
2NU-16-12	Z1"X11.5	3/4"X14	21.5	8.9	51.5	36	32
2NU-16	Z1"X11.5	1"X11.5	25.5	10.5	52.5	36	41
2NU-16-20	Z1"X11.5	1.1/4"X11.5	25.5	11.2	58.5	41	50
2NU-20-16	Z1.1/4"X11.5	1"X11.5	26.5	10.5	55.5	36	41
2NU-20	Z1.1/4"X11.5	1.1/4"X11.5	26.5	11.2	59.5	46	50
2NU-20-24	Z1.1/4"X11.5	1.1/2"X11.5	26.5	11.2	59.5	46	55
2NU-24-20	Z1.1/2"X11.5	1.1/4"X11.5	27.5	11.2	62.5	50	50
2NU-24	Z1.1/2"X11.5	1.1/2"X11.5	27.5	11.2	62.5	50	55
2NU-32	Z2"X11.5	2"X11.5	27.5	11.2	64.5	65	70



7NU-S

布锥管内螺纹/ 美制NPSM内螺纹60° 外锥
NPT FEMALE / NPSM FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	B	L	S1	S2
7NU-02S	Z1/8"X27	1/8"X27	3.5	24	17	15
7NU-04-02S	Z1/4"X18	1/8"X27	3.5	29	19	15
7NU-04S	Z1/4"X18	1/4"X18	4.6	31.5	19	19
7NU-04-06S	Z1/4"X18	3/8"X18	6	33	19	22
7NU-06S	Z3/8"X18	3/8"X18	6	34	22	22
7NU-08-06S	Z1/2"X14	3/8"X18	6	39	30	22
7NU-08S	Z1/2"X14	1/2"X14	7.5	41	30	27
7NU-12S	Z3/4"X14	3/4"X14	8.9	44	36	32
7NU-16S	Z1"X11.5	1"X11.5	10.5	51.5	41	41
7NU-20S	Z1.1/4"X11.5	1.1/4"X11.5	11.2	55	50	50
7NU-24S	Z1.1/2"X11.5	1.1/2"X11.5	11.2	55.5	60	55
7NU-32S	Z2"X11.5	2"X11.5	11.5	57	70	70



2NU9

90° 弯布锥管外螺纹/ 美制NPSM内螺纹60° 外锥
90° ELBOW NPT MALE/NPSM FEMALE 60° CONE


代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
2NU9-02	Z1/8"X27	1/8"X27	21	3.5	11	15
2NU9-02-04	Z1/8"X27	1/4"X18	21	4.6	11	19
2NU9-04-02	Z1/4"X18	1/8"X27	25.5	3.5	14	15
2NU9-04	Z1/4"X18	1/4"X18	25.5	4.6	14	19
2NU9-04-06	Z1/4"X18	3/8"X18	25.5	6	14	22
2NU9-06-04	Z3/8"X18	1/4"X18	31	4.6	19	19
2NU9-06-08	Z3/8"X18	1/2"X14	31	7.5	19	27
2NU9-08	Z1/2"X14	1/2"X14	37.3	7.5	22	27
2NU9-08-06	Z1/2"X14	3/8"X18	36.7	6	22	22
2NU9-08-12	Z1/2"X14	3/4"X14	37.5	8.9	24	32
2NU9-12	Z3/4"X14	3/4"X14	44	8.9	27	32
2NU9-12-08	Z3/4"X14	1/2"X14	44	7.5	27	27
2NU9-12-16	Z3/4"X14	1"X11.5	45	10.5	30	41
2NU9-16	Z1"X11.5	1"X11.5	50	10.5	33	41
2NU9-16-12	Z1"X11.5	3/4"X14	50	8.9	33	32
2NU9-20-16	Z1.1/4"X11.5	1"X11.5	54.5	10.5	41	41
2NU9-20	Z1.1/4"X11.5	1.1/4"X11.5	54.5	11.2	41	50
2NU9-24	Z1.1/2"X11.5	1.1/2"X11.5	59.5	11.2	48	55
2NU9-32	Z2"X11.5	2"X11.5	73.5	11.2	63	70



7NU9-S

90° 弯布锥管内螺纹/ 美制NPSM内螺纹60° 外锥
90° ELBOW NPT FEMALE/NPSM FEMALE 60° CONE

代号 PART NO.	螺纹 THREAD		尺寸 DIMENSIONS			
	E	F	A	B	S1	S2
7NU9-02S	Z1/8"X27	1/8"X27	17.8	3.5	16	15
7NU9-04-02S	Z1/4"X18	1/8"X27	22.5	3.5	19	15
7NU9-04S	Z1/4"X18	1/4"X18	22.5	4.6	19	19
7NU9-04-06S	Z1/4"X18	3/8"X18	22.5	6	19	22
7NU9-06S	Z3/8"X18	3/8"X18	25	6	24	22
7NU9-08-06S	Z1/2"X14	3/8"X18	31.2	6	30	22
7NU9-08S	Z1/2"X14	1/2"X14	31.2	7.5	30	27
7NU9-08-12S	Z1/2"X14	3/4"X14	31.2	8.9	30	32
7NU9-12-08S	Z3/4"X14	1/2"X14	34.5	7.5	33	27
7NU9-12S	Z3/4"X14	3/4"X14	34.5	8.9	33	32
7NU9-12-16S	Z3/4"X14	1"X11.5	34.5	10.5	33	41
7NU9-16S	Z1"X11.5	1"X11.5	41	10.5	41	41
7NU9-20S	Z1.1/4"X11.5	1.1/4"X11.5	43.2	11.2	50	50
7NU9-24S	Z1.1/2"X11.5	1.1/2"X11.5	52.8	11.2	63	55



1CFL
1DFL

1CFL-RN
1DFL-RN




公制螺纹卡套式/ 轻系列法兰ISO 6162-1
METRIC MALE BITE TYPE / L-SERIES FLANGE
ISO 6162-1

代 号 PART NO.	螺纹E THREAD	法兰型号 FLANGE SIZE	管子外径D1 TUBE O.D.	O形圈 O-RING	尺 寸 DIMENSIONS						压力等级 MPa
					d1	l	l1	L1	S1	S2	
1CFL-22-08	M22X1.5	1/2"	15	O210	30.2	6.8	41	56	24	27	31.5 轻系列L
1CFL-26-12	M26X1.5	3/4"	18	O214	38.1	6.8	45.5	62	30	32	
1CFL-30-12	M30X2	3/4"	22	O214	38.1	6.8	45.5	62	30	36	
1CFL-36-12	M36X2	3/4"	28	O214	38.1	6.8	45.5	62	30	41	
1CFL-36-16	M36X2	1"	28	O219	44.4	8	46.5	65	36	41	
1CFL-36-20	M36X2	1.1/4"	28	O222	50.8	8	51	67	36	41	
1CFL-45-20	M45X2	1.1/4"	35	O222	50.8	8	47.5	69	41	50	40 重系列S
1CFL-52-24	M52X2	1.1/2"	42	O225	60.3	8	53	76	46	60	
1DFL-24-08	M24X1.5	1/2"	16	O210	30.2	6.7	41.5	60	24	30	
1DFL-30-12	M30X2	3/4"	20	O214	38.1	6.7	46.5	68	30	36	
1DFL-36-12	M36X2	3/4"	25	O214	38.1	6.7	45	69	30	46	
1DFL-36-16	M36X2	1"	25	O219	44.4	8	46	70	36	46	
1DFL-42-16	M42X2	1"	30	O219	44.4	8	49.5	76	36	50	28 重系列S
1DFL-36-20	M36X2	1.1/4"	25	O222	50.8	8	48	72	41	46	
1DFL-42-20	M42X2	1.1/4"	30	O222	50.8	8	48.5	75	41	50	
1DFL-52-20	M52X2	1.1/4"	38	O222	50.8	8	50	81	46	60	
1DFL-52-24	M52X2	1.1/2"	38	O225	60.3	8	54	85	46	60	21重系列S

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加 "RN", 如1DFL-52-24RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DFL-52-24RN.

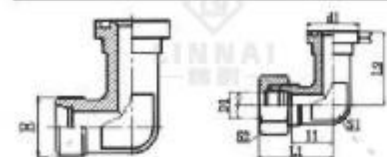

1CFL9
1DFL9

1CFL9-RN
1DFL9-RN



90° 弯公制螺纹卡套式/轻系列法兰ISO 6162-1
90° ELBOW METRIC MALE BITE TYPE/L-SERIES
FLANGE ISO 6162-1

代 号 PART NO.	螺纹E THREAD	法兰型号 FLANGE SIZE	管子外径D1 TUBE O.D.	O形圈 O-RING	尺 寸 DIMENSIONS								压力等级 MPa
					d1	l	l1	L1	L2	S1	S2		
1CFL9-22-08	M22X1.5	1/2"	15	O210	30.2	6.7	29	44	36	24	27	31.5 轻系列L	
1CFL9-26-12	M26X1.5	3/4"	18	O214	38.1	6.7	31.5	48	42	30	32		
1CFL9-30-12	M30X2	3/4"	22	O214	38.1	6.7	33.5	50	42	30	36		
1CFL9-36-16	M36X2	1"	28	O219	44.4	8	36.5	53	45	36	41	16 轻系列L	
1CFL9-45-20	M45X2	1.1/4"	35	O222	50.8	8	46.5	68	50	41	50		
1CFL9-52-24	M52X2	1.1/2"	42	O225	60.3	8	47	70	55	50	60		
1DFL9-24-08	M24X1.5	1/2"	16	O210	30.2	6.7	29.5	48	36	24	30	35 重系列S	
1DFL9-30-12	M30X2	3/4"	20	O214	38.1	6.7	32.5	54	42	30	36		
1DFL9-36-12	M36X2	3/4"	25	O214	38.1	6.7	33	57	42	30	46		
1DFL9-42-16	M42X2	1"	30	O219	44.4	8	36.5	63	45	36	50		
1DFL9-36-20	M36X2	1.1/4"	25	O222	50.8	8	43	67	50	41	46	28 重系列S	
1DFL9-42-20	M42X2	1.1/4"	30	O222	50.8	8	43.5	70	50	41	50		
1DFL9-52-20	M52X2	1.1/4"	38	O222	50.8	8	43	74	50	41	60		
1CFL9-52-24	M52X2	1.1/2"	38	O225	60.3	8	48	79	55	50	60		
												21重系列S	

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加 "RN", 如1DFL9-52-24RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DFL9-52-24RN.



1DFS


1DFS-RN

公制螺纹卡套式/ 重系列法兰ISO 6162-2
METRIC MALE BITE TYPE /
H-SERIES FLANGE ISO 6162-2

代 号 PART NO.	螺纹E THREAD	法兰型号 FLANGE SIZE	管子外径D1 TUBE O.D.	O形圈 O-RING	尺 寸 DIMENSIONS						压力等级 MPa
					d1	l	l1	L1	S1	S2	
1DFS-24-08	M24X1.5	1/2"	16	O210	31.7	7.8	44.5	63	24	30	40 重系列S
1DFS-24-12	M24X1.5	3/4"	16	O214	41.3	8.8	50.5	69	30	30	
1DFS-30-12	M30X2	3/4"	20	O214	41.3	8.8	50.5	72	30	36	
1DFS-36-16	M36X2	1"	25	O219	47.6	9.5	60	81	36	46	
1DFS-42-16	M42X2	1"	30	O219	47.6	9.5	60.5	87	36	50	
1DFS-42-20	M42X2	1.1/4"	30	O222	54	10.3	65.5	92	41	50	
1DFS-52-20	M52X2	1.1/4"	38	O222	54	10.3	67	98	46	60	31.5 重系列S
1DFS-52-24	M52X2	1.1/2"	38	O225	63.5	12.6	73	104	46	60	

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加 "RN", 如1DFS-52-24RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DFS-52-24RN.

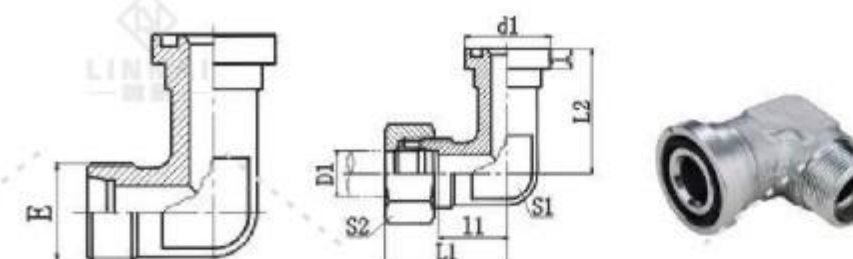

1DFS9


1DFS9-RN

90° 弯公制螺纹卡套式/ 重系列法兰ISO 6162-2
90° ELBOW METRIC MALE BITE TYPE/
H-SERIES FLANGE ISO 6162-2

代 号 PART NO.	螺纹E THREAD	法兰型号 FLANGE SIZE	管子外径D1 TUBE O.D.	O形圈 O-RING	尺 寸 DIMENSIONS							压力等级
					d1	l	l1	L1	L2	S1	S2	MPa
1DFS9-24-08	M24X1.5	1/2"	16	O210	31.7	7.8	29.5	48	39	24	30	40 重系列 S
1DFS9-24-12	M24X1.5	3/4"	16	O214	41.3	8.8	36.5	55	48	32	30	
1DFS9-36-12	M36X2	3/4"	25	O214	41.3	8.8	36	60	48	32	46	
1DFS9-36-16	M36X2	1"	25	O219	47.6	9.5	41	65	60	41	46	
1DFS9-42-16	M42X2	1"	30	O219	47.6	9.5	41.5	68	60	41	50	
1DFS9-42-20	M42X2	1.1/4"	30	O222	54	10.3	44.5	71	68	46	50	
1DFS9-52-20	M52X2	1.1/4"	38	O222	54	10.3	45	76	68	46	60	31.5
1DFS9-52-24	M52X2	1.1/2"	38	O225	63.5	12.6	56	87	76	50	60	重系列S

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加 "RN", 如1DFS9-52-24RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example 1DFS9-52-24RN.

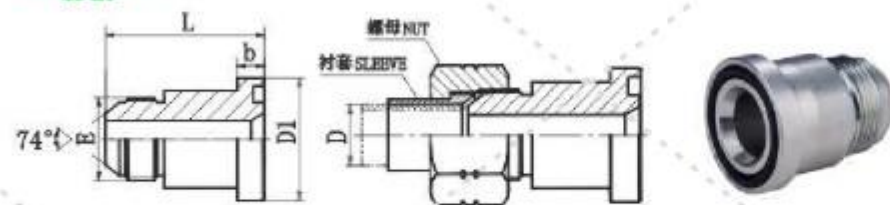


1JFL

美制JIC外螺纹74° 外锥/轻系列
法兰ISO 6162

JIC MALE 74° CONE/L-SERIES
FLANGE ISO 6162-1

代号 PART NO.	螺纹 THREAD E	法兰型号 FLANGE SIZE	O 形圈 O RING	尺寸 DIMENSIONS		
				b	D1	L
1JFL-08	3/4"X16	1/2"	O210	6.73	30.2	43.5
1JFL-08-12	3/4"X16	3/4"	O214	6.73	38.1	45.4
1JFL-10-08	7/8"X14	1/2"	O210	6.73	30.2	48
1JFL-10-12	7/8"X14	3/4"	O214	6.73	38.1	48
1JFL-12-08	1.1/16"X12	1/2"	O210	6.73	30.2	49
1JFL-12-16	1.1/16"X12	1"	O219	8	44.4	52.2
1JFL-16-12	1.5/16"X12	3/4"	O214	6.73	38.1	52
1JFL-16	1.5/16"X12	1"	O219	8	44.4	53.4
1JFL-16-20	1.5/16"X12	1.1/4"	O222	8	50.8	52.2
1JFL-20-16	1.5/8"X12	1"	O219	8	44.4	54.5
1JFL-20	1.5/8"X12	1.1/4"	O222	8	50.8	53.1
1JFL-20-24	1.5/8"X12	1.1/2"	O225	8	60.3	56
1JFL-24-20	1.7/8"X12	1.1/4"	O222	8	50.8	56.5
1JFL-24	1.7/8"X12	1.1/2"	O225	8	60.3	59.2
1JFL-24-32	1.7/8"X12	2"	O228	9.53	71.4	60
1JFL-32	2.1/2"X12	2"	O228	9.53	71.4	66.3

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

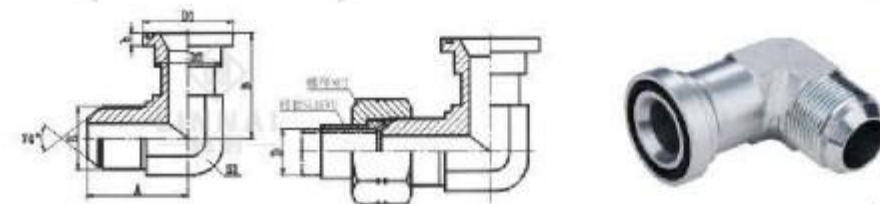

1JFL9

90° 弯美制JIC外螺纹74° 外锥/
轻系列法兰ISO 6162-1

90° ELBOW JIC MALE 74° CONE/
L-SERIES FLANGE ISO 6162-1

代号 PART NO.	螺纹 THREAD E	法兰型号 FLANGE SIZE	O 形圈 O RING	尺寸 DIMENSIONS					
				A	B	b	D1	D2	S1
1JFL9-08	3/4"X16	1/2"	O210	32.5	44	6.73	30.2	24	19
1JFL9-08-12	3/4"X16	3/4"	O214	38	54.1	6.73	38.1	31.7	27
1JFL9-10-08	7/8"X14	1/2"	O210	37.5	44	6.73	30.2	24	22
1JFL9-10-12	7/8"X14	3/4"	O214	41	54.1	6.73	38.1	31.7	27
1JFL9-12	1.1/16"X12	3/4"	O214	44.5	54.1	6.73	38.1	31.7	27
1JFL9-16	1.5/16"X12	1"	O219	49	60.2	8	44.4	38	33
1JFL9-16-12	1.5/16"X12	3/4"	O214	49	58	6.73	38.1	31.7	33
1JFL9-16-20	1.5/16"X12	1.1/4"	O222	54	66.5	8	50.8	43	41
1JFL9-20	1.5/8"X12	1.1/4"	O222	55.5	66.5	8	50.8	43	41
1JFL9-20-16	1.5/8"X12	1"	O219	55.5	65	8	44.4	38	41
1JFL9-20-24	1.5/8"X12	1.1/2"	O225	60	79.3	8	60.3	50	48
1JFL9-24	1.7/8"X12	1.1/2"	O225	62.5	79.3	8	60.3	50	48
1JFL9-24-20	1.7/8"X12	1.1/4"	O222	62.5	75.5	8	50.8	43	48
1JFL9-24-32	1.7/8"X12	2"	O228	74.5	108	9.53	71.4	62	63
1JFL9-32	2.1/2"X12	2"	O228	80	108	9.53	71.4	62	63

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.




1JFS

美制JIC外螺纹74° 外锥/重系列
法兰ISO 6162-2

JIC MALE 74° CONE /
S-SERIES FLANGE ISO 6162-2

代号 PART NO.	螺纹 THREAD E	法兰型号 FLANGE SIZE	O 形圈 O RING	尺寸 DIMENSIONS		
				b	D1	L
1JFS-08	3/4"X16	1/2"	O210	7.75	31.7	47.5
1JFS-10-08	7/8"X14	1/2"	O210	7.75	31.7	50
1JFS-10-12	7/8"X14	3/4"	O214	8.76	41.3	55
1JFS-12	1.1/16"X12	3/4"	O214	8.76	41.3	56.7
1JFS-12-16	1.1/16"X12	1"	O219	9.53	47.6	61.5
1JFS-16	1.5/16"X12	1"	O219	9.53	47.6	62.8
1JFS-16-20	1.5/16"X12	1.1/4"	O222	10.29	54	67.7
1JFS-20-16	1.5/8"X12	1"	O219	9.53	47.6	64
1JFS-20	1.5/8"X12	1.1/4"	O222	10.29	54	68.9
1JFS-20-24	1.5/8"X12	1.1/2"	O225	12.57	63.5	73.5
1JFS-24-20	1.7/8"X12	1.1/4"	O222	10.29	54	72
1JFS-24	1.7/8"X12	1.1/2"	O225	12.57	63.5	76.7

注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

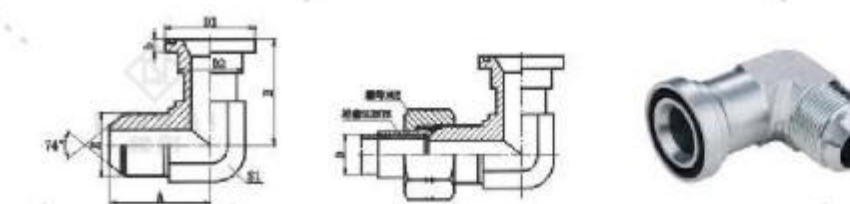


1JFS9

90° 弯美制JIC外螺纹74° 外锥/
重系列法兰ISO 6162-2

90° ELBOW JIC MALE 74° CONE /
S-SERIES FLANGE ISO 6162-2

代号 PART NO.	螺纹 THREAD E	法兰型号 FLANGE SIZE	O 形圈 O RING	尺寸 DIMENSIONS					
				A	B	b	D1	D2	S1
1JFS9-08	3/4"X16	1/2"	O210	32.5	44	7.75	31.7	19	
1JFS9-10-08	7/8"X14	1/2"	O210	37.5	46	7.75	31.7	22	
1JFS9-10-12	7/8"X14	3/4"	O214	41	54.1	8.76	41.3	27	
1JFS9-12	1.1/16"X12	3/4"	O214	44.2	54.1	8.76	41.3	27	
1JFS9-12-16	1.1/16"X12	1"	O219	48	60.2	9.6	47.6	33	
1JFS9-16-12	1.5/16"X12	3/4"	O214	49	57	8.76	41.3	33	
1JFS9-16-20	1.5/16"X12	1.1/4"	O222	54	66.5	10.29	54	41	
1JFS9-20	1.5/8"X12	1.1/4"	O222	55.5	66.5	10.29	54	41	
1JFS9-20-16	1.5/8"X12	1"	O219	55.5	65	9.53	47.6	41	
1JFS9-20-24	1.5/8"X12	1.1/2"	O225	59.5	79.3	12.57	63.5	48	
1JFS9-24	1.7/8"X12	1.1/2"	O225	62.5	79.3	12.57	63.5	48	
1JFS9-24-20	1.7/8"X12	1.1/4"	O222	62.5	70	10.29	54	48	


注：螺母及衬套需另行订货。管子直径D为公制时，配用螺母及衬套分别选用NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用NB200、NB300。 Note: Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.

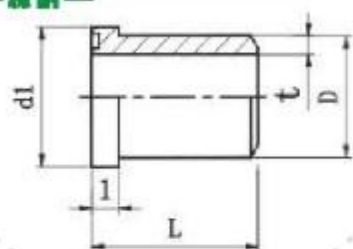

1FSW

重系列法兰ISO 6162-2 / 焊接管
S-SERIES FLANGE ISO 6162-2 / WELD TUBE


代 号 PART NO.	法兰型号 FLANGE SIZE	DXt	尺寸 DIMENSIONS				压力等级 MPa
			d1	D	I	L	
1FSW-08-16X2	1/2"	16X2	31.7	16	7.8	34	40
1FSW-08-20X2.5	1/2"	20X2.5		20			
1FSW-12-16X2	3/4"	16X2	41.3	16	8.8	38	
1FSW-12-20X2.5	3/4"	20X2.5		20			
1FSW-16-25X3	1"	25X3	47.6	25	9.5	40	
1FSW-16-30X4	1"	30X4		30			
1FSW-16-38X5	1"	38X5		38			
1FSW-20-25X3	1.1/4"	25X3	54	25	10.3	45	
1FSW-20-30X4	1.1/4"	30X4		30			
1FSW-20-38X5	1.1/4"	38X5		38			
1FSW-20-42X6	1.1/4"	42X6		42			
1FSW-24-38X5	1.1/2"	38X5	63.5	38	12.6	50	
1FSW-24-45X6.5	1.1/2"	45X6.5		45			
1FSW-24-48X8	1.1/2"	48X8		48			
1FSW-24-50X8	1.1/2"	50X8		50			
1FSW-32-60X8	2"	60X8	79.4	60	12.6	58	
1FSW-32-60X10	2"	60X10		60			

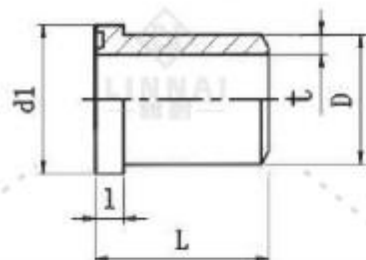

1FLW

轻系列法兰ISO 6162-1 / 焊接管
L-SERIES FLANGE ISO 6162-1 / WELD TUBE


代 号 PART NO.	法兰型号 FLANGE SIZE	DXt	尺寸 DIMENSIONS				压力等级 MPa
			d1	D	I	L	
1FLW-08-16X2	1/2"	16X2	30.2	16	6.8	41	34.5
1FLW-08-20X2.5	1/2"	20X2.5		20			
1FLW-12-25X3	3/4"	25X3	38.1	25	6.8	50	
1FLW-16-25X3	1"	25X3	44.4	25	8	50	
1FLW-16-30X4	1"	30X4		30			
1FLW-16-38X5	1"	38X5		38			
1FLW-20-25X3	1.1/4"	25X3	50.8	25	8	55	27.6
1FLW-20-30X4	1.1/4"	30X4		30			
1FLW-20-38X5	1.1/4"	38X5		38			
1FLW-20-42X6	1.1/4"	42X6		42			
1FLW-24-38X4	1.1/2"	38X4	60.3	38	8	57	20.7
1FLW-24-42X5	1.1/2"	42X5		42			
1FLW-24-45X5	1.1/2"	45X5		45			
1FLW-24-50X6	1.1/2"	50X6		50			
1FLW-32-55X5	2"	55X5	71.4	55	9.6	57	17.2
1FLW-32-60X8	2"	60X8		60			
1FLW-40-65X6	2.1/2"	65X6	84.1	65	9.6	58	
1FLW-40-70X7.5	2.1/2"	70X7.5		70			
1FLW-48-80X6	3"	80X6	101.6	80	9.6	58	13.8
1FLW-48-90X8	3"	90X8		90			

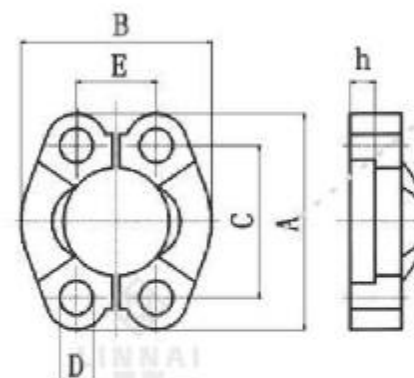

FL

ISO 6162-1—SAE J518轻系列对开法兰夹
ISO 6162-1—SAE J518 L-SERIES SPLIT
FLANGE CLAMPS


代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS					螺栓 BOLT	O形圈 O-RING	压力等级 MPa
		A	B	C	D	E			
FL-08	1/2"	53.8	46.1	38.1	9	17.5	M8X25	O210	34.5
FL-12	3/4"	65	52.4	47.6	11	22.2	M10X30	O214	
FL-16	1"	69.9	58.7	52.4	11	26.2	M10X30	O219	
FL-20	1.1/4"	79.2	73	58.7	11	30.2	M10X30	O222	27.6
FL-24	1.1/2"	93.7	82.6	69.9	13.5	35.7	M12X35	O225	20.7
FL-32	2"	101.6	96.8	77.8	13.5	42.9	M12X35	O228	
FL-48	3"	135	130.60	106.4	17.5	61.9	M16X50	O237	13.8

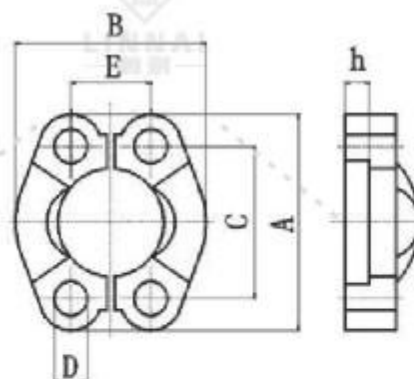

FS

ISO 6162-2—SAE J518 重系列对开法兰夹
ISO 6162-2—SAE J518 S-SERIES SPLIT
FLANGE CLAMPS


代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS					螺栓 BOLT	O形圈 O-RING	压力等级 Mpa
		A	B	C	D	E			
FS-08	1/2"	56.3	49.2	40.5	9	18.2	M8X30	O210	42
FS-12	3/4"	71.4	61.8	50.8	11	23.8	M10X35	O214	
FS-16	1"	81	71.4	57.2	13	27.8	M12X45	O219	
FS-20	1.1/4"	95.3	79.2	66.7	15	31.8	M14X50	O222	
FS-24	1.1/2"	112.8	96.8	79.4	17	36.6	M16X55	O225	
FS-32	2"	133.4	115.60	96.8	21	44.4	M20X70	O228	

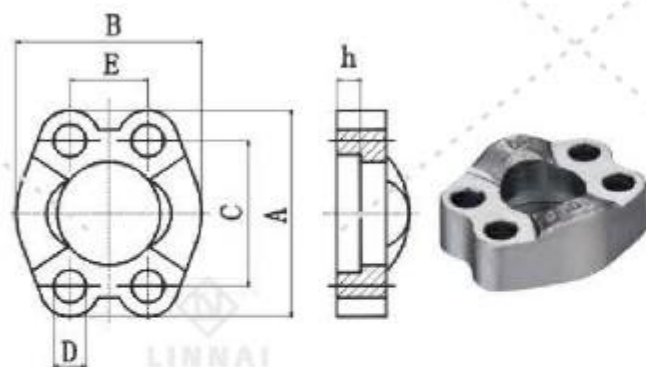

FL-W

ISO 6162-1—SAE J518 轻系列整体法兰夹
ISO 6162-1—SAE J518 L-SERIES
WHOLE FLANGE CLAMPS


代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS						螺栓 BOLT	O形圈 O-RING	压力等级 MPa
		A	B	C	D	E	h			
FL-08W	1/2"	53.8	46.1	38.1	9	17.5	6.2	M8X25	O210	34.5
FL-12W	3/4"	65	52.4	47.6	11	22.2	6.2	M10X30	O214	
FL-16W	1"	69.9	58.7	52.4	11	26.2	7.5	M10X30	O219	
FL-20W	1.1/4"	79.2	73	58.7	11	30.2	7.5	M10X30	O222	27.6
FL-24W	1.1/2"	93.7	82.6	69.9	13.5	35.7	7.5	M12X35	O225	20.7
FL-32W	2"	101.6	96.8	77.8	13.5	42.9	9	M12X35	O228	
FL-48W	3"	135	130.60	106.4	17.5	61.9	9	M16X50	O237	13.8

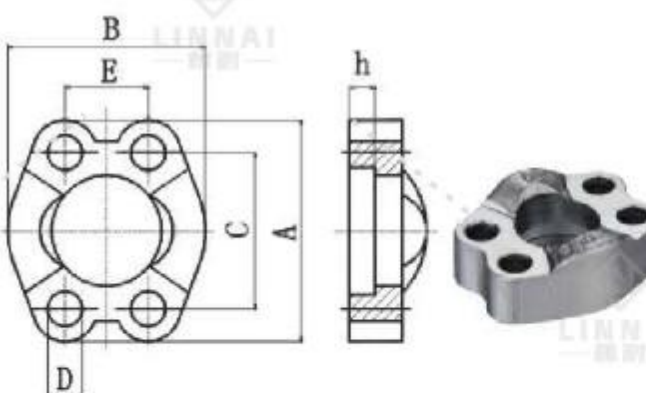

FS-W

ISO 6162-2—SAE J518 重系列整体法兰夹
ISO 6162-2—SAE J518 S-SERIES
WHOLE FLANGE CLAMPS

代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS						螺栓 BOLT	O形圈 O-RING	压力等级 MPa
		A	B	C	D	E	h			
FS-08W	1/2"	56.3	49.2	40.5	9	18.2	7.2	M8X30	O210	42
FS-12W	3/4"	71.4	61.8	50.8	11	23.8	8.2	M10X35	O214	
FS-16W	1"	81	71.4	57.2	13	27.8	9	M12X45	O219	
FS-20W	1.1/4"	95.3	79.2	66.7	15	31.8	9.8	M14X50	O222	
FS-24W	1.1/2"	112.8	96.8	79.4	17	36.6	12	M16X55	O225	
FS-32W	2"	133.4	115.60	96.8	21	44.4	12	M20X70	O228	

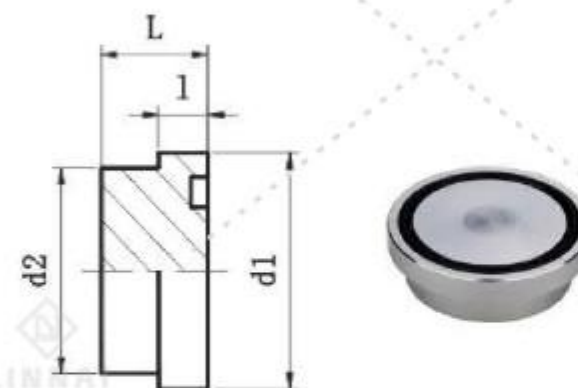

4FL

ISO 6162-1 轻系列法兰堵头
ISO 6162-1 L-SERIES FLANGE PLUG


代号 PART NO.	法兰型号 FLANGE SIZE	O形圈 O-RING	尺寸 DIMENSIONS				压力等级 MPa
			d1	d2	L	l	
4FL-08	1/2"	O210	30.2	24	16	6.8	34.5
4FL-12	3/4"	O214	38.1	31.5	17	6.8	
4FL-16	1"	O219	44.4	38	17	8	
4FL-20	1.1/4"	O222	50.8	43	17	8	27.6
4FL-24	1.1/2"	O225	60.3	50	19	8	20.7
4FL-32	2"	O228	71.4	62	19	9.6	
4FL-40	2.1/2"	O232	84.1	74	40	9.6	17.2
4FL-48	3"	O237	101.6	90	45	9.6	13.8



4FS

ISO 6162-2 重系列法兰堵头
ISO 6162-2 S-SERIES FLANGE PLUG

代号 PART NO.	法兰型号 FLANGE SIZE	O形圈 O-RING	尺寸 DIMENSIONS				压力等级 MPa
			d1	d2	L	l	
4FS-08	1/2"	O210	31.8	24	18	7.8	42
4FS-12	3/4"	O214	41.3	32	18	8.8	
4FS-16	1"	O219	47.6	38	18	9.5	
4FS-20	1.1/4"	O222	54	44	18	10.3	
4FS-24	1.1/2"	O225	63.5	51	20	12.6	
4FS-32	2"	O228	79.4	67	30	12.6	

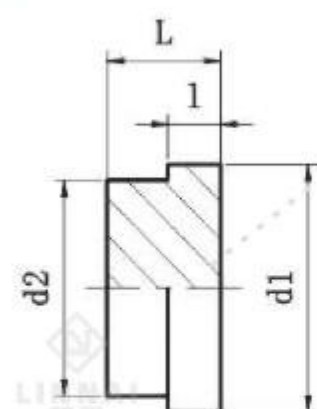


4FL-M



ISO 6162-1 轻系列平面法兰堵头
ISO 6162-1 L-SERIES FLANGE PLUG

代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS				压力等级 MPa
		d1	d2	L	l	
4FL-08M	1/2"	30.2	24	16	6.8	34.5
4FL-12M	3/4"	38.1	31.5	17	6.8	
4FL-16M	1"	44.4	38	17	8	
4FL-20M	1.1/4"	50.8	43	17	8	27.6
4FL-24M	1.1/2"	60.3	50	19	8	20.7
4FL-40M	2.1/2"	84.1	74	40	9.6	17.2
4FL-48M	3"	101.6	90	45	9.6	13.8

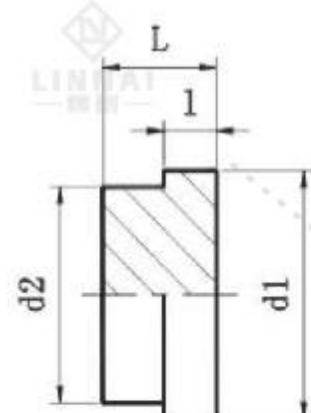


4FS-M



ISO 6162-2 重系列平面法兰堵头
ISO 6162-2 S-SERIES FLANGE PLUG

代号 PART NO.	法兰型号 FLANGE SIZE	尺寸 DIMENSIONS				压力等级 MPa
		d1	d2	L	l	
4FS-08M	1/2"	31.8	24	18	7.8	42
4FS-12M	3/4"	41.3	32	15	8.8	
4FS-16M	1"	47.6	38	16	9.5	
4FS-20M	1.1/4"	54	44	16	10.3	
4FS-24M	1.1/2"	63.5	51	19	12.6	
4FS-32M	2"	79.4	67	30	12.6	




4MN-WD



公制外螺纹胶垫密封内六角堵头
METRIC MALE CAPTIVE SEAL
HOLLOW HEX PLUG

代号 PART NO.	螺纹 THREAD E	胶垫 CAPTIVE E端	尺寸 DIMENSIONS		
			A	L	S1
4MN-10WD	M10X1	WD-B02	8	12	5
4MN-12WD	M12X1.5	WD-M12	12	17	6
4MN-14WD	M14X1.5	WD-B04	12	17	6
4MN-16WD	M16X1.5	WD-M16	12	17	8
4MN-18WD	M18X1.5	WD-M18	12	17	8
4MN-22WD	M22X1.5	WD-M22	14	19	10
4MN-26WD	M26X1.5	WD-B12	16	21	12
4MN-27WD	M27X2	WD-B12	16	21	12
4MN-33WD	M33X2	WD-B16	18	24.5	17
4MN-42WD	M42X2	WD-B20	20	26.5	22
4MN-48WD	M48X2	WD-B24	22	28.5	24



4O



美制SAE外螺纹带O形圈堵头轻系列ISO 11926-3
SAE O-RING BOSS PLUG L-SERIES ISO 11926-3

代号 PART NO.	螺纹 THREAD E	O形圈 O-RING E端	尺寸 DIMENSIONS		
			A	L	S1
4O-02	5/16"X24	O902	7.54	14.6	12
4O-03	3/8"X24	O903	7.54	14.6	14
4O-04	7/16"X20	O904	9.1	16	14
4O-05	1/2"X20	O905	9.1	16	17
4O-06	9/16"X18	O906	9.9	17.5	17
4O-10	7/8"X14	O910	12.7	23	27
4O-12	1.1/16"X12	O912	15.1	26.5	32
4O-14	1.3/16"X12	O914	15.1	27	36
4O-16	1.5/16"X12	O916	15.1	27.5	38
4O-20	1.5/8"X12	O920	15.1	30	50
4O-24	1.7/8"X12	O924	15.1	30	55
4O-32	2.1/2"X12	O932	15.1	32	70




4H

公制外螺纹轻系列堵头ISO 6149-3
METRIC MALE L-SERIES PLUG ISO 6149-3

代号 PART NO.	螺纹 THREAD	O形圈 O-RING	尺寸 DIMENSIONS		
	E	E端	A	L	S1
4H-12	M12X1.5	O09.3X2.4	11	19.5	17
4H-14	M14X1.5	O11.3X2.4	11	19.5	19
4H-16	M16X1.5	O13.3X2.4	12.5	23	22
4H-18	M18X1.5	O15.3X2.4	14	24.5	24
4H-22	M22X1.5	O19.3X2.4	15	27.5	27
4H-27	M27X2	O23.5X3.0	18.5	32	32
4H-42	M42X2	O38.5X3.0	19	37	50


注：可与ISO 9974-1油口相配，去掉挡圈与ISO 6149-1油口相配。
Note: fit for ISO 9974-1 port or ISO 6149-1 port when useless of retaining ring.

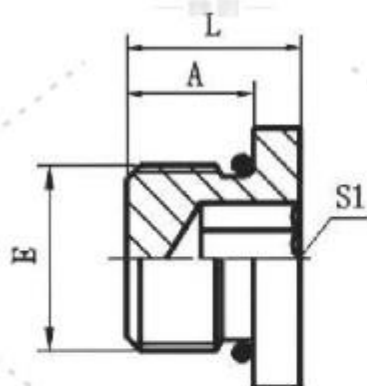

4ON

美制SAE外螺纹带O形圈
内六角堵头轻系列ISO 11926-3
SAE O-RING BOSS HOLLOW HEX PLUG L-SERIES
ISO 11926-3

代号 PART NO.	螺纹 THREAD	O形圈 O-RING	尺寸 DIMENSIONS		
	E	E端	A	L	S1
4ON-04	7/16"X20	O904	9.1	11.5	5
4ON-05	1/2"X20	O905	9.1	11.5	5
4ON-06	9/16"X18	O906	9.9	12.2	6
4ON-08	3/4"X16	O908	11.1	14.3	8
4ON-10	7/8"X14	O910	12.7	16	10
4ON-16	1.5/16"X12	O916	15.1	19	16
4ON-20	1.5/8"X12	O920	15.1	19	19

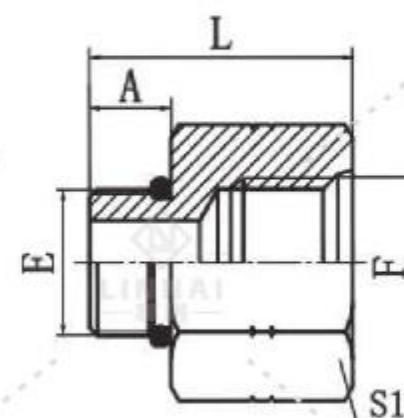

5O

美制SAE外螺纹带O形圈轻系列ISO 11926-3 /
美制SAE内螺纹ISO 11926-1
SAE O-RING BOSS L-SERIES ISO 11926-3 /
SAE FEMALE ISO 11926-1

代 号 PART NO.	螺 纹 THREAD		O形圈 O-RING	尺 寸 DIMENSIONS		
	E	F	E端	A	L	S1
5O-04-06	7/16"X20	9/16"X18	O904	9.14	31	22
5O-06-04	9/16"X18	7/16"X20	O906	9.93	28	17
5O-06-08	9/16"X18	3/4"X16	O906	9.93	36	27
5O-08-06	3/4"X16	9/16"X18	O908	11.13	31.5	22
5O-08-10	3/4"X16	7/8"X14	O908	11.13	38	30
5O-08-12	3/4"X16	1.1/16"X12	O908	11.13	36	32
5O-10-06	7/8"X14	9/16"X18	O910	12.7	20.6	27
5O-10-08	7/8"X14	3/4"X16	O910	12.7	35	27
5O-10-12	7/8"X14	1.1/16"X12	O910	12.7	43	36
5O-12-08	1.1/16"X12	3/4"X16	O912	15.09	26	32
5O-12-10	1.1/16"X12	7/8"X14	O912	15.1	40.5	32
5O-12-16	1.1/16"X12	1.5/16"X12	O912	15.1	45	41
5O-14-12	1.3/16"X12	1.1/16"X12	O914	15.1	43	36
5O-16-06	1.5/16"X12	9/16"X18	O916	15.1	26	38
5O-16-10	1.5/16"X12	7/8"X14	O916	15.1	26	38
5O-16-12	1.5/16"X12	1.1/16"X12	O916	15.1	43.5	38
5O-16-14	1.5/16"X12	1.3/16"X12	O916	15.1	43	38
5O-16-20	1.5/16"X12	1.5/8"X12	O916	15.1	46.5	50
5O-20-12	1.5/8"X12	1.1/16"X12	O920	15.1	35	50
5O-20-16	1.5/8"X12	1.5/16"X12	O920	15.1	42	50
5O-20-24	1.5/8"X12	1.7/8"X12	O920	15.1	48	55
5O-24-16	1.7/8"X12	1.5/16"X12	O924	15.1	35	55
5O-24-20	1.7/8"X12	1.5/8"X12	O924	15.1	45	55
5O-32-20	2.1/2"X12	1.5/8"X12	O932	15.1	32	70
5O-32-24	2.1/2"X12	1.7/8"X12	O932	15.1	32	70

接头概述及装配说明

O形圈平面密封接头 O-RING FACE SEAL FITTINGS

O形圈平面密封接头概述 O-RING FACE SEAL FITTINGS INSTRUCTIONS

◆ O形圈平面密封的基本结构可以有两种，第一种为：由接头体、O形圈、螺母、接管组成，接管与系统管路中的钢管焊接连接，如图P1所示。第二种为：由接头体、O形圈、螺母、衬套组成，管子被翻边成90°，如图P2所示。使用图P1所示的基本结构时，须保证焊接的质量。

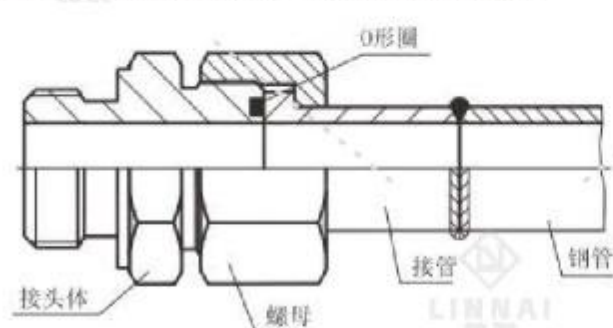


图 P1

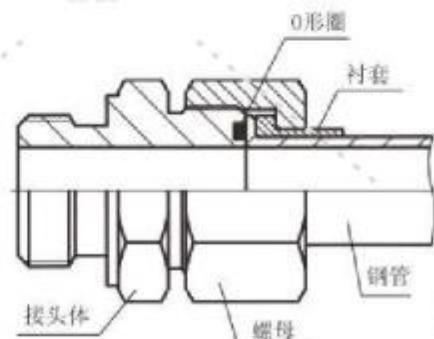


图 P2

◆ O形圈平面密封能很好的适用于高压系统，如使用硬度为N90的O形圈，能有更好的密封作用，更有效的防止泄漏。由于使用O形圈密封，因此使用的温度范围受O形圈材质的影响。

◆ O形圈平面密封接头的连接螺纹有两种：公制螺纹（见A1-A），美制ORFS螺纹（见J1-J）。

◆ O形圈密封槽的结构有三种，见图P3、P4、P5。其中P3结构能保持O形圈在安装时或垂直倒置时不掉下，方便安装；负压时O形圈不会被吸入油路。P4结构则不具备P3结构的前一优点。P5结构既不具备P3结构的前一优点，而且负压时会被吸入油路。



图 P3



图 P4



图 P5

◆ 对公制螺纹的O形圈槽如需按JB标准生产时，为图P5的结构。本公司建议选用图P3结构，用户可在订货时用文字说明。对美制ORFS螺纹的O形圈槽，本公司全部采用图P3结构生产，不生产图P4或图P5结构。

接头概述及装配说明

O形圈平面密封接头安装 O-RING FACE SEAL FITTINGS ASSEMBLY INSTRUCTIONS

◆ 安装Assembly

1、对图P1的基本结构，在安装前应先垂直锯下钢管（±1°以内），去掉内外径毛刺，并去油及氧化物，套上螺母后再焊接。对图P2的基本结构，在垂直锯下后用专用设备将管端翻边成90°，且尺寸D应在D1和D2之间，见图P6。

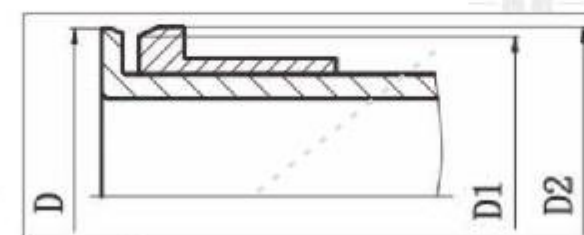


图 P6

2、如果接头体未放置O形圈，则应先放好O形圈。

3、按图P1或图P2，将接管或钢管翻边压住接头体O形圈，用手拧紧螺母，再用扭矩扳手按P的扭矩建议表板紧；如无扭矩扳手，可用普通扳手再拧紧1/4到1/2圈。

◆ 重复安装Reassembly

由于是平面密封型式且与安装力垂直，在安装过程中O形圈可能会扭曲，因此每次重复安装时，应检查O形圈有无损坏，必要时需更换。

◆ 泄漏原因Leakage reason

- 1、O形圈未正确的安放在O形圈槽内；
- 2、O形圈有损伤或损坏；
- 3、接头密封面、接管或翻边有凹坑或其他影响密封的缺陷；
- 4、翻边过大或过小，不能压住O形圈；
- 5、O形圈材质不适用于工作温度；
- 6、O形圈硬度不够；
- 7、连接螺母松开。

螺纹扭矩建议表 Recommended Thread Torque

公制O形圈平面密封扭矩、74° 公制扭矩

公制螺纹 Metric Thread

螺纹 THREAD	螺母扭矩 N.M NUT TORQUE
M12x1.5	10-20
M14x1.5	20-35
M16x1.5	25-40
M18x1.5	30-45
M20x1.5	35-50
M22x1.5	40-70
M24x1.5	40-70
M26x1.5	60-100
M30x2.0	80-120
M36x2.0	100-150
M42x2.0	150-220
M45x2.0	180-250
M52x2.0	200-300

美制 JIC 螺纹 JIC Thread

螺纹 THREAD	螺母扭矩 N.M NUT TORQUE
7/16"x20	15-16
1/2"x20	19-21
9/16"x18	24-28
3/4"x16	49-53
7/8"x14	77-85
1.1/16"x12	107-119
1.3/16"x12	127-140
1.5/16"x12	147-154
1.5/8"x12	172-181
1.7/8"x12	215-226
2.1/2"x12	332-350

英管螺纹 BSP Thread

螺纹 THREAD	螺母扭矩 N.M NUT TORQUE
G1/8"x28	11-12
G1/4"x19	25-28
G3/8"x19	41-48
G1/2"x14	72-82
G5/8"x14	96-110
G3/4"x14	124-137
G1"x11	151-165
G1.1/4"x11	192-206
G1.1/2"x11	261-275
G2"x11	343-357


美制 ORFS 螺纹 ORFS Thread

螺纹 THREAD	螺母扭矩 N.M NUT TORQUE
9/16"x18	14-16
11/16"x16	24-27
13/16"x16	43-47
1"x14	60-68
1.3/16"x12	90-95
1.7/16"x12	125-135
1.11/16"x12	170-190
2"x12	200-225


单位转换表 CONVERSION FACTOR

名称 DENOMINATION	单位 UNIT	转换单位 CONVERSION UNIT	转换系数 FACTOR
长度 LENGTH	英寸 in	毫米 mm	25.4
	毫米 mm	英寸 in	0.03937
	英尺 ft	米 m	0.3048
	米 m	英尺 ft	3.28084
面积 AREA	平方英寸 in ²	平方厘米 cm ²	6.4516
	平方厘米 cm ²	平方英寸 in ²	0.1550
体积 VOLUME	英加仑 gal	升 l	4.54609
	升 l	英加仑 gal	0.219969
	美加仑 gal	升 l	3.78541
	升 l	美加仑 gal	0.264172
	升 l	分米 ³	1
质量 MASS	磅 lb	千克 kg	0.453592
	千克 kg	磅 lb	2.204622
力矩 TORQUE	磅力·英寸 lbf.in	牛·米 N.m	0.112985
	牛·米 N.m	磅力·英寸 lbf.in	8.85075
压力 PRESSURE	磅力/英寸 ² psi	巴 bar	0.06895
	巴 bar	磅力/英寸 ² psi	14.5038
	磅力/英寸 ² psi	兆帕 MPa	0.006895
	兆帕 MPa	磅力/英寸 ² psi	145.038
	兆帕 MPa	巴 bar	10
	巴 bar	兆帕 MPa	0.1
	帕 Pa	巴 bar	10 ⁻⁵
速度 VELOCITY	英尺/秒 ft/s	米/秒 m/s	0.3048
	米/秒 m/s	英尺/秒 ft/s	3.28084
流量 FLOW RATE	英加仑/分 gal/min.	升/分 l/min.	4.54609
	升/分 l/min.	英加仑/分 gal/min.	0.219969
	美加仑/分 gal/min.	升/分 l/min.	3.78541
	升/分 l/min.	美加仑/分 gal/min.	0.264172
温度 TEMPERATURE	华氏度° F	摄氏度° C	5/9° (华氏温度° F-32)
	摄氏度° C	华氏度° F	摄氏度° C*9/5+32

密封件 Seal

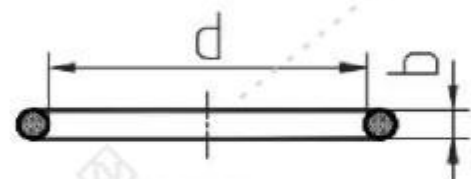

O形圈 O Ring

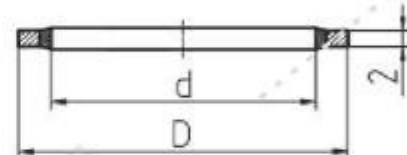

组合垫 Bonded Seal

DIN 24° 锥轻系列O形圈密封用O形圈
For DIN 24° Cone O-ring L.T.

O形圈代号 PART NO.	螺纹 THREAD	d	b	管子外径 TUBE O.D.
O04.5x1.5	M12X1.5	4.5	1.5	6
O06.5x1.5	M14X1.5	6.5	1.5	8
O08.0x1.5	M16X1.5	8.0	1.5	10
O10.0x1.5	M18X1.5	10.0	1.5	12
O12.0x2.0	M22X1.5	12.0	2.0	15
O15.0x2.0	M26X1.5	15.0	2.0	18
O15.0x2.0	M27X1.5	15.0	2.0	18
O20.0x2.0	M30X2	20.0	2.0	22
O26.0x2.0	M36X2	26.0	2.0	28
O32.0x2.5	M45X2	32.0	2.5	35
O38.0x2.5	M52X2	38.0	2.5	42

DIN 24° 锥重系列O形圈密封用O形圈
For DIN 24° Cone O-ring H.T.

O形圈代号 PART NO.	螺纹 THREAD	d	b	管子外径 TUBE O.D.
O04.5x1.5	M14X1.5	4.5	1.5	6
O06.5x1.5	M16X1.5	6.5	1.5	8
O08.0x1.5	M18X1.5	8.0	1.5	10
O10.0x1.5	M20X1.5	10.0	1.5	12
O11.0x2.0	M22X1.5	11.0	2.0	14
O13.0x2.0	M24X1.5	13.0	2.0	16
O16.3x2.4	M30X2	16.3	2.4	20
O20.3x2.4	M36X2	20.3	2.4	25
O25.3x2.4	M42X2	25.3	2.4	30
O33.3x2.4	M52X2	33.3	2.4	38

SAE法兰用O形圈
For SAE Flange O-ring


O形圈代号 PART NO.	法兰型号 FLANGE SIZE	d	b
O210	1/2"	18.64	3.53
O214	3/4"	24.99	3.53
O219	1"	32.92	3.53
O222	1.1/4"	37.69	3.53
O225	1.1/2"	47.22	3.53
O228	2"	56.74	3.53
O232	2.1/4"	69.44	3.53

JIS法兰用O形圈 For JIS Flange O Ring


O形圈代号 PART NO.	法兰型号 FLANGE SIZE	d	b
O212	5/8"	21.82	3.53

英管外螺纹O形圈密封接头用O形圈
For BSP Male O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O111	G1/4"X19	10.77	2.62
O113	G3/8"X19	13.94	2.62
O115	G1/2"X14	17.12	2.62
O910	G5/8"X14	19.18	2.46
O119	G3/4"X14	23.47	2.62
O217	G1"X11	29.74	3.53
O222	G1.1/4"X11	37.69	3.53
O224	G1.1/2"X11	44.04	3.53
O139	G2"X11	54	3

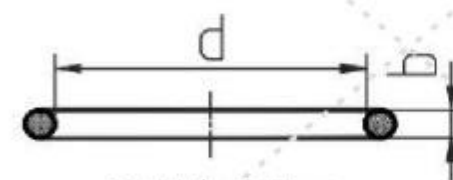

O形圈 O Ring

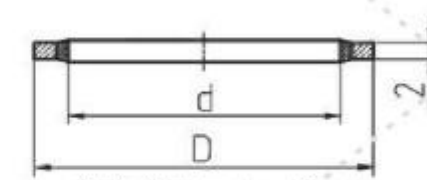

组合垫 Bonded Seal

美制ORFS外螺纹平面O形圈密封用O形圈
For ORFS Male O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O011	9/16"x18UNF	7.65	1.78
O012	11/16"x16UN	9.25	1.78
O014	13/16"x16UN	12.42	1.78
O016	1"x14UNF	15.6	1.78
O018	1.3/16"x12UN	18.77	1.78
O021	1.7/16"x12UN	23.52	1.78
O025	1.11/16"x12UN	29.87	1.78
O029	2"x12UN	37.82	1.78

英管内螺纹60°外锥面用O形圈
For BSP Female 60° Cone O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O171	G3/4"X14	17.1	1.6
O221	G1"X11	22.1	1.6
O291	G1.1/4"X11	29.1	1.6
O351	G1.1/2"X11	35.1	1.6

水管接头用O形圈 For Waterwash O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O10.0X2.0	M22x1.5	10.0	2.0

SAE矿用接头用O形圈 For SAE Staplelok O-ring

O形圈代号 PART NO.	接头规格 FITTING SIZE	d	b
O06.0X2.0	-04	6.0	2.0
O10.0X2.0	-06	10.0	2.0
O13.0X2.5	-08	13.0	2.5
O19.0X2.5	-12	19.0	2.5
O25.0X2.5	-16	25.0	2.5
O33.0X2.5	-20	33.0	2.5
O40.0X3.0	-24	40.0	3.0
O50.0X3.0	-32	50.0	3.0

美制SAE外螺纹 O形圈密封接头用O形圈
For SAE Male O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O904	7/16"x20UNF	8.92	1.83
O905	1/2"x20UNF	10.52	1.83
O906	9/16"x18UNF	11.89	1.98
O908	3/4"x16UNF	16.36	2.21
O910	7/8"x14UNF	19.18	2.46
O912	1.1/16"x12UN	23.47	2.95
O914	1.3/16"x12UN	26.62	2.95
O916	1.5/16"x12UN	29.74	2.95
O920	1.5/8"x12UN	37.46	3.00
O924	1.7/8"x12UN	43.69	3.00
O932	2.1/2"x12UN	59.36	3.00

六角端面密封用组合垫 Bonded Seal


组合垫代号 PART NO.	螺纹 THREAD	d	D
ZHD-10	M10, G1/8"	10.4	16
ZHD-14	M14, G1/4"	14.4	20
ZHD-16	M16	16.4	22
ZHD-18	M18, G3/8"	18.4	25
ZHD-22	M22, G1/2"	22.5	30
ZHD-24	M24	24.5	32
ZHD-27	M27, G3/4"	27.5	35
ZHD-30	M30	30.5	38
ZHD-33	M33, G1"	33.5	42
ZHD-36	M36	36.6	46
ZHD-42	M42, G1.1/4"	42.6	53
ZHD-45	M45	45.6	56
ZHD-48	M48, G1.1/2"	48.7	60
ZHD-52	M52	52.7	66
ZHD-60	M60, G2"	60.7	75



O形圈 O Ring


公制外螺纹可调柱端用O形圈
For Metric Male Adjustable Stud End O-ring

O形圈代号 PART NO.	螺纹 THREAD	d	b
O06.1X1.6	M8X1	6.1	1.6
O08.1X1.6	M10X1	10.0	2.0
O09.3X2.4	M12X1.5	9.3	2.4
O11.3X2.4	M14X1.5	11.3	2.4
O13.3X2.4	M16X1.5	13.3	2.4
O15.3X2.4	M18X1.5	15.3	2.4
O17.3X2.4	M20X1.5	17.3	2.4
O19.3X2.4	M22X1.5	19.3	2.4
O21.3X3.0	M24X1.5	21.3	3.0
O23.5X3.0	M26X1.5	23.5	3.0
O23.5X3.0	M27X2	23.5	3.0
O26.5X3.0	M30X2	26.5	3.0
O29.5X3.0	M33X2	29.5	3.0
O38.5X3.0	M42X2	38.5	3.0
O44.5X3.0	M48X2	44.5	3.0
O56.2X3.0	M60X2	56.2	3.0

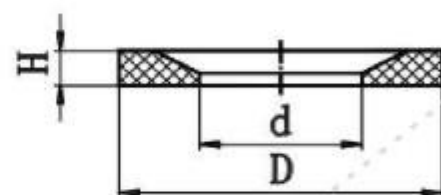


胶垫 CAPTIVE

胶垫代号 PART NO.	螺纹 THREAD	d	D	H
WD-B02	G1/8"X28	8.4	11.9	1.0
WD-B04	G1/4"X19	11.6	16.5	1.5
WD-B06	G3/8"X19	14.7	18.9	1.5
WD-B08	G1/2"X14	18.5	23.9	1.5
WD-B12	G3/4"X14	23.9	29.2	1.5
WD-B16	G1"X11	29.7	35.7	2.0
WD-B20	G1.1/4"X11	38.8	45.8	2.0
WD-B24	G1.1/2"X11	44.7	50.7	2.0
WD-B02	M10X1	8.4	11.9	1.0
WD-M12	M12X1.5	9.8	14.4	1.5
WD-B04	M14X1.5	11.6	16.5	1.5
WD-M16	M16X1.5	13.8	18.9	1.5
WD-M18	M18X1.5	15.7	20.9	1.5
WD-M20	M20X1.5	17.8	22.9	1.5
WD-M22	M22X1.5	19.6	24.3	1.5
WD-B12	M26X1.5	23.9	29.2	1.5
WD-B12	M27X2	23.9	29.2	1.5
WD-B16	M33X2	29.7	35.7	1.5
WD-B20	M42XX	38.8	45.8	2.0
WD-B24	M48X2	44.7	50.7	2.0

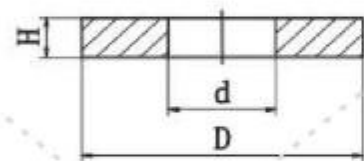

压力表紫铜垫片 Gauge copper gasket

垫片代号 PART NO.	d	D	H
DP-B04G	6	11	2
DP-B08G	6	18	2




压力表钢垫片 Pressure gauge steel gasket

垫片代号 PART NO.	d	D	H
DP-B04DK	6	11.3	4.5
DP-B08DK	12	18.5	5

接头工作压力表


螺纹	公制外螺纹O形圈密封重系列	公制外螺纹O形圈密封可调柱端重系列	公制外螺纹O形圈密封轻系列	公制外螺纹O形圈密封可调柱端轻系列	公制外螺纹弹性密封柱端轻系列 (E型)	公制外螺纹弹性密封柱端重系列 (E型)
M8X1	63	40	40	31.5	-	-
M10X1	63	40	40	31.5	25	-
M12X1.5	63	40	40	31.5	25	63
M14X1.5	63	40	40	31.5	25	63
M16X1.5	63	40	31.5	25	25	63
M18X1.5	63	40	31.5	25	25	63
M20X1.5	-	-	-	-	-	63
M22X1.5	-	-	-	-	16	40
M22X1.5	63	40	31.5	25	-	-
M26X1.5	-	-	-	-	16	-
M27X2	40	40	20	16	-	40
M30X2	40	40	20	16	-	-
M33X2	-	-	-	-	10	40
M33X2	40	31.5	20	16	-	-
M42X2	25	25	20	16	-	-
M42X2	-	-	-	-	10	25
M48X2	25	20	20	16	10	25
M60X2	25	16	16	10	-	-

螺纹			
	公制外螺纹 74° 锥密封	公制外螺纹O 形圈密封	公制外螺纹 60° 锥密封
M10X1	35	-	-
M10X1	35	-	-
M12X1.25	-	63	-
M12X1.5	35	-	-
M14X1.5	35	63	34.5
M16X1.5	25	63	-
M18X1.5	25	63	34.5
M22X1.5	20	63	34.5
M24X1.5	20	-	-
M27X1.5	20	40	-
M27X2	-	-	27.5
M30X2	20	-	-
M30X1.5	-	40	-
M33X2	16	-	20.5
M36X2	16	-	-
M36X2	-	40	-
M39X2	12.5	-	-
M39X2	-	25	-
M42X2	12.5	-	17
M42X2	-	25	-
M45X2	10	-	-
M45X2	-	25	-
M52X2	-	25	-
M60X2	-	25	-
M64X2	-	25	-

螺纹	
	日本公制外 螺纹60° 锥 密封
M12X1.5	34.5
M14X1.5	34.5
M16X1.5	34.5
M18X1.5	34.5
M20X1.5	34.5
M22X1.5	34.5
M24X1.5	27.5
M27X1.5	27.5
M30X1.5	20.5
M33X1.5	20.5
M36X1.5	17
M42X1.5	17

接头工作压力表

螺纹				
英管外螺纹 60° 锥面密封	日本英管外 螺纹60° 锥 面密封	英管外螺纹 O形圈密封	英管外螺纹 O形圈密封 可调柱端	
G1/8"X28	34.5	34.5	40	31.5
G1/4"X19	34.5	34.5	40	31.5
G3/8"X19	34.5	34.5	31.5	25
G1/2"X14	34.5	34.5	31.5	25
G3/4"X14	27.5	27.5	20	16
G1"X11	20.5	20.5	20	16
G1.1/4"X11	17	17	20	16
G1.1/2"X11	10.5	10.5	20	16
G2"X11	10.5	10.5	16	10

螺纹	
英管外螺纹	
R1/8"X28	34.5
R1/4"X19	34.5
R3/8"X19	34.5
R1/2"X14	34.5
R3/4"X14	27.5
R1"X11	20.5
R1.1/4"X11	17
R1.1/2"X11	10.5
R2"X11	10.5

螺纹					
美制JIC 74° 锥密封	美制外螺纹 O形圈密封 重系列	美制外螺纹 O形圈密封 可调柱端重 系列	美制外螺纹 O形圈密封 轻系列	美制外螺纹 O形圈密封 可调柱端轻 系列	
5/16"X24	34.5	-	-	31.5	31.5
3/8"X24	34.5	63	40	31.5	31.5
7/16"X20	34.5	63	40	31.5	31.5
1/2"X20	34.5	63	40	31.5	31.5
9/16"X18	34.5	63	40	31.5	25
3/4"X16	31	63	40	31.5	25
7/8"X14	24	63	40	25	20
1.1/16"X12	24	40	40	25	20
1.3/16"X12	21	40	40	20	16
1.5/16"X12	21	40	31.5	20	16
1.5/8"X12	17	25	25	16	12.5
1.7/8"X12	14	25	20	16	12.5
2.1/2"X12	10.5	-	-	12.5	10

螺纹	
美制布锥管 外螺纹	
Z1/8"X27	34.5
Z1/4"X18	27.5
Z3/8"X18	21
Z1/2"X14	21
Z3/4"X14	17
Z1"X11.5	14
Z1.1/4"X11.5	8
Z1.1/2"X11.5	7

螺纹	
美制ORFS 外螺纹O形 圈密封	
9/16"X18	63
11/16"X16	63
13/16"X16	63
1"X14	40
1.3/16"X12	40
1.7/16"X12	40
1.11/16"X12	25
2"X12	25

SAE 法兰 规格		使用中等强 度螺栓 轻系列	使用高强度 螺栓 轻系列	使用中等强 度螺栓 重系列	使用高强度 螺栓 重系列
1/2 "		35	35	35	40
3/4 "		35	35	35	40
1 "		25	31.5	35	40
1.1/4 "		20	25	35	40
1.1/2 "		20	20	35	40
2 "		16	16	35	40

什么是客户定制产品？

下面的示例会为您未来的设计提供一些新的解决方案。

变径尺寸



一个接头可以几个接头组合

- 减少装配时间
- 降低泄漏可能性及成本
- 减少库存

加长接头



避免长管或者接头连接组合

非标准端口



管端及油口端
例如：连接公制及英制管

标准接头再加工



根据客户需求将标准接头再加工。
(短螺纹，内螺纹测压点接头等等)

有限孔径



孔 ≥ 0.3mm

焊接接头



大多用于非正常变化场合

集成块



过滤器接头



可以与您的过滤器配合，但需要提供尺寸

紧凑型接头



用于狭窄空间

法兰接头



ISO 6162(SAE3518)
按客户图纸要求